

FREE SHIPPING  
on all orders

Showrooms &amp; Events

My Account

Live Help - (800) 801-2207 - Available Now

Support / Help

Home

Shop By Room

Shop By Type

Shop By Brand

Inspiration Gallery

Item # or Keyword  
Advanced Search Tool

Product Home &gt; Outdoor Lighting &gt; Exterior Sconces &gt; Iron &amp; Rustic &gt; 92'

[View Larger Image](#)

Price: \$125.00

Show prices in: ☒ Free Shipping  
to Lower 48![Add To Cart](#)[Print/Email Spec Sheet](#)[Add to Your Project](#)[Add to Your Favorites](#)[Request More Information](#)

## 92130BRZ - Twigs Med Lantern By Kenroy International

Lighting Universe Part # 783413

**Twigs Sm Lantern****Finish:** Bronze**Diffuser:** Clear Seedy Glass Shade

Note: Bulbs are not included with this fixture.

**Mfr Product Id:**

92130BRZ

**Part #:**

783413

**Dimensions:**

Height: 14" - Diameter: 9" - P

**Voltage:**

120 Volt

**Usage:**

Exterior Damp

**Listing:**

UL Listed

**Usually Leaves  
Warehouse In:**

1 week

**Finish Options:**

Bronze

**Lamp Options:**

(2)60w CA10 Cand F

**Bulbs:**[36908 - 6 pack](#)[36908 - 60 pack](#)

Due to the application of certain finishes, slight color may occur.

### Why buy from Lighting Universe?

- [Free Shipping](#)

FREE SHIPPING  
on all orders

Showrooms &amp; Events

My Account

Live Help - (800) 801-2207 - Available Now

Support / Help

Home

Shop By Room

Shop By Type


Shop By Brand

Inspiration Gallery

Item # or Keyword  
Advanced Search Tool

Product Home &gt; Commercial Lighting &gt; Commercial Flood Lights &gt; Quartz &gt;

QB1

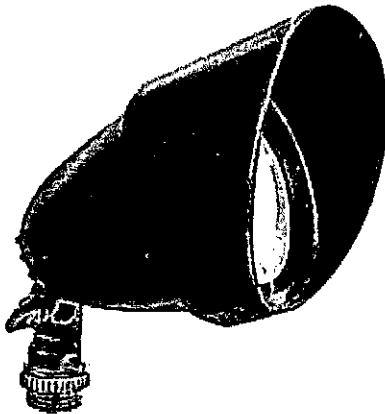

View Larger Image

Price: \$26.00

Show prices in: ☒ Free Shipping  
to Lower 48!

Add To Cart

Print/Email Spec Sheet

Add to Your Project

☒ Add to Your Favorites

Request More Information

## Quartz Flood Bullet - QB1 By RAB Electrical Manufacturing Lighting Universe Part # 266950

This 75 watt quartz Bullet Flood light features a silicone O-ring gaske thick tempered lens, integral and external cooling fins. It also has go plated socket contacts and 250°C Teflon coated wires for extended lamp life. Some of the features included in this high quality quartz flood light are:

- **Housing** - Precision die cast aluminum, 1/2" NPS threaded arm wi locking swivel and EZ Grip lock nut fits all standard mounting boxes.
- **Reflector** - Semi-specular anodized aluminum.
- **Lens Gasket** - High temperature silicone gasket stays in place during relamping.
- **Lens** - Thick tempered glass.
- **Socket** - Porcelain bi-pin GY 6.35 base with gold plated contacts and 250°C socket wires.
- **Finish** - Chip and fade resistant durable powder coat finish available in bronze, black, white, and verde green. Please see the finish option below.

The bulb is included with this fixture.

Mfr Product Id: QB1B  
Part #: 266950

**Dimensions:** Width: 5" - Length: 3.5" -

**Materials:** Die Cast Aluminum

**Voltage:** 120 Volt

**Usage:** Exterior Wet

**Listing:** UL Listed

**Usually Leaves**

**Warehouse In:** 3 to 5 business days


**Finish Options:** Black ☐

**Lamp Options:** (1)75w T4 Bi-Pin Hal F

**Bulbs:**

Q75GY6/12 - 1 bulb

Q75GY6/12 - 10 bulbs

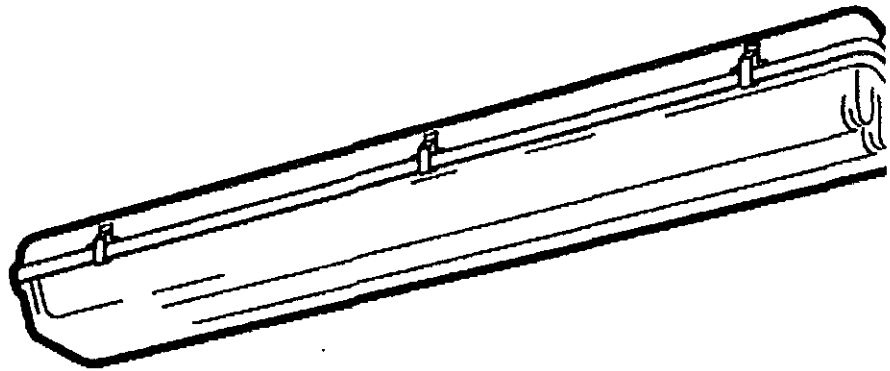

**Housing:** Rigid, one-piece (ASTM D635-74) reinforced polyester fiberglass, accepted by NSF and USDA. Robotically applied gasketing – 98% compression recovery, no seams, no porosity – forms moisture seal to diffuser. Celcon latches standard; stainless latches optional (OV450). OV451 supplied with plastic tamperproof latches, standard.


**Shielding:** D.R. acrylic diffuser or optional polycarbonate.

**Options:** Polycarbonate lens, stainless steel latches, low temperature ballast and wet location fittings. Damp location emergency ballast available.


**Electrical:** Fully wired for 120V, 60Hz AC operation, thermally protected, automatic resetting, Class P, sound rated A, high-power factor ballast, unless otherwise specified. Slimline shall be sound rated C. High Output shall be sound rated B. Electronic T8 shall be instant start, <20% harmonic distortion standard, specify suffix UNV for <10% harmonic distortion. Specify suffix UNV for universal voltage, 120 through 277V, 50/60Hz AC operation, Electronic T8 only. UL listed, wet wall or ceiling mount.

**Mounting:** Surface or pendant mount, individual or continuous row. For pendant mount, order CA450 Heavy Duty Chain Kit and OV450-Stem Set, specify length for both. WLF Fitting for use with water tight conduit, field installed. One each.

**Critical Application:** SIMKAR strives to offer the most current product designs and value. Consequently, all SIMKAR products are subject to redesign and revision. Critical applications such as size, operating temperature, or sensor operation should be confirmed with the factory.



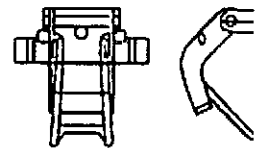


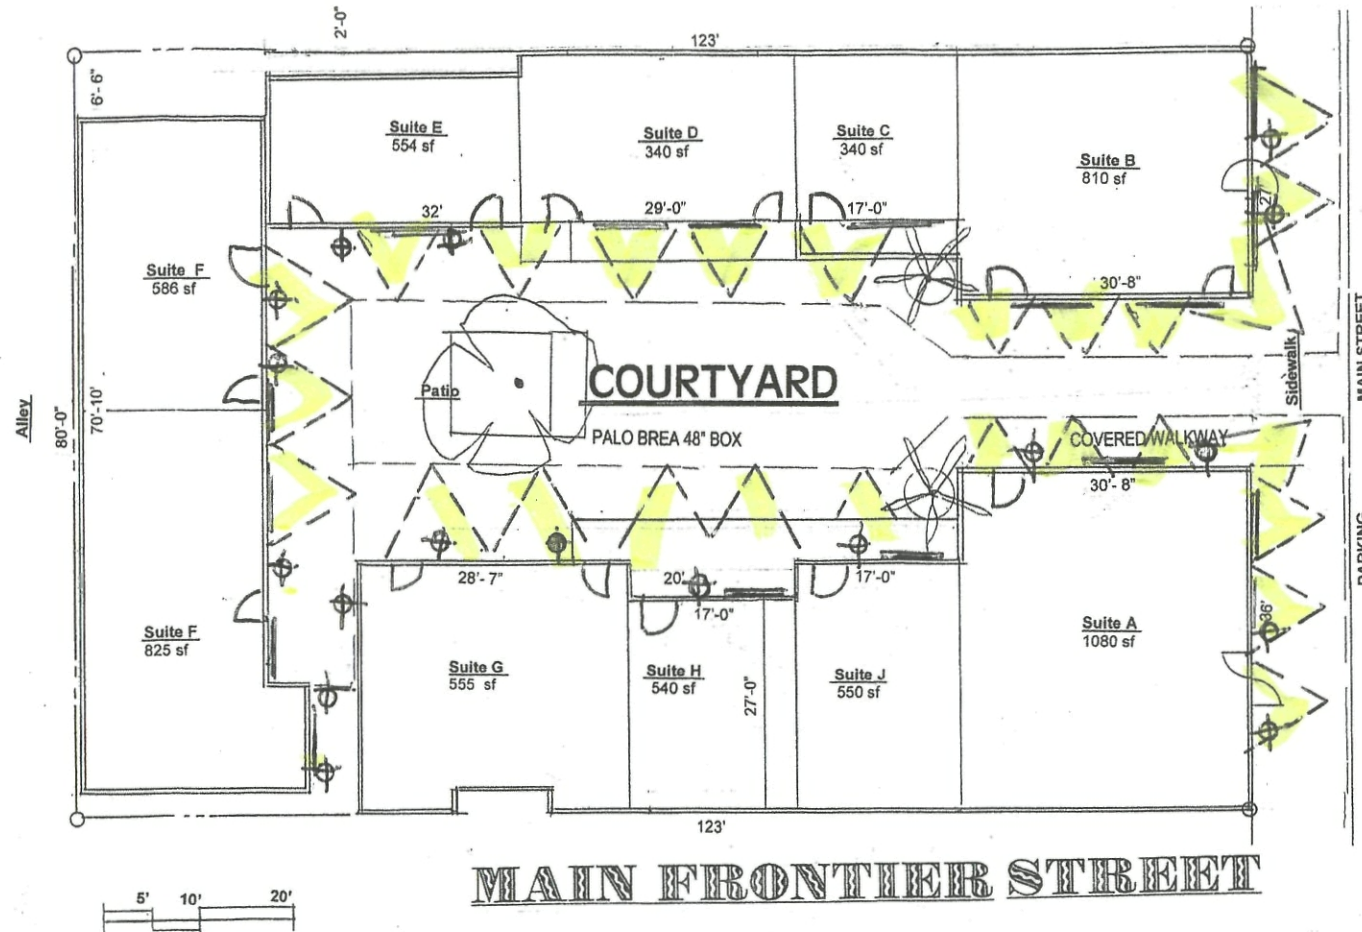
**Celcon latches,  
standard**



**Stainless steel latch  
specify SSTP**

# FRONTIER STREET LIGHTING PLAN CONCEPTUAL DRB

-  L1 Lantern Rustic Bronze Wall Mtd Below Canopy @ Each Shop Door  
 L2 Sign Light Shielded Quartz Flood Bullet Mtd at Canopy @ Sign  
 L3 Shielded Flourescent Mounted under canopy at High Side



49-DR-2006  
5/12/2006

## PROJECT DATA

PROJECT: FRONTIER STREET SHOPS  
 ADDRESS: 7240 E. MAIN STREET  
 ZONING: C2 DOWNTOWN OVERLAY  
 LEGAL: APN 130-23-118  
 LOTS 16 AND 17 BLOCK 6 SCOTTSDALE  
 LOT AREA: 9840 SQ. FT.  
 BUILDING: 7000 SQ. FT. (NO CHANGE)  
 SCOPE OF WORK: NEW PARAPETS AND NEW WALKWAYS