


STATISTICS						
Description	Symbol	Avg	Max	Min	Max/Min	Avg/Min
SITE	+	1.5 fc	12.5 fc	0.0 fc	N / A	N / A
PROPERTY LINE @6' AFG	+	0.1 fc	0.7 fc	0.0 fc	N / A	N / A

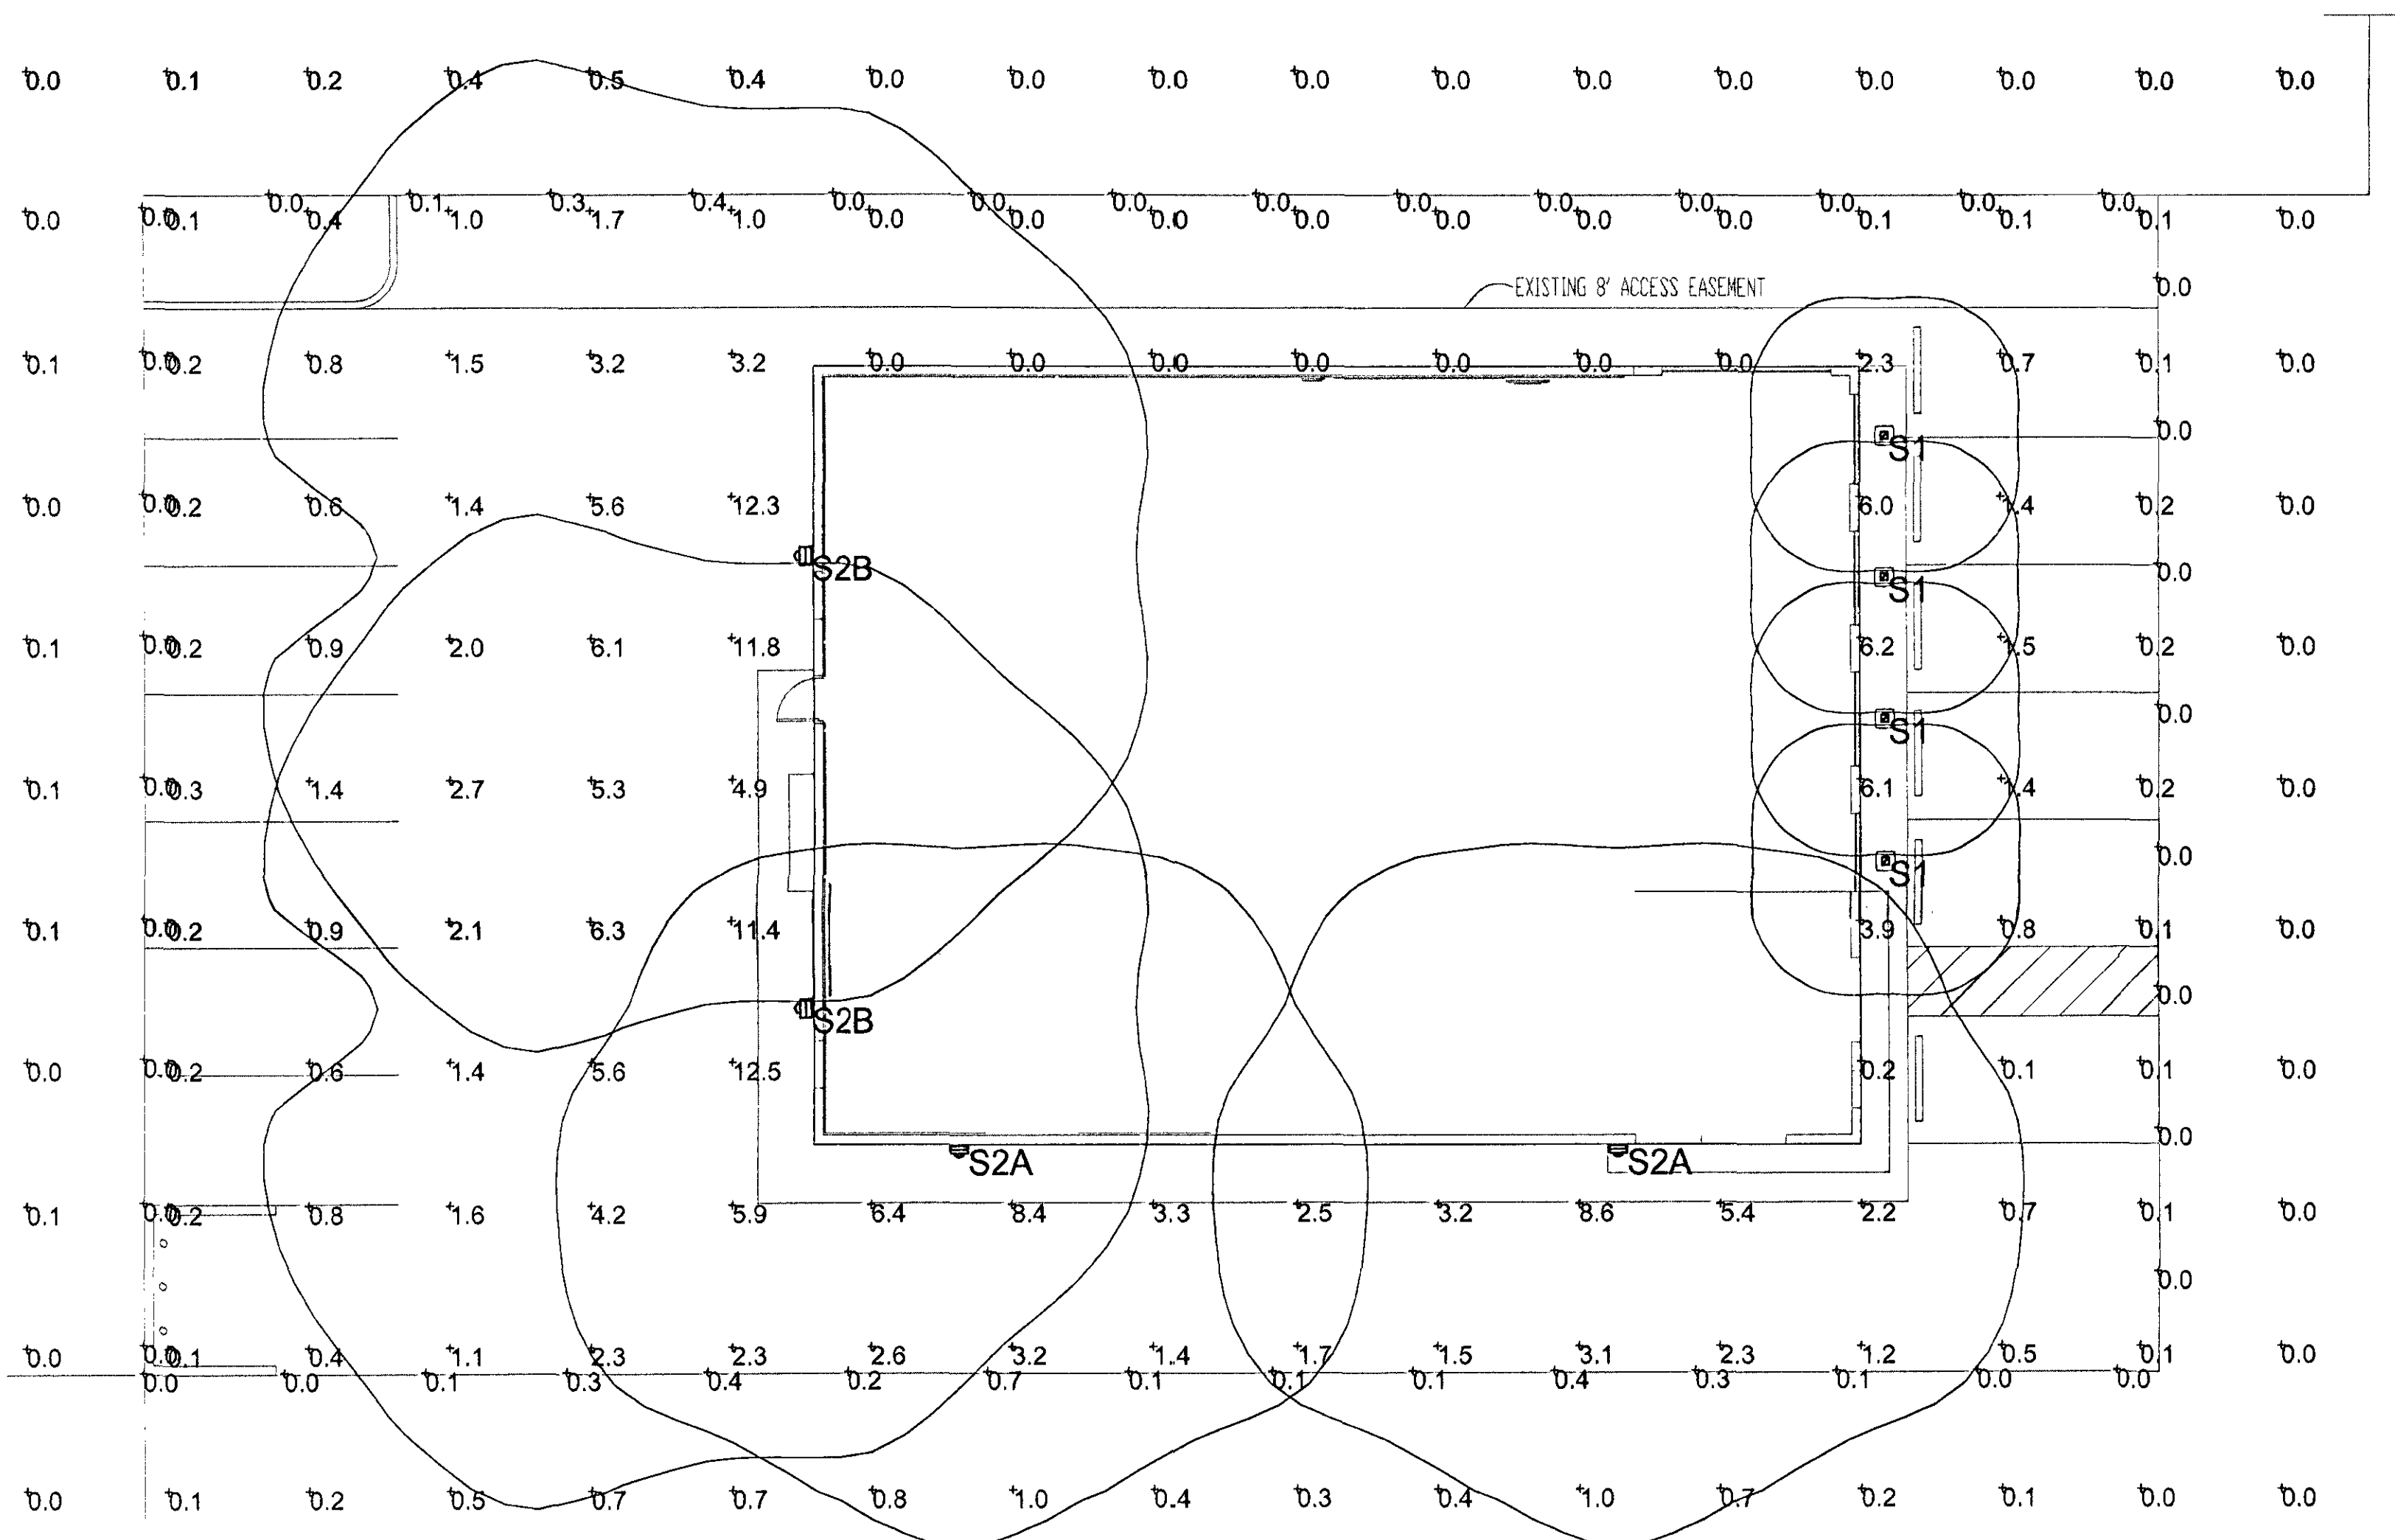

©2003 LSI Industries Inc. 8/1/03

EXAMPLE OF A TYPICAL ORDER	GBWS	3	175	MH	F	120V	BRZ	45
1. Supplied with 110V/175Watt transformer as standard. Also available with a 120V/207Watt or 240V/375W transformer. Consult factory.								
2. A polyethylene tube is required on all Light Duty models in 70, 120, 142 or 240 PL.								
3. Models with Polyethylene Shroud (PEL) PL3 accessory must be ordered.								
4. For international voltages, consult factory.								
ACCESSORY ORDERING INFORMATION								
1. Battery (B) available on standard, double and triple 240, 320 and 42 Watt units. On double and triple 240 Watt units, B1, B2 and B3 are required. On double and triple 320 and 42 Watt units, B1 and B2 are required. On double and triple 240 Watt units, B1, B2 and B3 are required. On double and triple 320 and 42 Watt units, B1 and B2 are required.								
2. Battery (B) available on standard, double and triple 240, 320 and 42 Watt units. On double and triple 240 Watt units, B1, B2 and B3 are required. On double and triple 320 and 42 Watt units, B1 and B2 are required. On double and triple 240 Watt units, B1, B2 and B3 are required. On double and triple 320 and 42 Watt units, B1 and B2 are required.								
3. Battery (B) available on standard, double and triple 240, 320 and 42 Watt units. On double and triple 240 Watt units, B1, B2 and B3 are required. On double and triple 320 and 42 Watt units, B1 and B2 are required. On double and triple 240 Watt units, B1, B2 and B3 are required. On double and triple 320 and 42 Watt units, B1 and B2 are required.								

8-UP-2006
3-30-06