



Recessed Step Light

37G

Two 25W A-19 Incandescent Lamps
Non-IC Rated
120V

DATE _____ TYPE _____

FIRM NAME _____

PROJECT _____

LifeStep

For conversion to millimeters,
multiply inches by 25.4
Not to Scale

APPLICATIONS:

The 37G step light is a heavy-duty, incandescent step light for a wide variety of interior and exterior applications. Fully gasketed, the 37G luminaire is approved for wet or concrete pour applications.

HOUSING:

Diecast aluminum housing with white baked enamel finish. Ships complete with gasketed, diecast aluminum splice box attached to bottom of the housing.

FACEPLATE:

Diecast aluminum faceplates are available with a choice of louvered with a prismatic glass lense (LF) or open with a prismatic glass lense (OF). Available in black (BL), bronze (BZ), or Prescolite's exclusive Zet (Z, metallic silver) finish.

LAMP:

Two (2) 25W A-19 lamps. Lamps furnished by others.

SOCKET:


Two (2) medium base porcelain sockets with nickel plated screw shell.

INSTALLATION:


Galvanized steel mounting brackets are included.

LABELS/WEIGHT:

U.L., CSA approved for wet locations and concrete pour. Contact factory for salt spray applications. Approved for exterior/interior installations. Non-IC rated, approved for through wiring. Consult factory for N.Y. City approval.

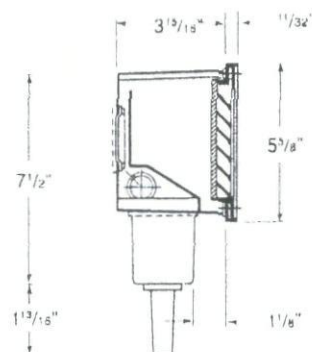

Open Faceplate (OF)

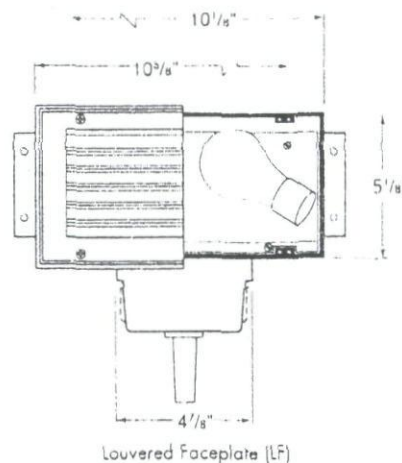

Louvered Faceplate (LF)

CATALOG NUMBER:

EXAMPLE: 37GBL-LF-TPS

HOUSING

- ☐ **37G**
Two 25W A-19
Incandescent

FINISH

- ☐ **BL**
Black
☐ **BZ**
Bronze
☐ **Z**
Zet, metallic
silver

FACEPLATE

- ☐ **LF**
Diecast aluminum
louwered faceplate
with prismatic lense
☐ **OF**
Diecast aluminum
open faceplate with
prismatic lense

ACCESSORIES

- ☐ **TPS**
Tamper proof screws

79-DR-2006

8/16/06

 **prescolite**
An Affiliate of Hubbell Lighting, Inc.

In a continuing effort to offer the best product possible we reserve the right to change, without notice, specifications or materials that in our opinion will not alter the function of the product
Web: www.prescolite.com • Tech Support: (888) 777-4832



LS-006

PHOTOMETRIC DATA

LiteStep™
Step Light - 37G

LAMP DATA

Rated Watts	25W
Rated Lumens	375
Efficacy (LPW)	15
Rated Life (hours)	1000
Base	Medium

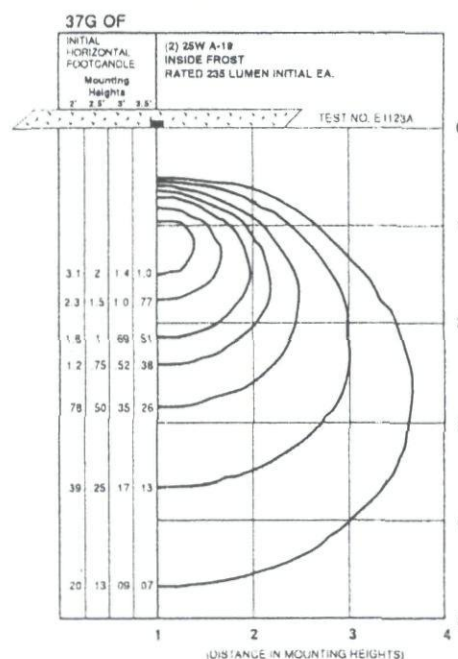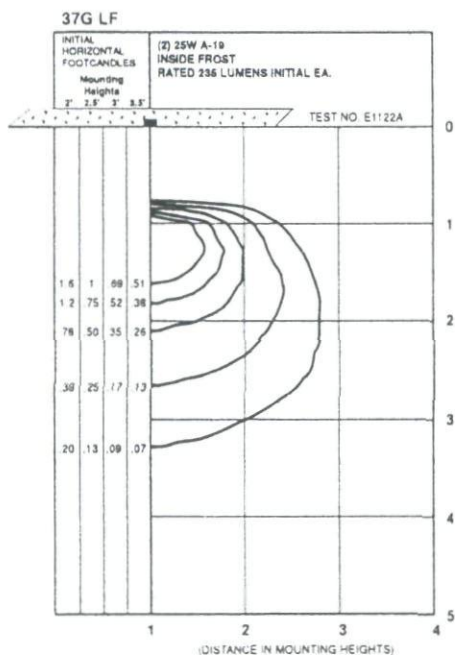

NOTES

Refer to www.prescolite.com for additional photometric tests (IES Files)

79-DR-2006
8/16/06



Web: www.prescolite.com • Tech Support: (888) 777-4832
101 Corporate Drive, Suite L • Spartanburg, SC 29303 U.S.A. • Phone (864) 599-6000
Prescolite is an affiliate of Hubbell Lighting, Inc., with representatives' offices throughout North America.
Copyright ©2005 Prescolite. All Rights Reserved • Specifications subject to change without notice • Printed in U.S.A. • LS-006 • 03/03

