




AA-9

9" ANGLE REFLECTOR 150W Max. Incandescent

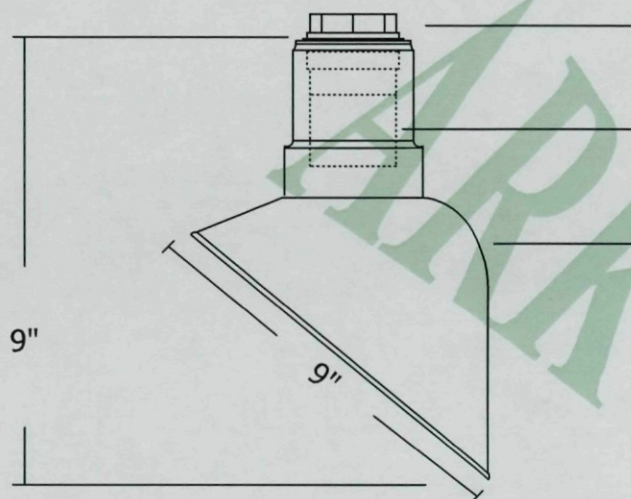

COVER NUT. Die cast aluminum with 1/2" N.P.T. or 3/4" N.P.T. accepts conduit pipe or cord strain relief.

SOCKET. Two-piece heavy duty ceramic medium base socket.

SHADE. Heavy gauge cold rolled steel zinc anodized and coated with genuine powder or electro plating. Galvanized finish is hot zinc dip. (Also available in solid copper)

ACCESSORIES AND OTHER OPTIONS

- Wireguard, globe & guard
- 26W & 32W Fluorescent 120V (ballast mounted inside the neck, globe option is required for outdoor use)
- 35 to 100W High pressure sodium (remote ballast, globe option is required for outdoor use)
- 50 to 100W Metal halide (remote ballast, globe option is required or use MP Rated lamp for open fixtures)

FINISHES

0=white, 1=black, 2=blue, 3=green, 4=dark bronze, 5=yellow, 6=red, 8=galvanized, 12=satin aluminum & 15=painted copper

ETL LISTED FOR WET LOCATION



2010 S. Westgate Avenue, Los Angeles, CA 90025 Tel: 310-473-4736 Fax: 310-473-7955

Website: www.arklighting.com Email: info@arklighting.com


85-DR-2010

1st: 7/30/2010



AGB-101

23" L GOOSENECK

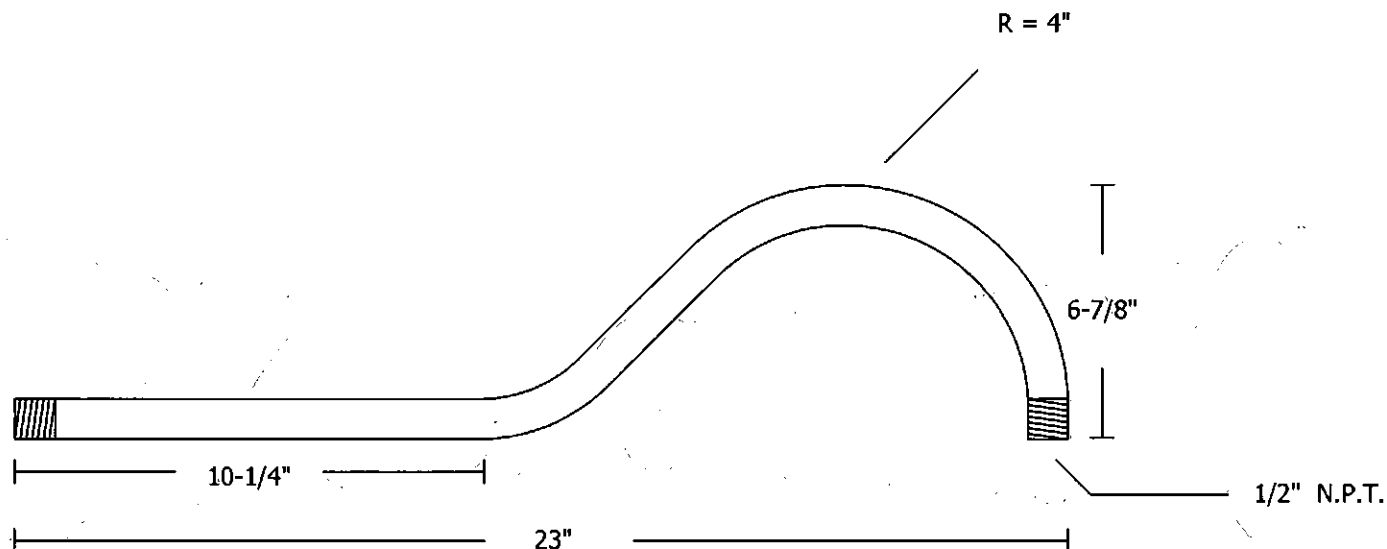

MATERIAL: Rigid Pipe 1/2" diameter (3/4" diameter available call factory)
FINISH: 0=white, 1=black, 2=blue, 3=green, 4=dark bronze, 5=yellow, 6=red, 8=galvanized (standard), 12= satin nickel & 15=copper paint
{custom color available call factory}
OPTIONS: Custom length available [shortest 18" overall length]


GOOSENECK COMES WITH COVER PLATE FITS 4" BELL BOX (by others)





AA-9

9" ANGLE REFLECTOR 150W Max. Incandescent

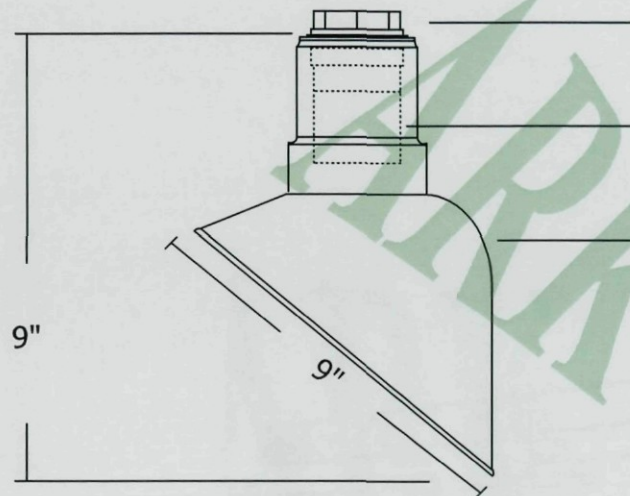

COVER NUT. Die cast aluminum with 1/2" N.P.T. or 3/4" N.P.T. accepts conduit pipe or cord strain relief.

SOCKET. Two-piece heavy duty ceramic medium base socket.

SHADE. Heavy gauge cold rolled steel zinc anodized and coated with genuine powder or electro plating. Galvanized finish is hot zinc dip. (Also available in solid copper)

ACCESSORIES AND OTHER OPTIONS

- Wireguard, globe & guard
- 26W & 32W Fluorescent 120V (ballast mounted inside the neck, globe option is required for outdoor use)
- 35 to 100W High pressure sodium (remote ballast, globe option is required for outdoor use)
- 50 to 100W Metal halide (remote ballast, globe option is required or use MP Rated lamp for open fixtures)

FINISHES

0=white, 1=black, 2=blue, 3=green, 4=dark bronze, 5=yellow, 6=red, 8=galvanized, 12=satin aluminum & 15=painted copper

ETL LISTED FOR WET LOCATION



2010 S. Westgate Avenue, Los Angeles, CA 90025 Tel: 310-473-4736 Fax: 310-473-7955

Website: www.arklighting.com Email: info@arklighting.com

85-DR-2010

1st: 7/30/2010