



2 WEST ELEVATION - SOUTH  
SCALE: 3/32" = 1'-0"

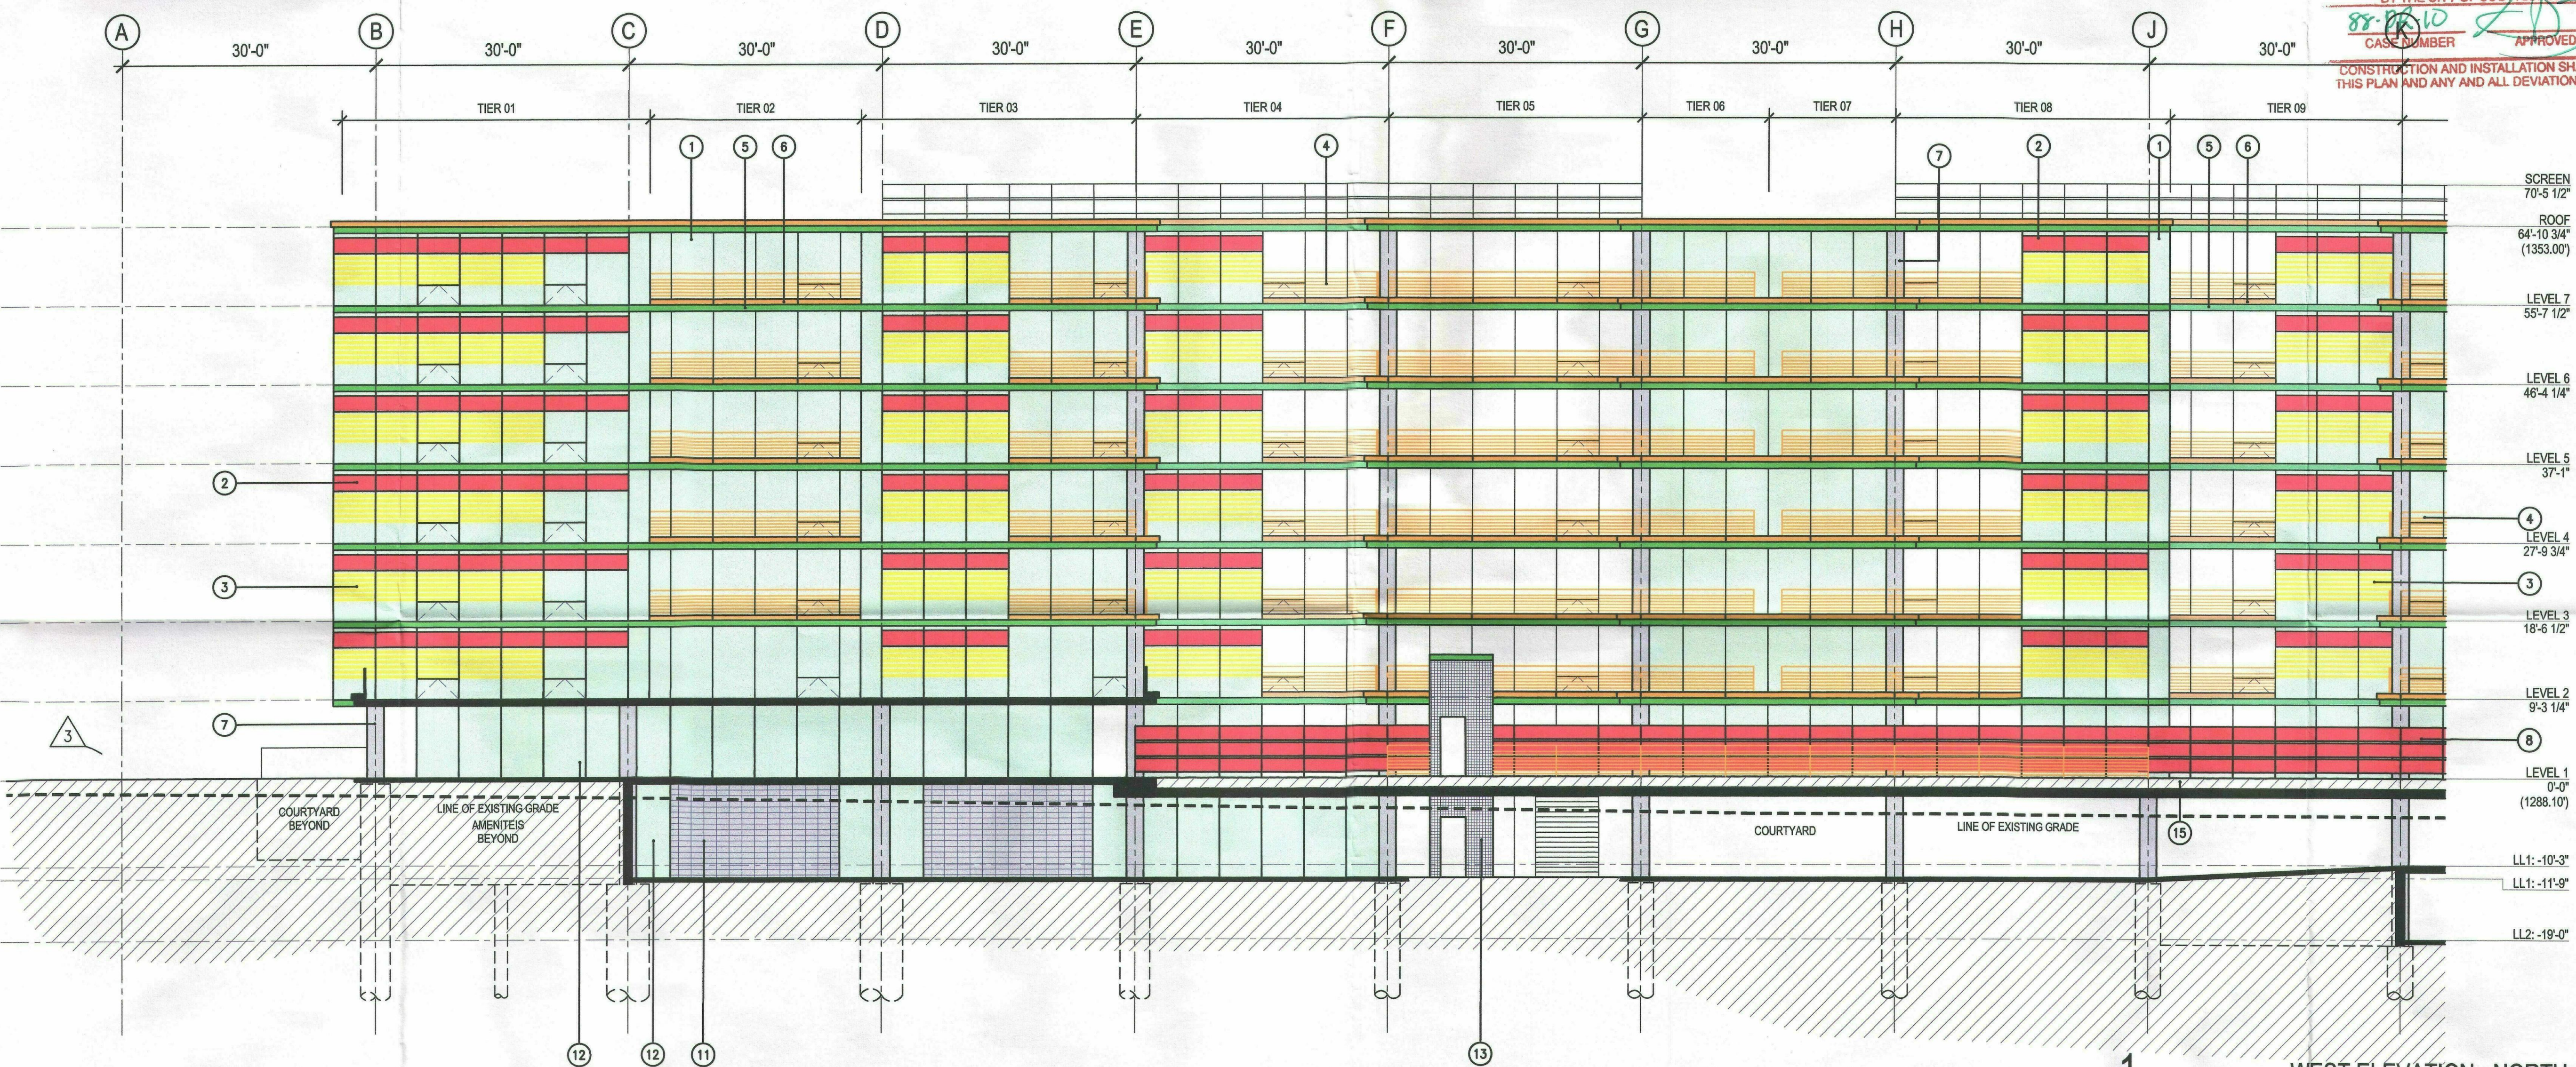

1 WEST ELEVATION - NORTH  
SCALE: 3/32" = 1'-0"

GENERAL NOTES:

- 1 WINDOW SYSTEM - ALUMINUM FRAME POWDER COATED TO MATCH CLEAR ANODIZED FINISH W/ VIRACON, VRE 2-59 OR EQUAL INSULATING GLASS
- 2 STONE PANEL - "SEDONA RED"
- 3 POWDER COATED ALUM SUNSHADES COLOR TO MATCH "SW6678"
- 4 UNPAINTED STEEL GUARDRAIL
- 5 PAINTED CONCRETE SLAB EDGE - COLOR TO MATCH "SW766"
- 6 UNPAINTED STEEL PLANTER
- 7 NATURAL CONCRETE COLUMN/WALL
- 8 STONE PANEL SCREEN WALL - "SEDONA RED"
- 9 EXTERIOR STEEL STAIR
- 10 POWDER COATED MECH LOUVER
- 11 NATURAL GRAY GROUND FACE MASONRY
- 12 BUT-GLAZED CLEAR GLASS WINDOW SYSTEM
- 13 UNPAINTED STEEL MESH ENCLOSURE
- 14 UNPAINTED STEEL ROOF FASCIA
- 15 BUILDING DESIGN INCORPORATES A TOTAL BUILDING PERFORMANCE ANALYSIS AS DEFINED BY THE IECC, SECTION 506. IN ACCORDANCE WITH THIS ANALYSIS, NO INSULATION IS REQUIRED AT THE LEVEL 1 SLAB ASSEMBLY.

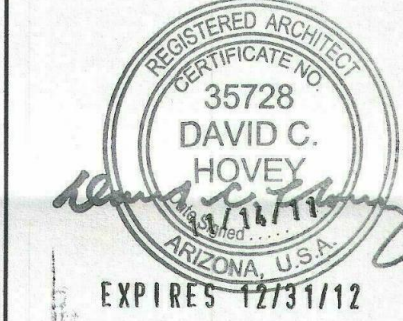

NO.	DATE	DESCRIPTION	BY
11.09.11		PROGRESS PRINT	
10.21.11		REVISED BUILDING PERMIT	
10.10.11		PROGRESS PRINT	
10.05.11		REVISED PERMIT UPDATE	
09.15.11		REVISED PERMIT	
08.18.11		BUILDING PERMIT	
08.05.11		REVISED FNDT PERMIT	
06.10.11		EXCAVATION & SITE UTILITIES	
06.02.11		PROGRESS PRINT	
05.25.11		REVISED BID PACKAGE #2	
05.16.11		BID PACKAGE #2	
04.12.11		REVISED BID PACKAGE #1	
03.17.11		BID PACKAGE #1	

**OPTIMA SONORAN VILLAGE**  
6895 EAST CAMELBACK ROAD  
SCOTTSDALE, ARIZONA  
OWNER: OPTIMA SONORAN VILLAGE LLC

DAVID HOVEY AND ASSOCIATES ARCHITECT, INC.  
7147 E RANCO VISTA DR, SUITE 104, SCOTTSDALE, AZ 85251  
TEL: (480) 874-9900 FAX: (480) 874-9910

THE OWNER, ARCHITECT, AND ENGINEER EXPRESSLY DISCLAIM ANY RESPONSIBILITY ARISING FROM ANY UNAUTHORIZED USE OF THESE PLANS, DRAWINGS, AND NOTES. ANY AUTHORIZATION MUST BE IN WRITING.


THIS DRAWING COPY MAY HAVE BEEN REPRODUCED AT A SIZE DIFFERENT THAN ORIGINALLY DRAWN. THE OWNER, ARCHITECT, AND ENGINEER ASSUME NO RESPONSIBILITY FOR THE USE OF INCORRECT SCALE.

NOTICE OF EXTENDED CERTIFICATION AND APPROVAL PERIOD PROVISION:  
THIS CONTRACT ALLOWS THE OWNER TO CERTIFY AND APPROVE BILLINGS AND ESTIMATES FOR PROGRESS PAYMENTS WITHIN TWENTY-FIVE (25) WORKING DAYS AFTER THE LAST DAY OF THE MONTH IN WHICH THE BILLINGS AND ESTIMATES ARE RECEIVED FROM THE CONTRACTOR. FOR RELEASE OF RETENTION WITHIN TWENTY-FIVE (25) WORKING DAYS AFTER THE LAST DAY OF THE MONTH IN WHICH THE BILLINGS AND ESTIMATES ARE RECEIVED FROM THE CONTRACTOR, AND FOR FINAL PAYMENT WITHIN TWENTY-FIVE (25) WORKING DAYS AFTER THE LAST DAY OF THE MONTH IN WHICH THE BILLINGS AND ESTIMATES ARE RECEIVED FROM THE CONTRACTOR.


NOTICE OF ALTERNATE ARRANGEMENTS FOR RELEASE OF RETENTION AND FINAL PAYMENT  
THIS CONTRACT ALLOWS THE OWNER TO MAKE ALTERNATE ARRANGEMENTS FOR THE RELEASE OF RETENTION AND MAKING OF FINAL PAYMENT. SUCH ALTERNATE ARRANGEMENTS ARE AS FOLLOWS: RETAINAGE TO BE TEN PERCENT (10%) UNTIL SUBSTANTIAL COMPLETION. AFTER SUBSTANTIAL COMPLETION OWNER SHALL, AFTER APPROVAL AND CERTIFICATION BY OWNER OF A BILLING AND ESTIMATE RECEIVED FROM THE CONTRACTOR, REDUCE RETENTION TO FIVE PERCENT (5%) LESS ANY WITHHOLDINGS THEREFROM. PAYMENT OF THE PAYMENT, REDUCTION OF RETENTION AS SET FORTH IN THE PRECEDING SENTENCE SHALL BE MADE SEVEN (7) DAYS AFTER THE BILLING AND ESTIMATE IS CERTIFIED AND APPROVED. FINAL PAYMENT AND FULL RELEASE OF RETENTION SHALL BE MADE SEVEN (7) DAYS FROM THE END OF THE WARRANTY PERIOD AND AFTER APPROVAL AND CERTIFICATION BY THE OWNER OF A BILLING AND ESTIMATE RECEIVED FROM THE CONTRACTOR SUBJECT TO ANY PERMITTED WITHHOLDINGS.

WEST ELEVATION  
A402  
SCALE: 3/32" = 1'-0"



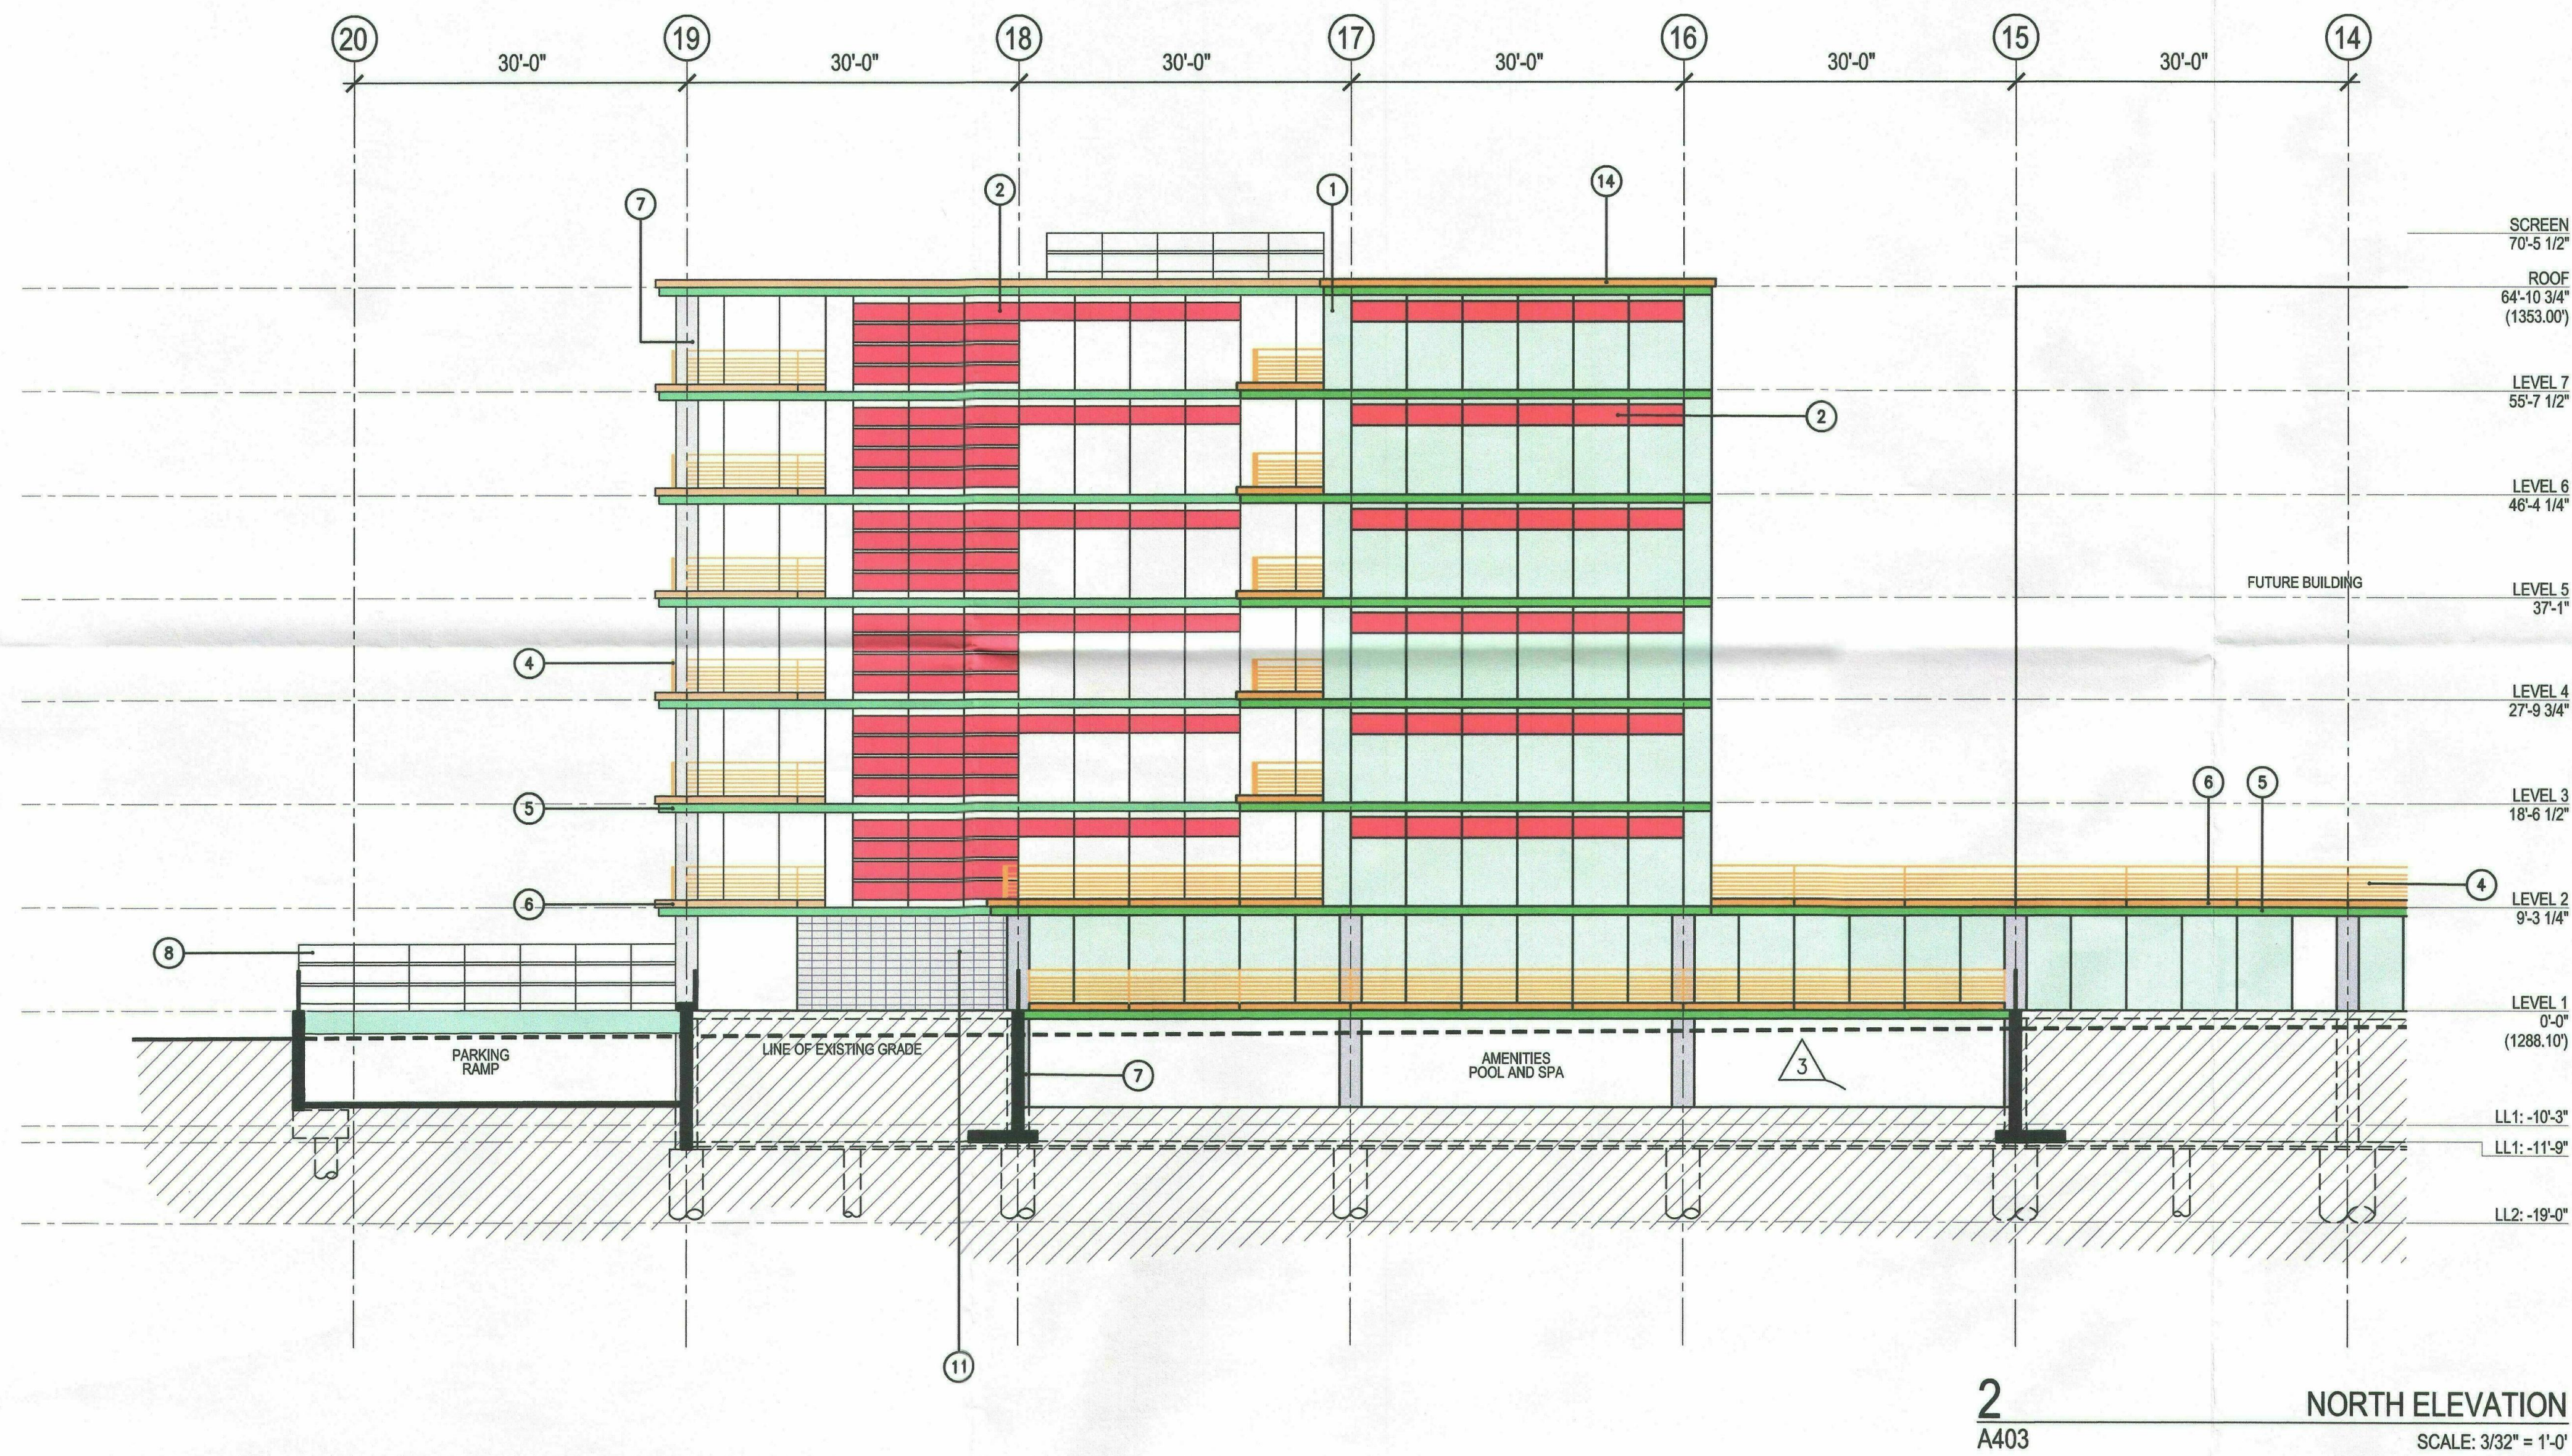


ARCHITECTURAL ELEVATIONS  
**APPROVED**  
 BY THE CITY OF SCOTTSDALE PLANNING DEPARTMENT  
 CASE NUMBER 88-DR-10 DATE 12-1-11  
 CONSTRUCTION AND INSTALLATION SHALL BE IN ACCORDANCE WITH THIS PLAN AND ANY AND ALL DEVIATIONS WILL REQUIRE REAPPROVAL

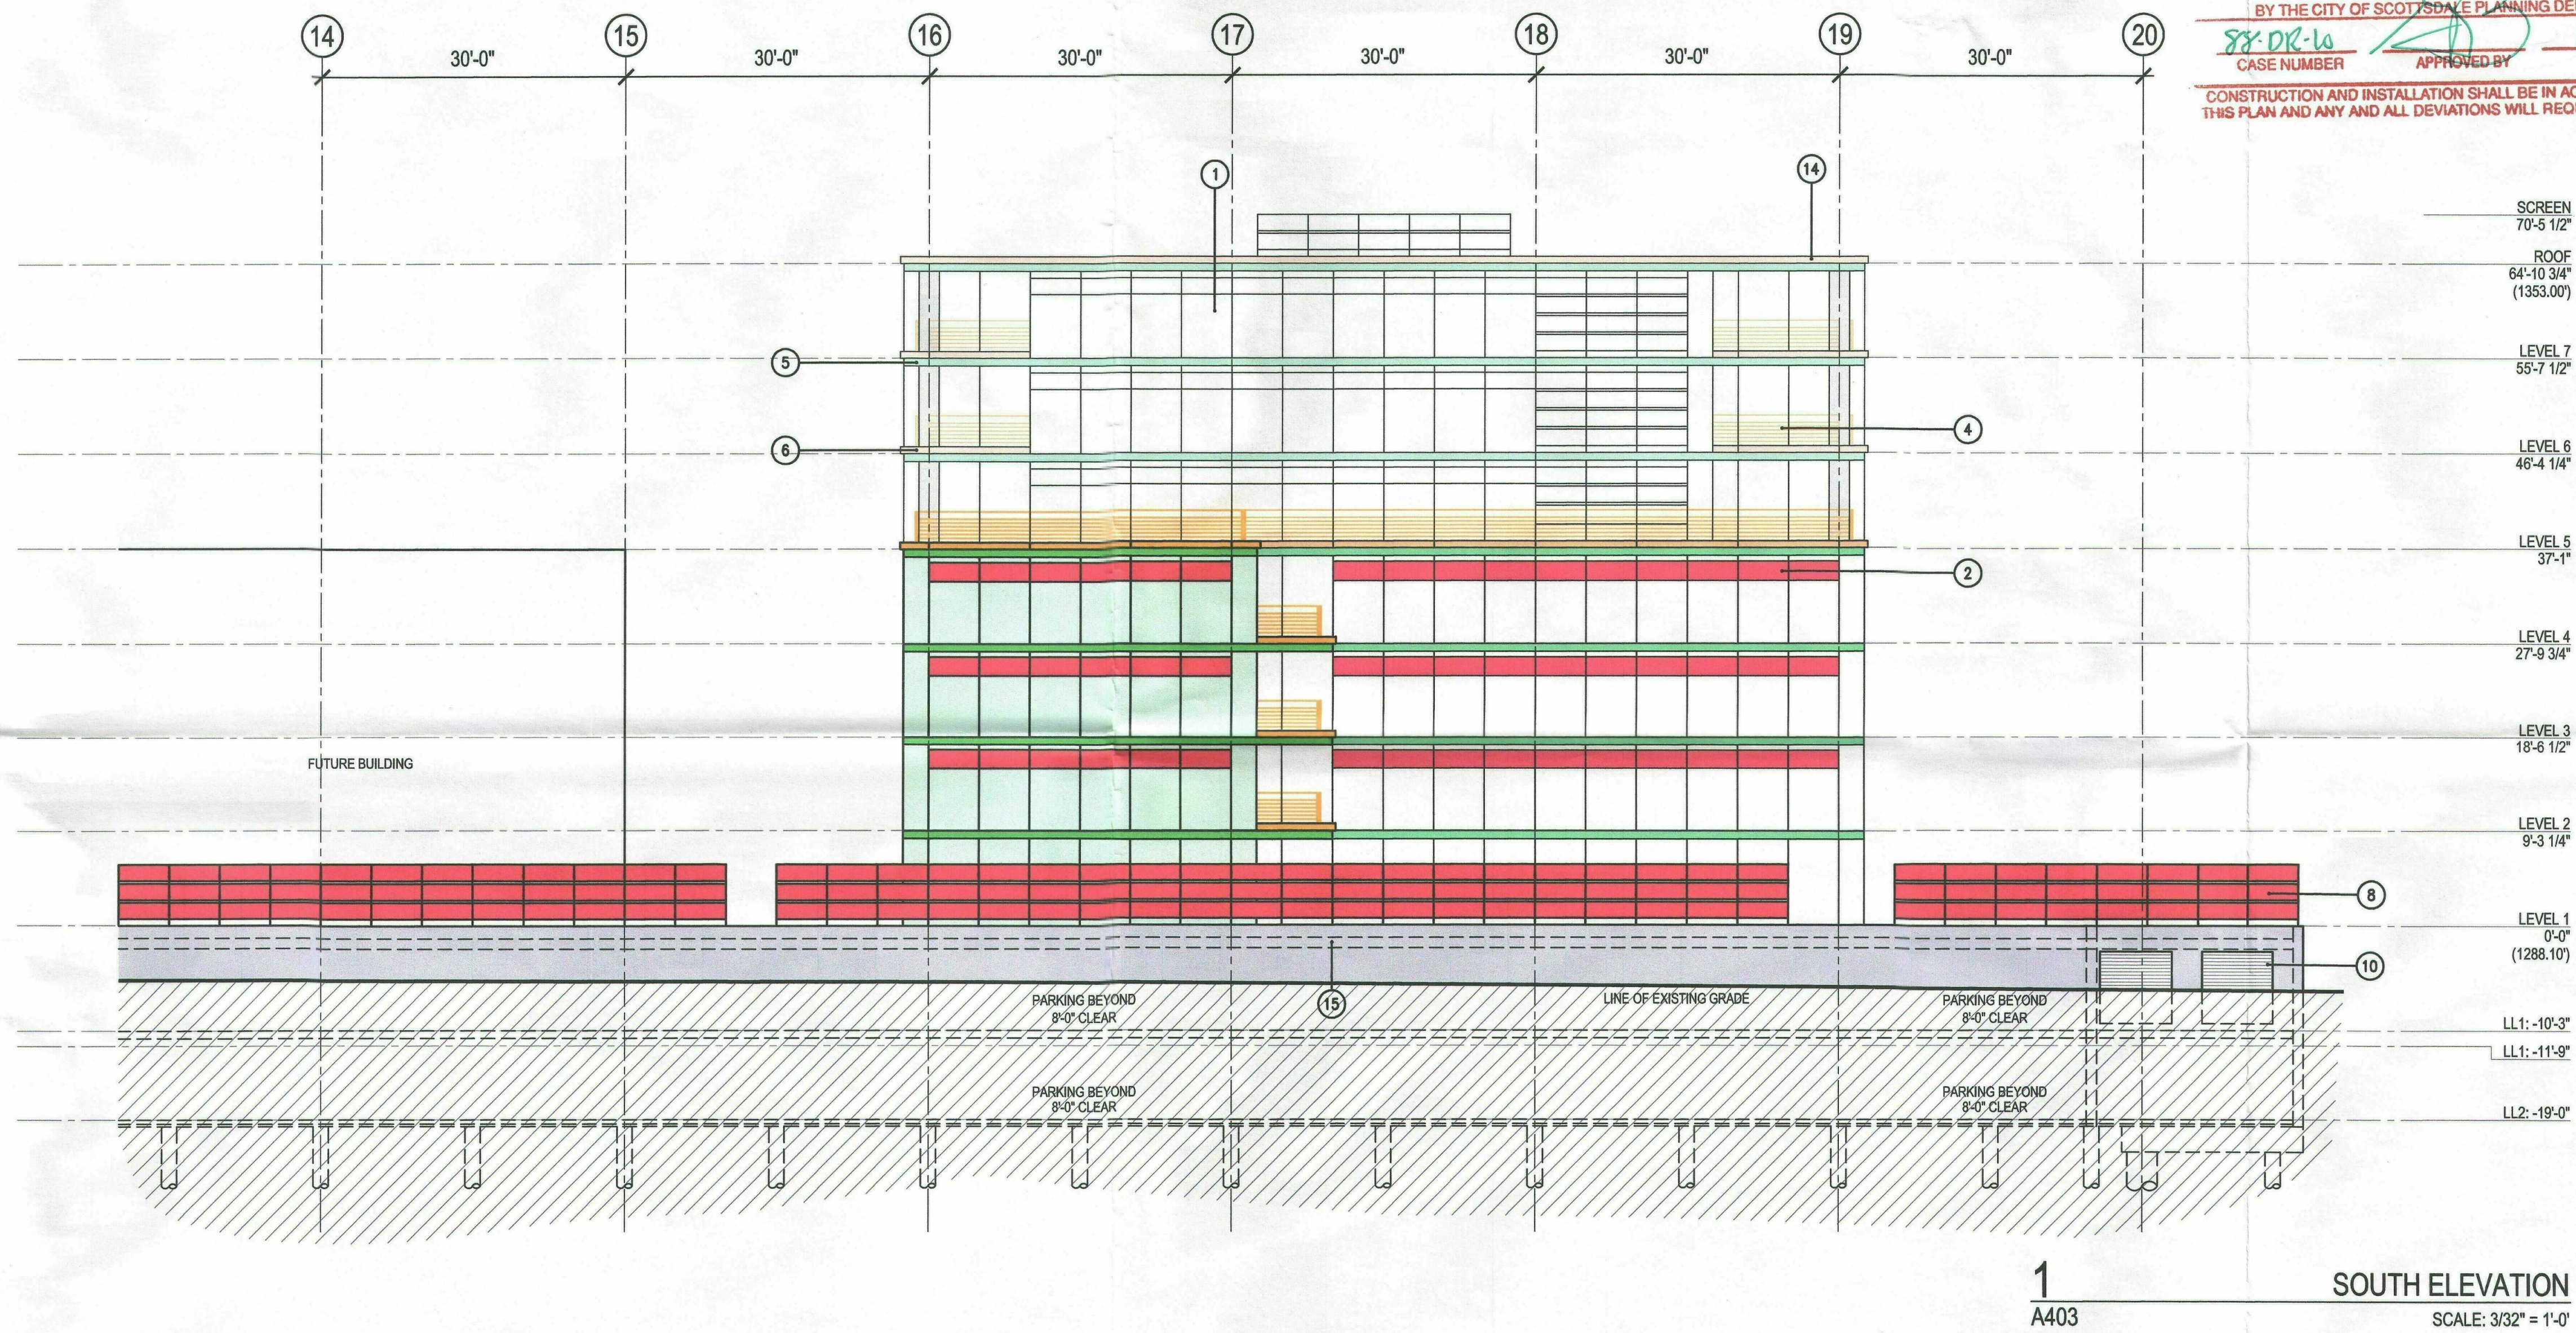

# GENERAL NOTES:

- 1 WINDOW SYSTEM - ALUMINUM FRAME POWDER COATED TO MATCH CLEAR ANODIZED FINISH W/ VIRACON, VRE 2-59 OR EQUAL INSULATING GLASS
- 2 STONE PANEL - "SEDONA RED"
- 3 POWDER COATED ALUM SUNSHADES COLOR TO MATCH "SW6678"
- 4 UNPAINTED STEEL GUARDRAIL
- 5 PAINTED CONCRETE SLAB EDGE - COLOR TO MATCH "SW766"
- 6 UNPAINTED STEEL PLANTER
- 7 NATURAL CONCRETE COLUMN/WALL
- 8 STONE PANEL SCREEN WALL - "SEDONA RED"
- 9 EXTERIOR STEEL STAIR
- 10 POWDER COATED MECH LOUVER
- 11 NATURAL GRAY GROUND FACE MASONRY
- 12 BUT-GLAZED CLEAR GLASS WINDOW SYSTEM
- 13 UNPAINTED STEEL MESH ENCLOSURE
- 14 UNPAINTED STEEL ROOF FASCIA
- 15 BUILDING DESIGN INCORPORATES A TOTAL BUILDING PERFORMANCE ANALYSIS AS DEFINED BY THE IECC, SECTION 506. IN ACCORDANCE WITH THIS ANALYSIS, NO INSULATION IS REQUIRED AT THE LEVEL 1 SLAB ASSEMBLY.

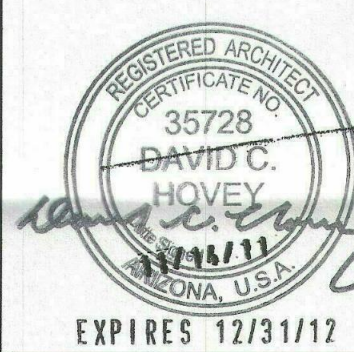

NO.	DATE	DESCRIPTION	BY
11.09.11		PROGRESS PRINT	
10.21.11		REVISED BUILDING PERMIT	
10.10.11		PROGRESS PRINT	
10.05.11		REVISED PERMIT UPDATE	
09.15.11		REVISED PERMIT	
08.18.11		BUILDING PERMIT	
08.05.11		REVISED FNDTN PERMIT	
06.10.11		EXCAVATION & SITE UTILITIES	
06.02.11		PROGRESS PRINT	
05.25.11		REVISED BID PACKAGE #2	
05.16.11		BID PACKAGE #2	
04.12.11		REVISED BID PACKAGE #1	
03.17.11		BID PACKAGE #1	

**OPTIMA SONORAN VILLAGE**  
 6895 EAST CAMELBACK ROAD  
 SCOTTSDALE, ARIZONA  
 OWNER: OPTIMA SONORAN VILLAGE LLC

DAVID HOVEY AND ASSOCIATES ARCHITECT, INC.  
 7147 E RANCO VISTA DR, SUITE 104, SCOTTSDALE, AZ 85251  
 TEL: (480) 874-9900 FAX: (480) 874-9910

THE OWNER, ARCHITECT, AND ENGINEER EXPRESSLY DISCLAIM ANY RESPONSIBILITY ARISING FROM ANY UNAUTHORIZED USE OF THESE PLANS, DRAWINGS, AND NOTES. ANY AUTHORIZATION MUST BE IN WRITING.

THIS DRAWING COPY MAY HAVE BEEN REPRODUCED AT A SIZE DIFFERENT THAN ORIGINALLY DRAWN. THE OWNER, ARCHITECT, AND ENGINEER ASSUME NO RESPONSIBILITY FOR THE USE OF INCORRECT SCALE.

NOTICE OF EXTENDED CERTIFICATION AND APPROVAL PERIOD PROVISION:  
 THIS CONTRACT ALLOWS THE OWNER TO CERTIFY AND APPROVE BILLINGS AND ESTIMATES FOR PROGRESS PAYMENTS WITHIN TWENTY-FIVE (25) WORKING DAYS AFTER THE LAST DAY OF THE MONTH IN WHICH THE BILLINGS AND ESTIMATES ARE RECEIVED FROM THE CONTRACTOR. FOR RELEASE OF RETENTION WITHIN TWENTY-FIVE (25) WORKING DAYS AFTER THE LAST DAY OF THE MONTH IN WHICH THE BILLINGS AND ESTIMATES ARE RECEIVED FROM THE CONTRACTOR, AND FOR FINAL PAYMENT WITHIN TWENTY-FIVE (25) WORKING DAYS AFTER THE LAST DAY OF THE MONTH IN WHICH THE BILLINGS AND ESTIMATES ARE RECEIVED FROM THE CONTRACTOR.

NOTICE OF ALTERNATE ARRANGEMENTS FOR RELEASE OF RETENTION AND FINAL PAYMENT:  
 THIS CONTRACT ALLOWS THE OWNER TO MAKE ALTERNATE ARRANGEMENTS FOR THE RELEASE OF RETENTION AND MAKING OF FINAL PAYMENT. SUCH ALTERNATE ARRANGEMENTS ARE AS FOLLOWS: RETAINAGE TO BE TEN PERCENT (10%) UNTIL SUBSTANTIAL COMPLETION. AFTER SUBSTANTIAL COMPLETION OWNER SHALL APPROVE AND CERTIFICATION BY OWNER OF A BILLING AND ESTIMATE RECEIVED FROM THE CONTRACTOR, REDUCE RETENTION TO FIVE PERCENT (5%) LESS ANY WITHHOLDINGS THEREFROM. PAYMENT OF THE PARTIAL REDUCTION OF RETENTION AS SET FORTH IN THE PRECEDING SENTENCE SHALL BE MADE SEVEN (7) DAYS AFTER THE BILLING AND ESTIMATE IS CERTIFIED AND APPROVED. FINAL PAYMENT AND FULL RELEASE OF RETENTION SHALL BE MADE SEVEN (7) DAYS FROM THE END OF THE WARRANTY PERIOD AND AFTER APPROVAL AND CERTIFICATION BY THE OWNER OF A BILLING AND ESTIMATE RECEIVED FROM THE CONTRACTOR SUBJECT TO ANY PERMITTED WITHHOLDINGS.

NORTH AND SOUTH ELEVATIONS  
 SCALE: 3/32" = 1'-0"

A403

1/28/11 11:15 AM  
 PLAN CHECK #: 478-10  
 NATIVE PLANT #: 2659-11  
 DR #: 88-DRB-2010  
 QP #: 1-ZN-2010  
 1-GP-2010