

Exterior Building Color & Material Samples

Color Drawdowns

Archaeological Resources

Airport Vicinity Development Checklist

Parking Study

Trip Generation Comparison



Parking Master Plan

3" INGROUND 120V

5032

WAC

LANDSCAPE LIGHTING



Fixture Type:

Catalog Number:

Project: _____

Location: _____

PRODUCT DESCRIPTION

Landscape Wall Wash luminaire

FEATURES

- Adjustable beam angle
- Integral dimmer
- IP67 rated, protected from temporary immersion under water
- Drive over up to 4500lbs
- Solid diecast brass or corrosion resistant aluminum
- Available concrete pour kit
- 6' lead wire and wire nuts included
- Maintains constant lumen output against voltage drop
- UL 1598 listed
- Not suitable to use with external dimmers

SPECIFICATIONS

Input: 110V - 120VAC
Power: 3W to 11.5W
Brightness: 65 lm to 515 lm
Beam Angle: 15° to 60°
CRI: 85
Rated Life: 45,000 hours

ORDERING NUMBER

		Color Temp	Finish
5032	3" Inground 120V	30 3000K	BZ Bronze on Aluminum BBR Bronze on Brass

5032-30 _____

Example: **5032-30BBR**

wacighting.com
 Phone (800) 526.2588
 Fax (800) 526.2585

Headquarters/Eastern Distribution Center
 44 Harbor Park Drive
 Port Washington, NY 11050

Central Distribution Center
 1600 Distribution Ct
 Lithia Springs, GA 30122

Western Distribution Center
 1750 Archibald Avenue
 Ontario, CA 91760

WAC Lighting retains the right to modify the design of our products at any time as part of the company's continuous improvement process. © 2016

15-DR-2017
3/30/2017

3" INGROUND 120V

5032

WAC

LANDSCAPE LIGHTING

Rock Guard

Protects the fixture face



5030-GRD-BZ
Bronze on Aluminum

5030-GRD-BBR
Bronze on Brass

Optics

Enhances saturation of florals and foliage



LENS-25-AMB
Amber

LENS-25-RED
Red

LENS-25-FR
Frosted

LENS-25-GRN
Green


LENS-25-BLU
Blue

LENS-25-HCL
Honeycomb Louver
Reduces glare

Concrete Pour Kit

For installation in concrete
Five 1/2" NPT threaded holes, PC

5030-PIP-PVC
Shown with temporary dense foam cap

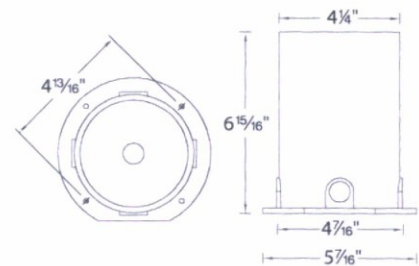

wacighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760

WAC Lighting retains the right to modify the design of our products at any time as part of the company's continuous improvement



15-DR-2017
3/30/2017

3" INGROUND 120V


5032

WAC

LANDSCAPE LIGHTING

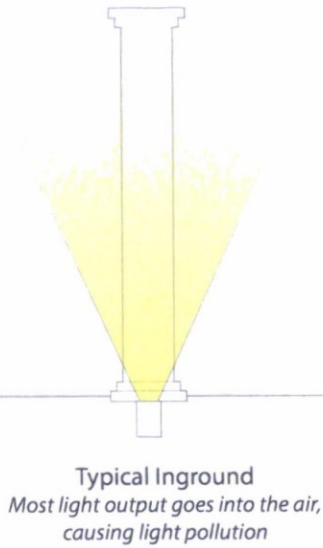

Adjust Beam Angles
*Presets at
15°, 30°, 45°, 60°*

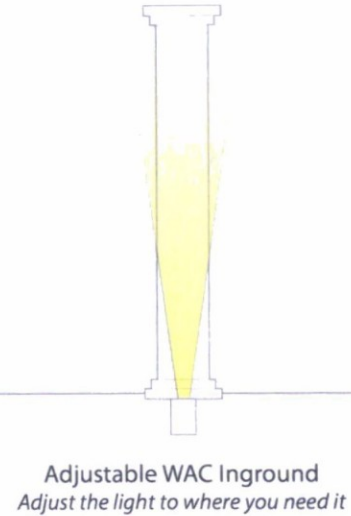

Control Brightness
*Adjustable from 65lm to 515lm
Presets Comparable to
10W, 25W, 35W, 50W, 75W Halogen source*



wacighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122



Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760

WAC Lighting retains the right to modify the design of our products at any time as part of the company's continuous improvement

15-DR-2017
3/30/2017

TO EXISTING
STREET LIGHTING
CIRCUIT THROUGH
PHOTOCELL TIME
CLOCK

NEW 150W
TRANSFORMER
120V/12V
FIELD VERIFY VOLTAGE
PRIOR TO ORDERING
FIXTURES AND
TRANSFORMER

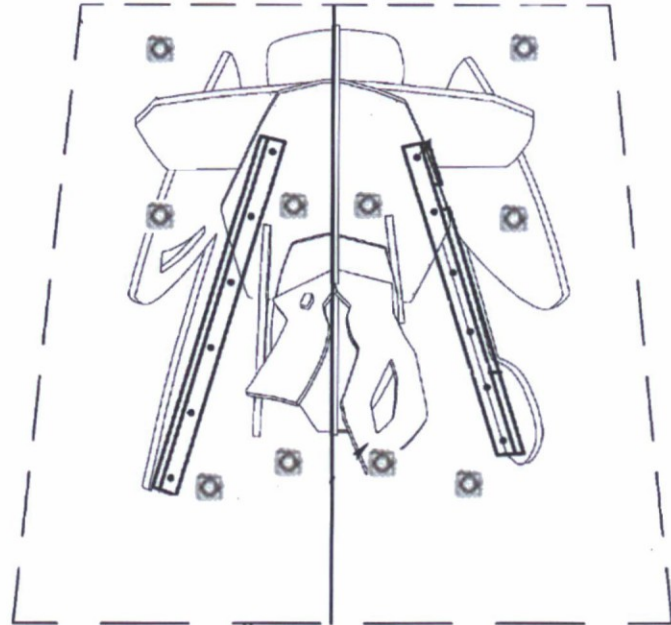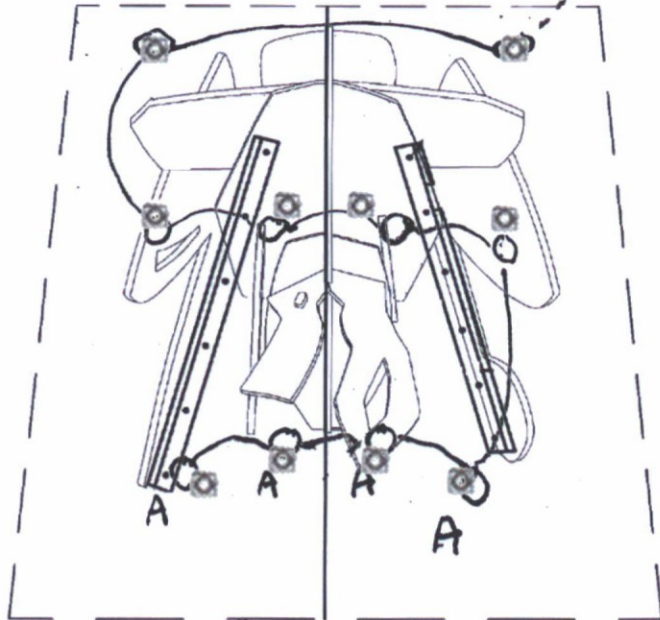

TYPE 'A' - WAC MODEL # 5031-30-BZ

- A. CONTRACTOR TO VERIFY VOLTAGE AND OVERCURRENT DEVICE REQUIREMENTS.
- B. NOTE THAT NO ADDITIONAL DOWNLIGHTING OR LIGHT TRESPASS WILL BE GENERATED BY THE LIGHTING FIXTURES. PHOTOMETRIC STUDY NOT REQUIRED.

Flush-to-grade
uplights aimed
at metal planes
of structure