




Specifications

EPA: 0.95 ft² (0.09 m²)
Length: 26" (660 mm)
Width: 13" (330 mm)
Height: 3" (76 mm)
Weight (max): 16 lbs (7.3 kg)

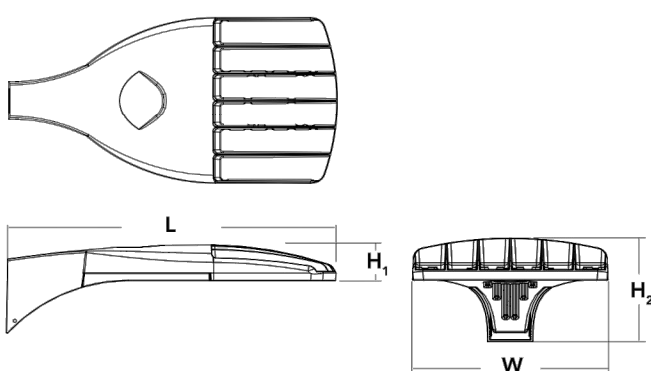

D-Series Size 0 LED Area Luminaire



Buy American

Catalog Number
Notes
Type
SA


Introduction

The modern styling of the D-Series is striking yet unobtrusive - making a bold, progressive statement even as it blends seamlessly with its environment. The D-Series distills the benefits of the latest in LED technology into a high performance, high efficacy, long-life luminaire. The outstanding photometric performance results in sites with excellent uniformity, greater pole spacing and lower power density. It is ideal for replacing up to 400W metal halide with typical energy savings of 70% and expected service life of over 100,000 hours.



Specifications

Depth (D1): 7"
Depth (D2): 1.5"
Height: 9"
Width: 11.5"
Weight: 13.5 lbs (without options)

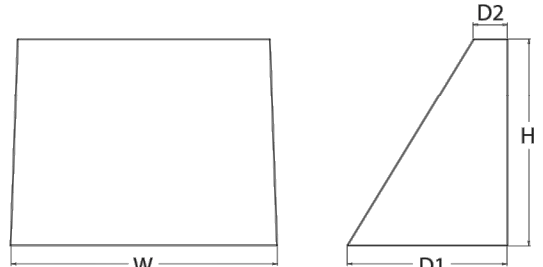

WDGE2 LED Architectural Wall Sconce Precision Refractive Optic



Buy American

Catalog Number
Notes
Type
SBE/SC

Introduction

The WDGE2 LED family is designed to meet specifier's every wall-mounted lighting need in a widely accepted shape that blends with any architecture. The clean, minimalist design comes in four sizes with lumen packages ranging from 1,200 to 25,000 lumens, providing a true site-wide solution. Embedded with nLight™ AIR wireless controls, the WDGE2 family provides additional energy savings and code compliance. WDGE2 with industry leading precision refractive optics provides great uniform distribution and optical control. When combined with multiple integrated emergency battery backup options, including an 18W cold temperature option, the WDGE2 becomes the ideal wall-mounted lighting solution for pedestrian scale applications in any environment.

WDGE LED Family Overview

Luminaire	Optics	Standard Effic. (lm/W)	Cold Effic. (lm/W)	Sensor	Approximate Lumens (1000K, 80CRI)								
					P0	P1	P2	P3	P4	P5	P6		
WDGE1 LED	Visual Comfort	4W	18W	Standard	750	1,200	2,000	—	—	—	—	—	—
WDGE2 LED	Visual Comfort	10W	18W	Standard / nLight	1,200	2,000	3,000	4,500	6,000	—	—	—	—
WDGE2 LED	Precision Refractive	10W	18W	Standard	700	1,200	2,000	3,200	4,200	—	—	—	—
WDGE3 LED	Precision Refractive	15W	18W	Standard	—	7,500	8,500	10,000	12,000	—	—	—	—
WDGE4 LED	Precision Refractive	—	—	Standard	—	12,000	16,000	18,000	20,000	22,000	25,000	—	—

Ordering Information

Series	Package	Color Temperature	LED	Distribution	Voltage	Mounting	Shipped Included	Shipped Separately
WDGE2 LED	P0 ¹	27K	2700K	7000R ²	T1S	Type I Short	SM	Surface mounting bracket
	P1 ²	30K	3000K	800R	T3M	Type II Medium	ICW	Indirect Canopy/Ceiling Washer bracket only ³
	P2 ³	40K	4000K	LW ⁴ Limited Wavelength	T4M	Type II Medium	—	—
	P3 ³	50K	5000K	AMB	T5M	Forward Throw Medium	—	—

Options

Options	Standalone Sensors/Controls	Finish
E10WH Emergency battery backup, Certified in CA Title 20 MAEDS (10W, 5% min)	PR 8i-level (100/35%) motion sensor for 8-15' mounting heights. Intended for use on switched circuits with external dusk to dawn switching.	D0BD Dark bronze
E20W Emergency battery backup, Certified in CA Title 20 MAEDS (18W, 20% min)	PRH 8i-level (100/35%) motion sensor for 15-30' mounting heights. Intended for use on switched circuits with external dusk to dawn switching.	DBL0 Black
PE ⁵ Photozell, Button Type	PRHFCV 8i-level (100/35%) motion sensor for 8-15' mounting heights with photozell pre-programmed for dusk to dawn operation.	DNAT Natural aluminum
DMC ⁶ 0-10V dimming wires pulled outside fixture (for use with an external control, ordered separately)	PRHFCV 8i-level (100/35%) motion sensor for 15-30' mounting heights with photozell pre-programmed for dusk to dawn operation.	DNWD White
BCE Bottom conduit entry for back box (PBBW). Total of 4 entry points.	Networked Sensors/Controls	DS0D Sandstone
	N2AIR2 PIR nLight™ Wireless enabled bi-level motion/ambient sensor for 8-15' mounting heights. See page 4 for full functionality.	DBD0 Textured dark bronze
	N2AIR2 PIR nLight™ Wireless enabled bi-level motion/ambient sensor for 15-30' mounting heights. See page 4 for full functionality.	DRLD Textured black
		DNATD Textured natural aluminum
		DNWD Textured white
		DS0TD Textured sandstone

Ordering Information

EXAMPLE: DSX0 LED P6 40K T3M MVOLT SPA N2AIR2 PIRHN DDBXD

Series	LEDs	Color Temperature	Distribution	Voltage	Mounting	Shipped Included
DSX0 LED	Forward optics		T1S Type I short (Automotive)	T5S Type V short ¹	MVOLT (120V-277V) ¹⁰	SPA Square pole mounting
	P1	P5	40K 4000K	T2S Type I short	T3M Type II medium ¹	XVOLT (277V-480V) ¹⁰
	P2	P6	50K 5000K	T3M Type II medium	T3W Type I wide ¹	120 ¹
	P3	P7	—	T3S Type II short	BLC Backlight control ¹	208 ¹
Rotated optics		P4 ¹	T3M Type II medium	LCCO Left corner cutoff ¹	240 ¹	SPUMBA Square pole universal mounting adapter ¹¹
		T4M Type II medium	RCCO Right corner cutoff ¹	277 ¹	347 ¹	RPUMBA Round pole universal mounting adapter ¹¹
		T5M Forward throw medium	T5VS Type V very short ¹	400 ¹	—	—

Control options	Other options	Finish (optional)
Shipped installed	Shipped installed	D0BD Dark bronze
N2AIR2 nLight™ generation 2 enabled ^{10,11}	HS House-side shield ¹²	DBL0 Black
PIRHN Network, high/low motion/ambient sensor ¹⁰	SF Single face (120, 227, 347V) ¹	DNATD Natural aluminum
PER NEMA twist-lock receptacle only (control ordered separately) ^{10,11}	DF Double face (228, 240, 480V) ¹	DNWD White
PER5 Five-pin receptacle only (control ordered separately) ^{10,11}	L90 Left rotated optics ¹	DBD0 Textured dark bronze
PER7 Seven-pin receptacle only (leads out fixture) (control ordered separately) ^{10,11}	R90 Right rotated optics ¹	DRLD Textured black
DMG 0-10V dimming extend end back of housing for external control (control ordered separately) ¹⁰	D0L Diffused drop lens ¹	DNATD Textured natural aluminum
	HA 50% ambient operation ¹	DNWD Textured white
	BAA Buy American/ Act Compliant	—
	BS Bird spikes ¹³	—
	E6S External glare shield	—

One Lithonia Way • Conyers, Georgia 30012 • Phone: 1-800-705-SERV (3787) • www.lithonia.com
 © 2011-2021 Acuity Brands Lighting, Inc. All rights reserved.



FEATURES & SPECIFICATIONS

INTENDED USE — Typical applications include corridors, hallways, conference rooms and private offices.
CONSTRUCTION — Galvanized steel mounting/plaster frame; galvanized steel junction box with bottom-hinged access covers and spring latches. Reflectors are retained by tension springs.
 Vertically adjustable mounting brackets with universal ball hangers provide 3-1/4" total adjustment. Two combinations: 1-1/4" and four 1/4" knockouts for straight-through conductors. Capacity: 8 (4 H, 4 V), No. 12 AWG conductors, rated for 90°C.
 Accommodates 1/2"-2 1/2" post spacing.
 Passive cooling thermal management for 25°C standard; high ambient (40°C) option available. Light engine and drivers are accessible from above or below ceiling.
OPTICS — LEDs are bonded to a 3-megapixel, 90-ohm minimum, 90-ohm optional.
 LED light source concealed with diffusing optical lens.
 General illumination lighting with 1.8 S/M and 55° cutoff to source and source image.
 Self-adjusted adjustable reflectors in specular, semi-specular, or matte diffuser finishes. Also available in white and black painted reflectors.
ELECTRICAL — Multi-wire (120-277V, 50/60Hz) 0-10V dimming drivers mounted on junction box, 10% to 70% minimum dimming level available.
 0-10V dimming feature requires two (2) additional low-voltage wires to be pulled.
 70% lumen maintenance at 60,000 hours.
LISTINGS — Certified to UL and Canadian safety standards. Wet location standard (covered ceiling). IP65 sealed, ENERGY STAR® certified product.
BUY AMERICAN — Product with the BAA option is assembled in the USA and meets the Buy American/ government procurement requirements under FAR, DFARS and DOT. Please refer to www.acuitybrands.com/usa-american for additional information.
WARRANTY — 5-year limited warranty. Complete warranty terms located at: www.acuitybrands.com/support/warranty/terms-and-conditions.
 Note: Actual performance may differ as a result of end-user environment and application.
 All values are design or typical values, measured under laboratory conditions at 25 °C.
 Specifications subject to change without notice.



Buy American

ORDERING INFORMATION

Lead times will vary depending on options selected. Consult with your sales representative.

Series	Color temperature	Lumens ¹	Aperture/Trim Color	Finish	Voltage
LDN6	27	2700K	05 500 lumens	AR Clear	MVOLT Multi-volt
	30	3000K	25 2500 lumens	WR White	120 120V
	35	3500K	40 4000 lumens	BR Black	LD Matte diffuser
	40	4000K	50 5000 lumens	LS Specular	227 227V

Driver

Driver	Options	Finish
G210 0-10V driver dims to 10%	Single phase	N20 ⁹
G211 0-10V driver dims to 1%	White painted flange	J01 ¹⁰
D10 Minimum dimming 10% driver for use with J01	Black painted flange	NPS02 ¹⁰
D11 Minimum dimming 1% driver for use with J01	Emergency battery pack with integral test switch, 10W Constant Power, Not Certified in CA Title 20 MAEDS	NPS02ER ¹⁰
E210 0-10V eLED driver with smooth and flicker-free dimming performance down to 10%	Emergency battery pack with self-diagnostics, integral test switch, 10W Constant Power, Not Certified in CA Title 20 MAEDS	RR ¹⁰
E211 0-10V eLED driver with smooth and flicker-free dimming performance down to 10%	Emergency battery pack with self-diagnostics, integral test switch, 10W Constant Power with remote test switch, Certified in CA Title 20 MAEDS	N2AIR2 ¹⁰
E2AB 40-60 DALI DALI SDRIVE dimmer	nLight™ network power/playback pack with 0-10V dimming for non-eLED drivers (G210, G211, ER controls features on emergency circuit.	N2AIR2EM ¹⁰

Accessories: Order as separate catalog number.

PS105CP FMV Power Sentry battery pack, T20 compliant, field installable, low constant power	1 Not available with emergency systems.	9 Not available with CP, NPS02ER, NPS160, NPS160ER or N90 options.
EAC CSM 373 Compact interruptible emergency AC power system	2 Available with clear (AR) reflector only	10 N2AIR2, N2AIR2ER and N2AIR2EM not recommended for metal ceiling installations.
GR468 J2 Compact trim ring with 8" outside diameter ¹	3 Specify voltage for 3000m and above. 5000m with marked spacing 241, 241R, 141R. Not available with emergency battery pack option.	11 Metal ceiling depth or top access required for battery pack maintenance.


1 Overall height varies based on lumen package; refer to dimensional chart page 3.
 2 Not available with finishes.
 3 Must specify voltage for 3000m and above. 5000m with marked spacing 241, 241R, 141R. Not available with emergency battery pack option.
 4 Must specify voltage for 3000m and above. 5000m with marked spacing 241, 241R, 141R. Not available with emergency battery pack option.
 5 WFI requires an emergency hot lead and normal hot lead.
 6 Fixture height is 8" light level. Must be specified with PS02ER or NPS02ER. Only available with E210 and E211 drivers.
 7 WFI requires an emergency hot lead and normal hot lead.
 8 Fixture height is 8" light level. Must be specified with PS02ER or NPS02ER. Only available with E210 and E211 drivers.
 9 Not available with CP, NPS02ER, NPS160, NPS160ER or N90 options.
 10 N2AIR2, N2AIR2ER and N2AIR2EM not recommended for metal ceiling installations.
 11 Metal ceiling depth or top access required for battery pack maintenance.

DOWNLIGHTING LDN6



FEATURES & SPECIFICATIONS

INTENDED USE — For areas that require good vertical illumination and excellent glare control at low mounting heights. Ideal for open area retail spaces and sales. Not for use in installation in direct outdoor sunlight. Must be installed under canopy or covered ceiling. For direct sunlight installations, please refer to the 113 product family. **Certain airborne contaminants can diminish the integrity of acrylic and/or polycarbonate.** Click here for Acrylic/Polycarbonate Compatibility table for suitable uses.
Certain airborne contaminants may adversely affect the functioning of LEDs and other electronic components, depending on various factors such as concentrations of the contaminants, ventilation, and temperature at the end-user location. Click here for a list of substances that may not be suitable for interaction with LEDs and other electronic components.
CONSTRUCTION — One-piece SVA rated fiberglass housing with integral perimeter channel utilizes continuous poured-in-place NEMA 4X gasket. Simple two-piece design consists of housing and optical assembly to streamline installation process. Polymer latches positively attach to housing and keep from becoming a hindrance during install.
OPTICS — Injection molded, acrylic lens (0.80" thick), provides high impact resistance comparable to 100% DR. F1 rated for outdoor use, resists resist breaking, yellowing or becoming brittle over time. UV stabilized polycarbonate diffuser available (0.80" thick) in clear or frosted for additional impact strength. Polycarbonate lens is recommended for lower mounting heights where vandalism protection is desired.
ELECTRICAL — Tool-less one-piece optical assembly combines LEDs and lens into one component. Optical assembly easily connects to housing with plug and play harness, eliminating time consuming wiring connections. High-efficiency drivers operate 120-480V offered with 0-10V dimming, allowing granular control when coupled with wireless networking controls. Luminaire Surge Protection Level: Designed to withstand up to 2.5kV/0.75kA per ANSI C82.7-5-2015.
 L85 at 60,000 hours.
INSTALLATION — Two-piece design makes installations faster than ever by simplifying wiring connections. Power connections easily accommodated through pre-drilled holes at each end, optional wet location fittings available for maximum flexibility.
 Stainless steel (30316) surface spring-mounting brackets with ball wires standard (2 included) allow for ceiling, wall or suspended mount.
 Swivel stem (provided by others) when pendant mounting. Factory installed junction box option accommodates up to 4x4 sized boxes and includes integrated gasket to maintain wet location listings.
 Quick Mount Bracket (QMB) ships installed on fixture and is recommended for fastest surface mount installs. Ideal for end-to-end installations on larger jobs.
LISTINGS — CSA Certified to UL and C-UL standards. NEMA 4X rated. IP ratings: IP65 and IP66 rated. See page 3 for ambient.
 NSF listed for Splash Zone-1.
DesignLights Consortium™ (DLC) Premium qualified product and DLC qualified product. Not all versions of this product may be DLC Premium qualified or DLC qualified. Please check the DLC Qualified Products List at www.designlightsconsortium.com/DLC to confirm which versions are qualified.
BUY AMERICAN — Product with the BAA option is assembled in the USA and meets the Buy American/ government procurement requirements under FAR, DFARS and DOT. Please refer to www.acuitybrands.com/usa-american for additional information.
WARRANTY — 5-year limited warranty. Complete warranty terms located at: www.acuitybrands.com/support/warranty/terms-and-conditions.
 Note: Actual performance may differ as a result of end-user environment and application.
 All values are design or typical values, measured under laboratory conditions at 25 °C.
 Specifications subject to change without notice.



Buy American

Capable Luminaire

This item is an A+ capable luminaire, which has been designed and tested to provide consistent color appearance and out-of-the-box control compatibility with simple commissioning.


- All configurations of this luminaire meet the Acuity Brands' specification for chromatic consistency
- This luminaire is part of an A+ Certified solution for nLight™ control networks marked by a shaded background¹

To learn more about A+, visit www.acuitybrands.com/aplus.

¹See ordering tree for details


DIMENSIONS

All dimensions are shown in inches (centimeters) unless otherwise noted.

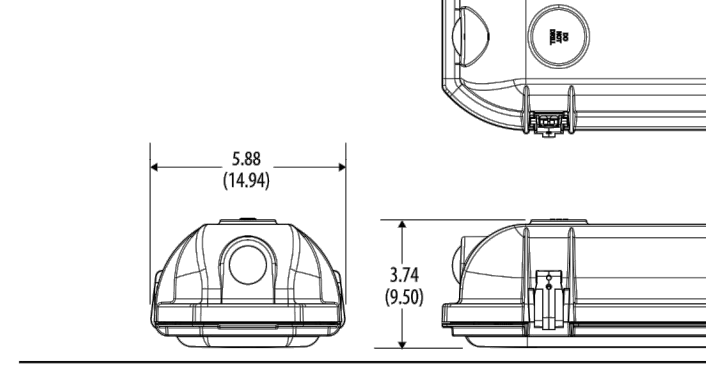


PHOTOMETRICS

INDUSTRIAL LITHONIA-DMW2-LINEAR-SURFACE-LED-ENCLOSED AND GASKETED




FEATURES & SPECIFICATIONS

Catalog Number
Notes
Type
SD/SDE



LDN6
 6" Open and Wall Wash LED
 Non-IC
 New Construction Downlight

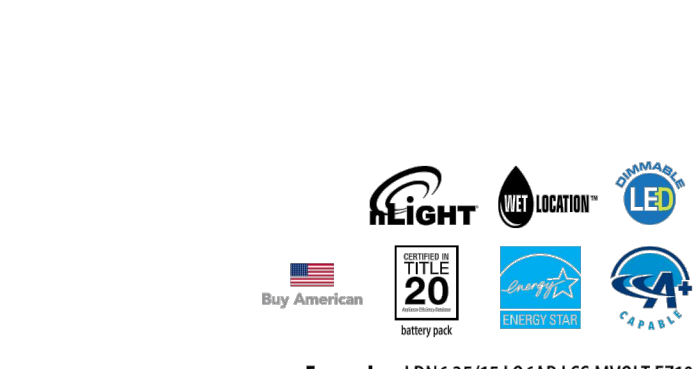

Buy American

ORDERING INFORMATION

Lead times will vary depending on options selected. Consult with your sales representative.

Series	Color temperature	Lumens ¹	Aperture/Trim Color	Finish	Voltage
LDN6	27	2700K	05 500 lumens	AR Clear	MVOLT Multi-volt
	30	3000K	25 2500 lumens	WR White	120 120V
	35	3500K	40 4000 lumens	BR Black	LD Matte diffuser
	40	4000K	50 5000 lumens	LS Specular	227 227V

Driver

Driver	Options	Finish
G210 0-10V driver dims to 10%	Single phase	N20 ⁹
G211 0-10V driver dims to 1%	White painted flange	J01 ¹⁰
D10 Minimum dimming 10% driver for use with J01	Black painted flange	NPS02 ¹⁰
D11 Minimum dimming 1% driver for use with J01	Emergency battery pack with integral test switch, 10W Constant Power, Not Certified in CA Title 20 MAEDS	NPS02ER ¹⁰
E210 0-10V eLED driver with smooth and flicker-free dimming performance down to 10%	Emergency battery pack with self-diagnostics, integral test switch, 10W Constant Power, Not Certified in CA Title 20 MAEDS	RR ¹⁰
E211 0-10V eLED driver with smooth and flicker-free dimming performance down to 10%	Emergency battery pack with self-diagnostics, integral test switch, 10W Constant Power with remote test switch, Certified in CA Title 20 MAEDS	N2AIR2 ¹⁰
E2AB 40-60 DALI DALI SDRIVE dimmer	nLight™ network power/playback pack with 0-10V dimming for non-eLED drivers (G210, G211, ER controls features on emergency circuit.	N2AIR2EM ¹⁰


Accessories: Order as separate catalog number.

PS105CP FMV Power Sentry battery pack, T20 compliant, field installable, low constant power	1 Not available with emergency systems.	9 Not available with CP, NPS02ER, NPS160, NPS160ER or N90 options.
EAC CSM 373 Compact interruptible emergency AC power system	2 Available with clear (AR) reflector only	10 N2AIR2, N2AIR2ER and N2AIR2EM not recommended for metal ceiling installations.
GR468 J2 Compact trim ring with 8" outside diameter ¹	3 Specify voltage for 3000m and above. 5000m with marked spacing 241, 241R, 141R. Not available with emergency battery pack option.	11 Metal ceiling depth or top access required for battery pack maintenance.

1 Overall height varies based on lumen package; refer to dimensional chart page 3.
 2 Not available with finishes.
 3 Must specify voltage for 3000m and above. 5000m with marked spacing 241, 241R, 141R. Not available with emergency battery pack option.
 4 Must specify voltage for 3000m and above. 5000m with marked spacing 241, 241R, 141R. Not available with emergency battery pack option.
 5 WFI requires an emergency hot lead and normal hot lead.
 6 Fixture height is 8" light level. Must be specified with PS02ER or NPS02ER. Only available with E210 and E211 drivers.
 7 WFI requires an emergency hot lead and normal hot lead.
 8 Fixture height is 8" light level. Must be specified with PS02ER or NPS02ER. Only available with E210 and E211 drivers.
 9 Not available with CP, NPS02ER, NPS160, NPS160ER or N90 options.
 10 N2AIR2, N2AIR2ER and N2AIR2EM not recommended for metal ceiling installations.
 11 Metal ceiling depth or top access required for battery pack maintenance.


DOWNLIGHTING LDN6

PROPOSED SELF-STORAGE
 NWC PIMA ROAD AND FRANK LLOYD WRIGHT BOULEVARD
 SCOTTSDALE, ARIZONA

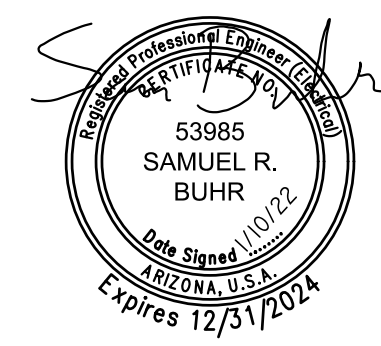


Project No: 21725
 Date: 11/22/21
 Drawn By: RS
 Reviewed By: SB

No.	Revision	Date
1	City Comments	01/10/2022

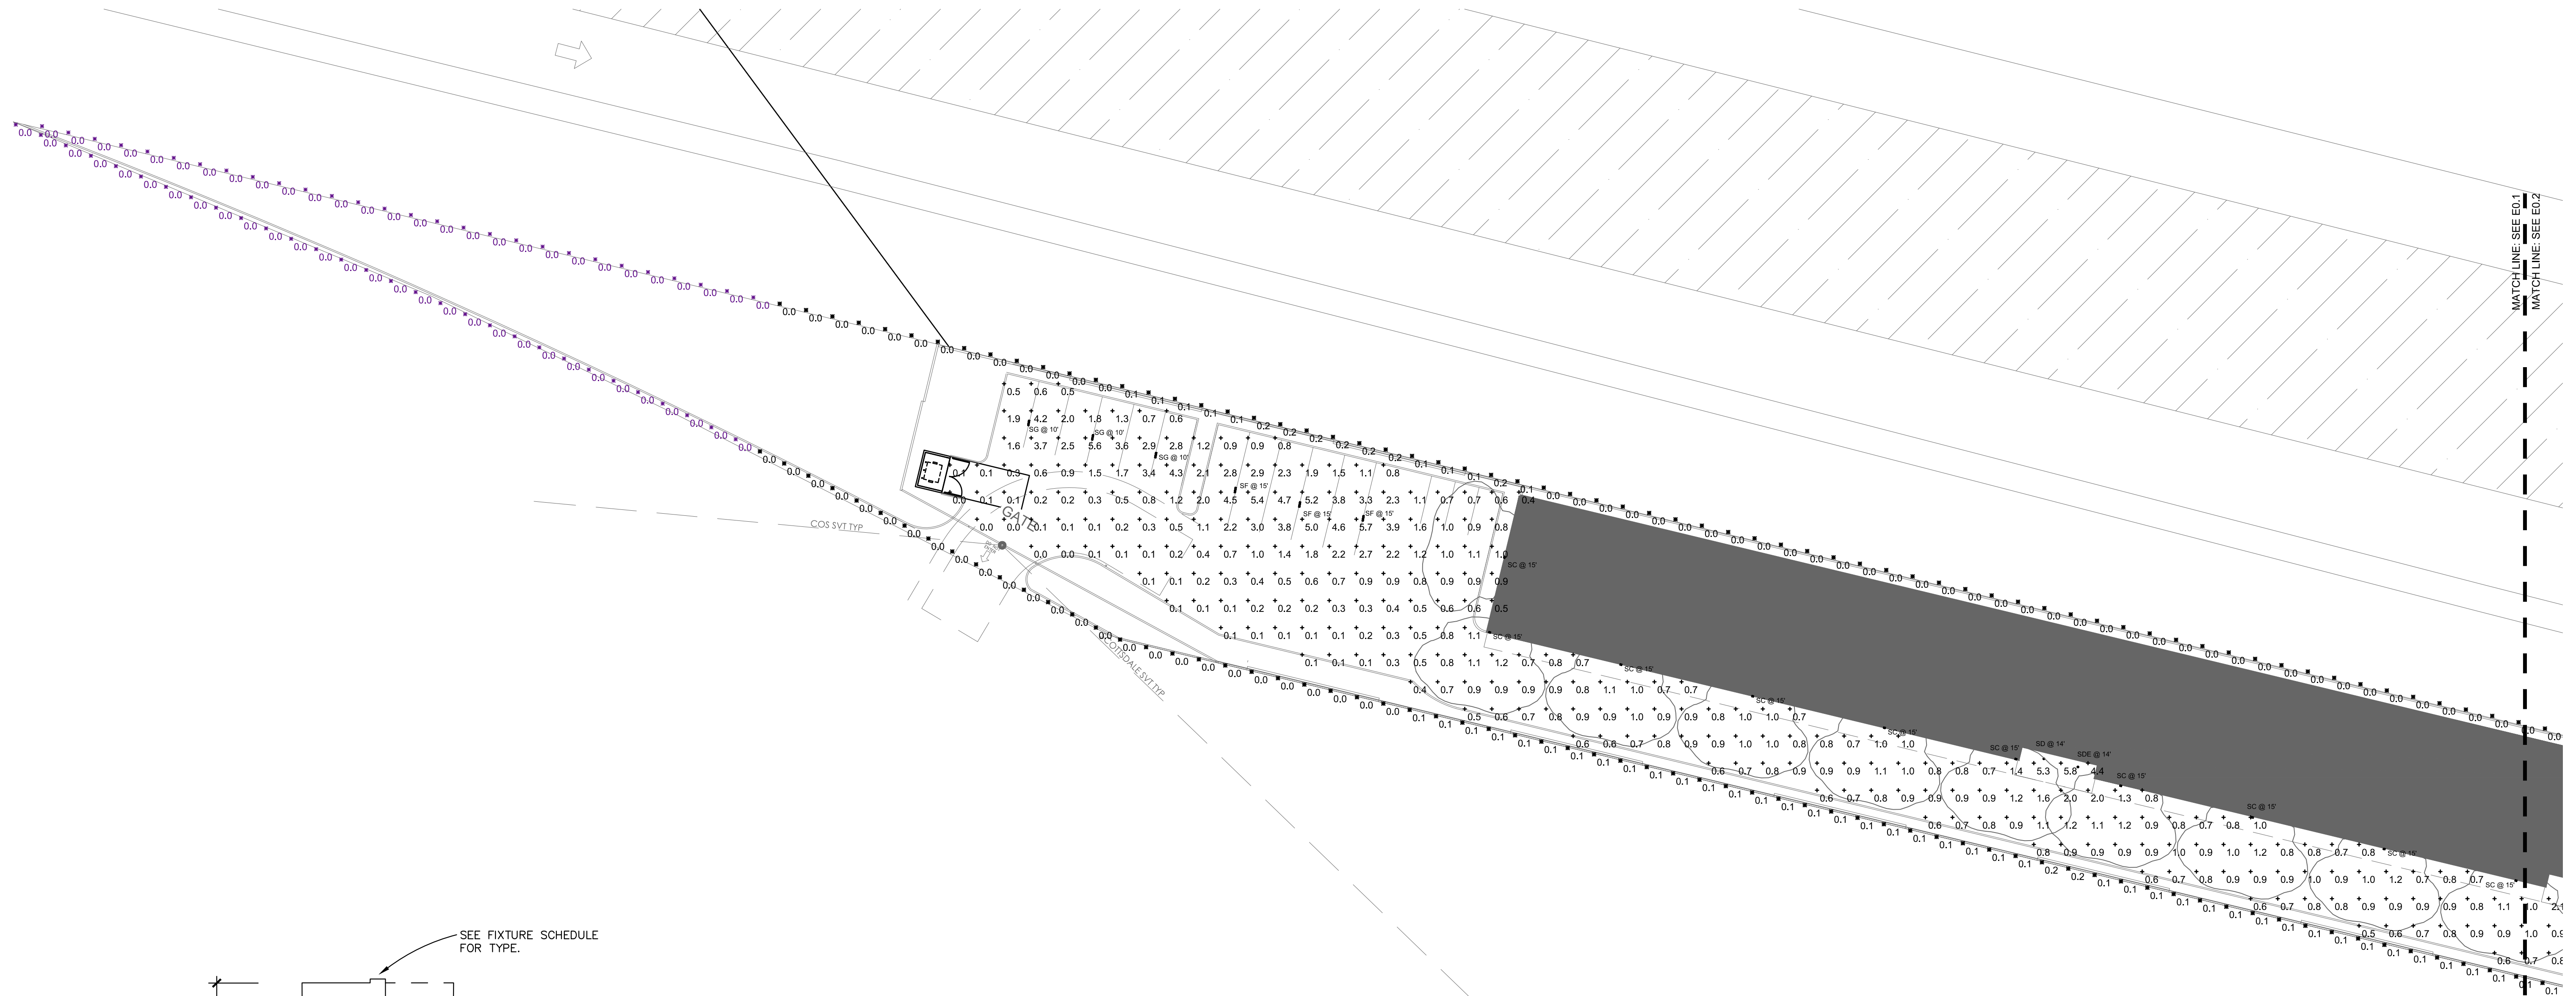


MATCH LINE SEE E01
MATCH LINE SEE E02

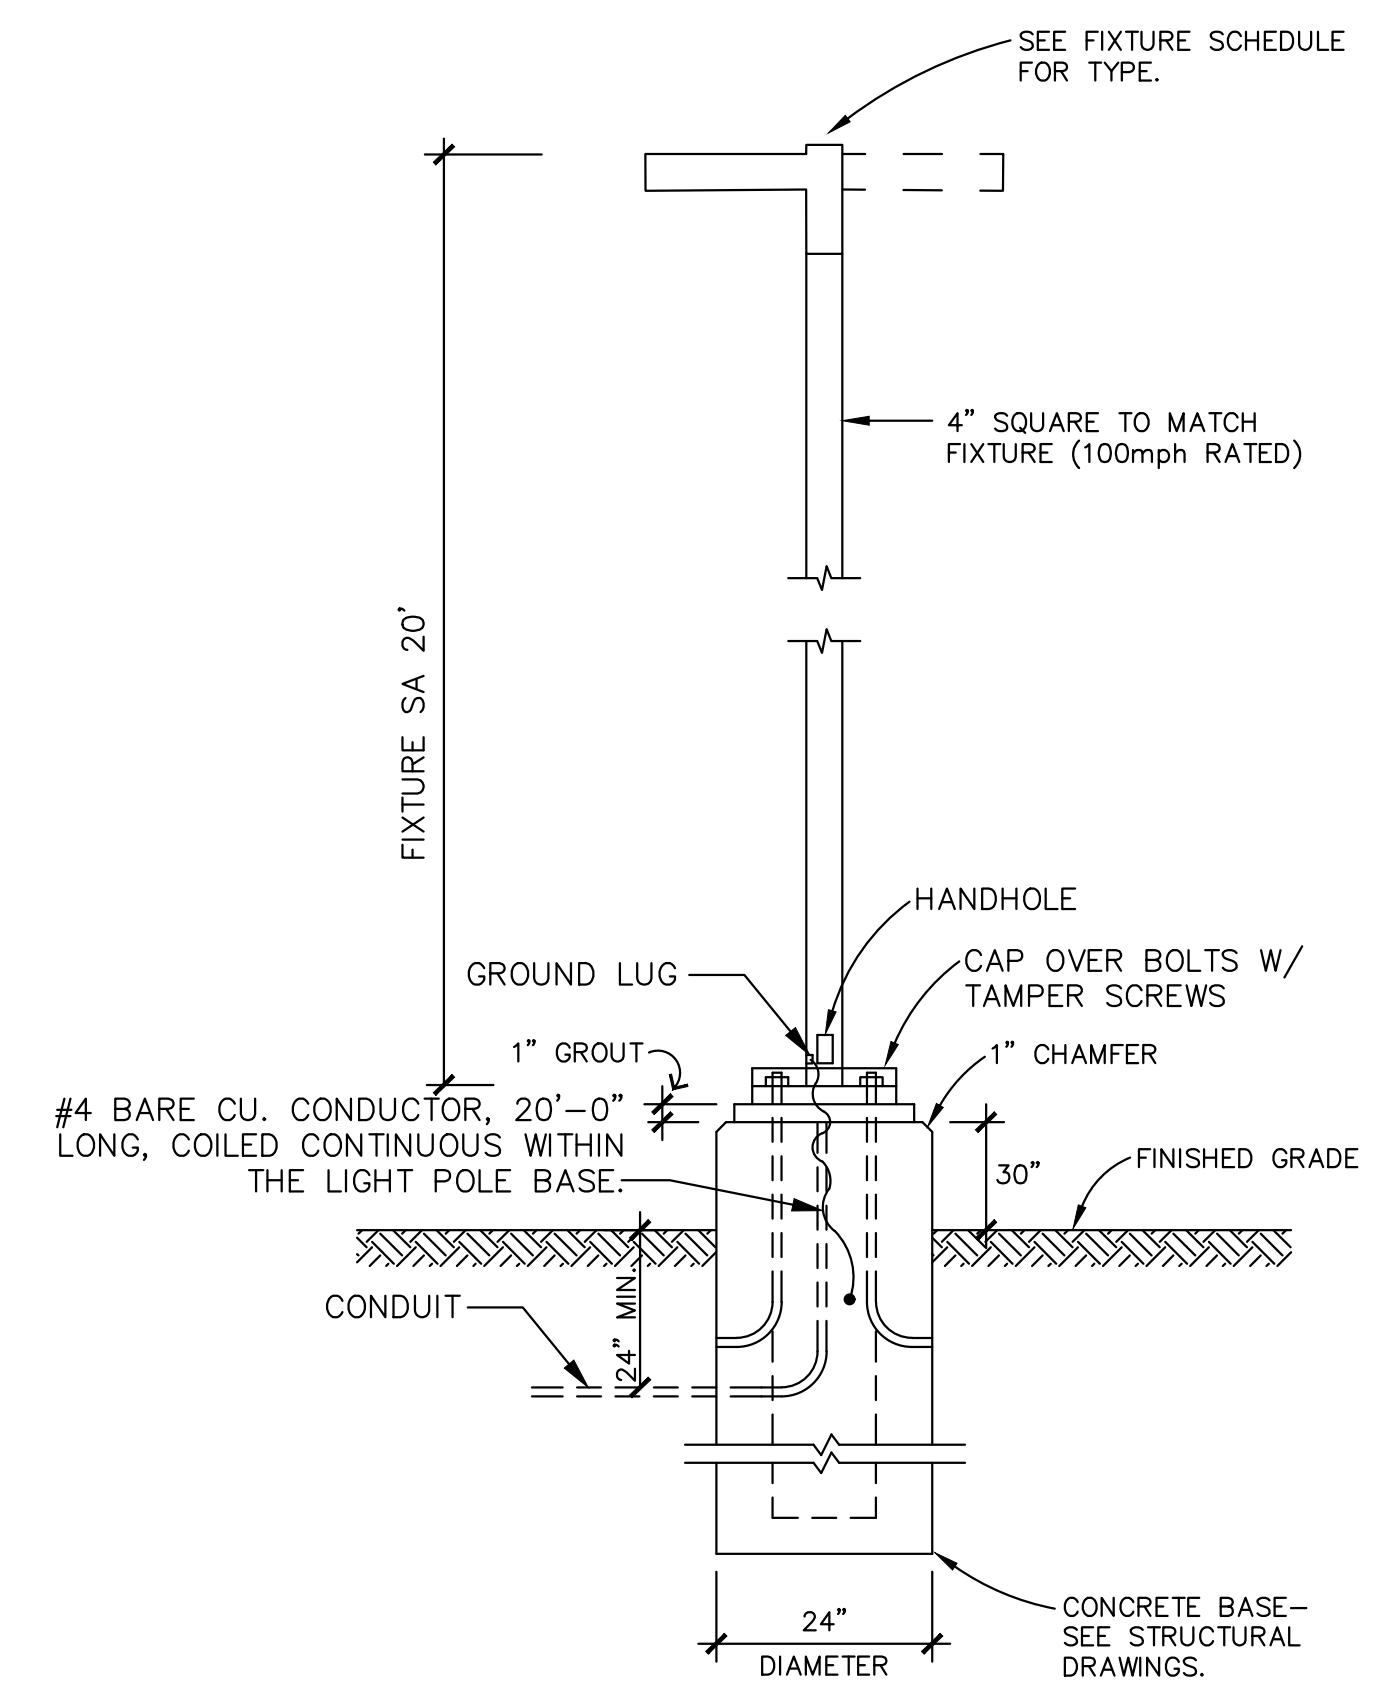

LIGHT POLE AND FIXTURE 'SA'


N.T.S.



ARDEBILI
Engineering
7328 E Stetson Dr.
Scottsdale, AZ 85251
P: 480.628.7072 | ardebileng.com
Project Number: 21725
Project Manager: RS

PROPOSED SELF-STORAGE

NWC PIMA ROAD AND FRANK LLOYD WRIGHT BOULEVARD
SCOTTSDALE, ARIZONA




Project No: 21725
Date: 11/22/21
Drawn By: RS
Reviewed By: SB

No	Revision	Date
1	City Comments	01/10/2022

Sheet Title:
PHOTOMETRIC PLAN

Sheet No.:


EO.1

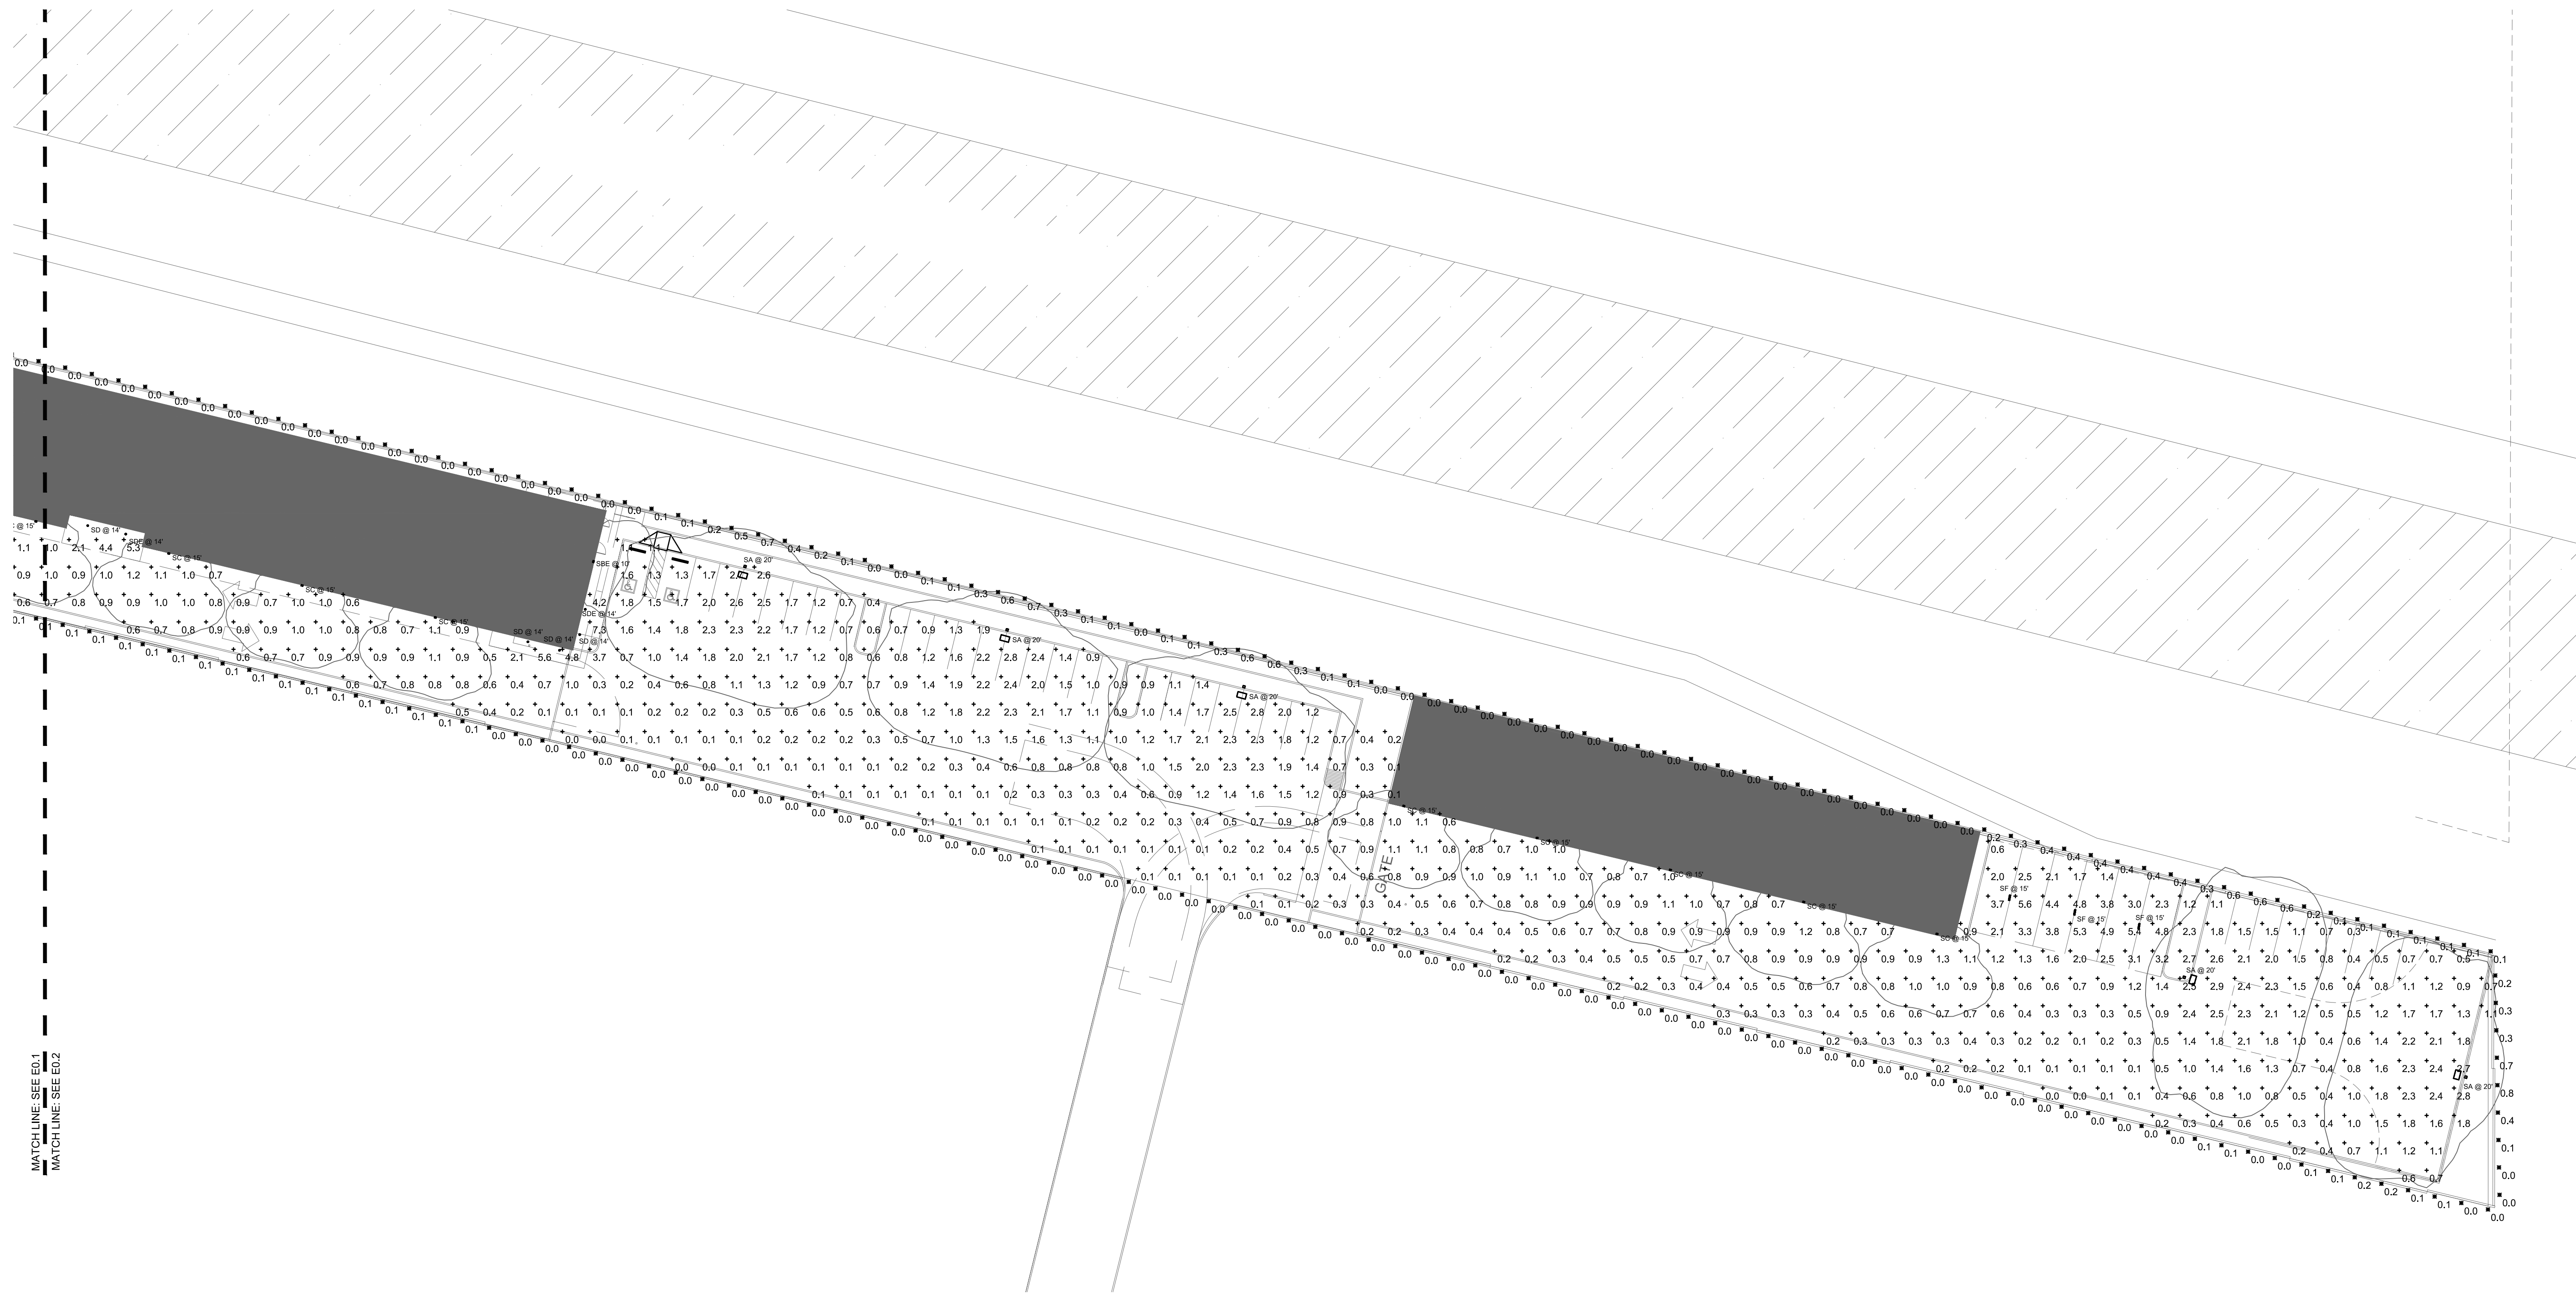

MATCH LINE SEE E01
MATCH LINE SEE E02

Statistics						
Description	Symbol	Avg	Max	Min	Max/Min	Avg/Min
PROPERTY LINE - FC @ 6' AFG	X	0.1 fc	0.8 fc	0.0 fc	N/A	N/A
SITE - FC @ GRADE	+	1.1 fc	7.3 fc	0.0 fc	N/A	N/A


Symbol	Label	Quantity	Manufacturer	Catalog Number	Description	Lamp	Filename	Lumens Per Lamp	Light Loss Factor	Wattage
SA	SA	5	Lithonia Lighting	DSX0 LED P4 40K TFTM MVOLT SPA HS (FINISH) / SSS 17.5" W/2.5" BASE	DSX0 LED P4 40K TFTM MVOLT with housings shield	LED - 4000K	DSX0_LED_P4_40K_TFTM_MVOLT_HS.ies	8243	0.91	92
SBE	SBE	1	Lithonia Lighting	WDGE2 LED P1 40K 80CRI TFTM E20WC MVOLT (FINISH)	WDGE2 LED WITH P1 - PERFORMANCE PACKAGE, 4000K, 80CRI, TYPE FORWARD THROW MEDIUM OPTIC W/EM BATTERY PACK	LED - 4000K	WDGE2_LED_P1_40K_80CRI_TFTM.ies	1245	0.91	11.1658
SC	SC	18	Lithonia Lighting	WDGE2 LED P2 40K 70CRI TFTM MVOLT (FINISH)	WDGE2 LED WITH P2 - PERFORMANCE PACKAGE, 4000K, 70CRI, TYPE FORWARD THROW MEDIUM OPTIC	LED - 4000K	WDGE2_LED_P2_40K_70CRI_TFTM.ies	2291	0.91	18.9815
SD	SD	5	Lithonia Lighting	LDN6 40/10 L06AR LSS MVOLT EZ10	6IN LDN, 4000K, 1000LM, 80CRI, CLEAR, SEMI-SPECULAR REFLECTOR	LED - 4000K	LDN6_40_10_L06AR_LSS.ies	1054	0.91	12.75
SDE	SDE	3	Lithonia Lighting	LDN6 40/10 L06AR LSS MVOLT EZ10 EL	6IN LDN, 4000K, 1000LM, 80CRI, CLEAR, SEMI-SPECULAR REFLECTOR W/EM BATTERY PACK	LED - 4000K	LDN6_40_10_L06AR_LSS.ies	1054	0.91	12.75
SF	SF	6	Lithonia Lighting	DMW2 4000LM WD AFL MVOLT GZ10 40K 80CRI	DMW2 L24 4000LM WD AFL MVOLT GZ1 40K 80CRI (GLEDS)	LED - 4000K	DMW2_4000LM_WD_AFL_MVOLT_GZ1_MVOLT_40K_80CRI.ies	4215	0.91	39.9
SG	SG	3	Lithonia Lighting	DMW2 2000LM WD AFL MVOLT GZ10 40K 80CRI	DMW2 L24 2000LM WD AFL MVOLT GZ1 40K 80CRI (GLEDS)	LED - 4000K	DMW2_2000LM_WD_AFL_MVOLT_GZ1_MVOLT_40K_80CRI.ies	2202	0.91	18.78



ARDEBILI
Engineering
7328 E Stetson Dr.
Scottsdale, AZ 85251
P: 480.628.7072 | ardebilieng.com
Project Number: 21725
Project Manager: RS

PROPOSED SELF-STORAGE

NWC PIMA ROAD AND FRANK LLOYD WRIGHT BOULEVARD
SCOTTSDALE, ARIZONA

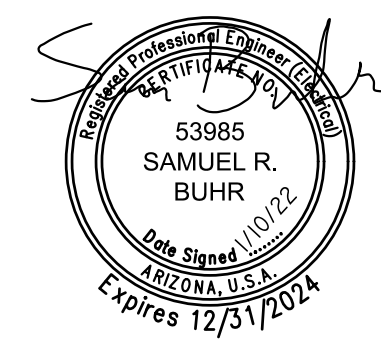

Project No: 21725
Date: 11/22/21
Drawn By: RS
Reviewed By: SB

No	Revision	Date
1	City Comments	01/10/2022

Sheet Title:
PHOTOMETRIC PLAN-CONT.

Sheet No.:
E0.2