



Aura Linear - Wall Grazer

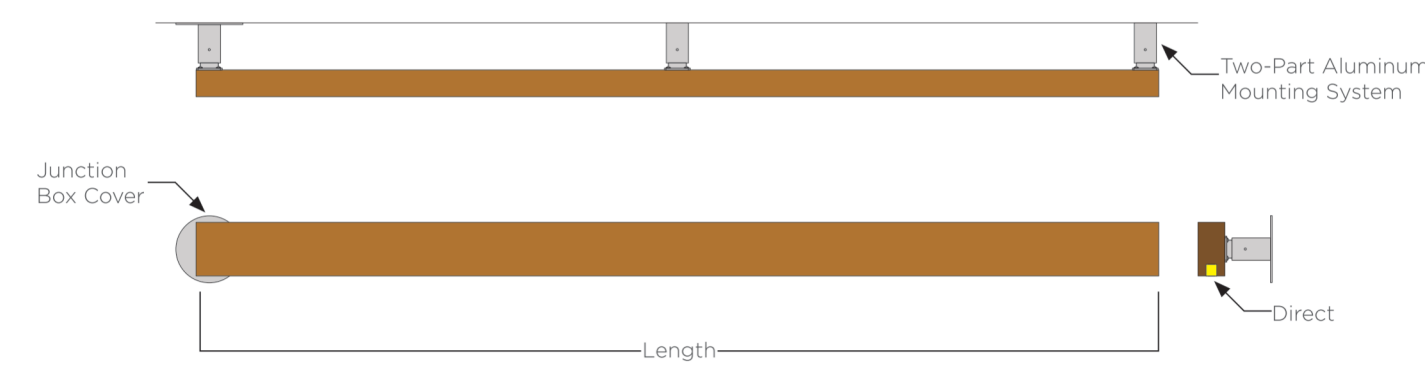

| Length | Standard Output | | Medium Output | | High Output | | Weight |
|--------|-----------------|-------|---------------|-------|-------------|-------|--------|
| | Lumens | Watts | Lumens | Watts | Lumens | Watts | |
| 2' | 216 | 3 | 396 | 6 | 588 | 10 | 7lbs. |
| 4' | 432 | 6 | 792 | 12 | 1176 | 20 | 12lbs. |
| 6' | 648 | 9 | 1182 | 18 | 1764 | 30 | 17lbs. |
| 8' | 864 | 12 | 1584 | 24 | 2352 | 40 | 22lbs. |
| 10' | 1080 | 15 | 1980 | 30 | 2940 | 50 | 27lbs. |
| 12' | 1296 | 18 | 2376 | 36 | 3528 | 60 | 31lbs. |




ORDERING GUIDE: EXAMPLE: AURA-LNR-D-6-L35MO-S7-C24-STD

AURA LNR D 4 5 6 7 8 9 10


| | | | | | | | |
|------|----------|-----|--------|------|---|-----|-------------------|
| 1 | Series | 4 | Length | 6 | Output | 9 | Mounting |
| AURA | Aura | 2 | 2' | SO | Standard Output | G24 | 4" Grazer Mount |
| 2 | Series | 6 | 4' | MO | Medium Output | G28 | 8" Grazer Mount |
| LNR | Linear | 8 | 6' | HO | High Output | 10 | Special |
| 3 | Lighting | 10 | 8' | STD | Wood Finish | MOD | Standard Modified |
| D | Direct | 12 | 10' | 5* | See color options on finishes technical sheet | | |
| | | 5 | 12' | | | | |
| | | L27 | CCT | 8 | Metal Finish | | |
| | | L30 | 2700K | ---- | See color options on finishes technical sheet | | |
| | | L35 | 3000K | | | | |
| | | L40 | 3500K | CSM | Custom Color | | |
| | | | 4000K | | | | |

128 ©2021 STRUCTURA, INC.


Aura Linear - Direct Lighting

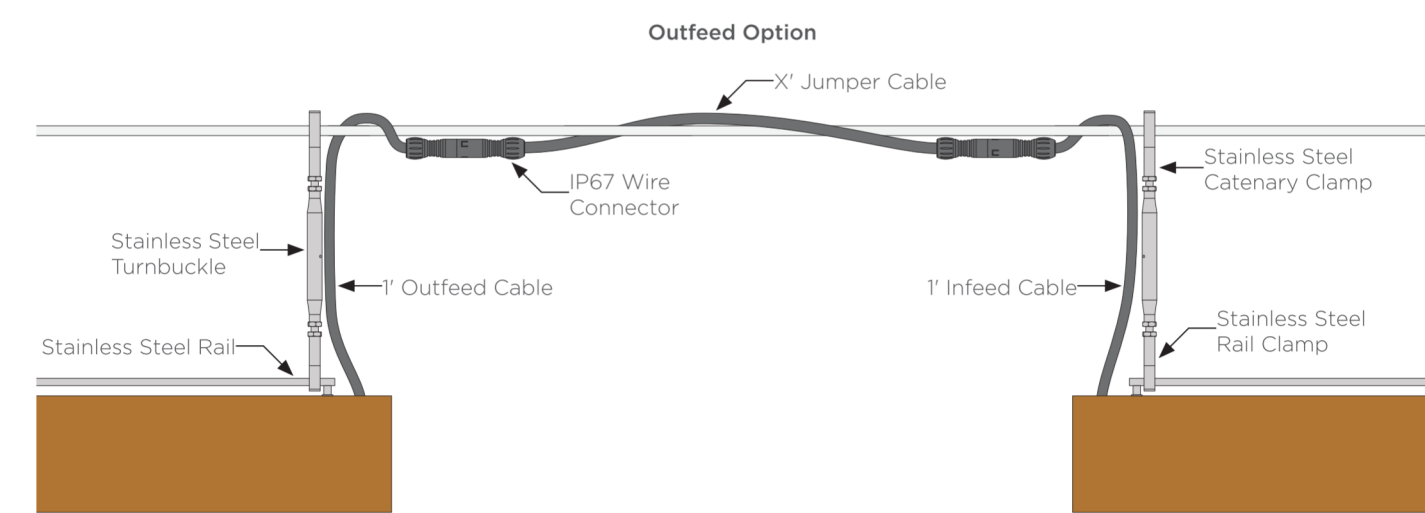

Aura Linear - Direct/Indirect Lighting

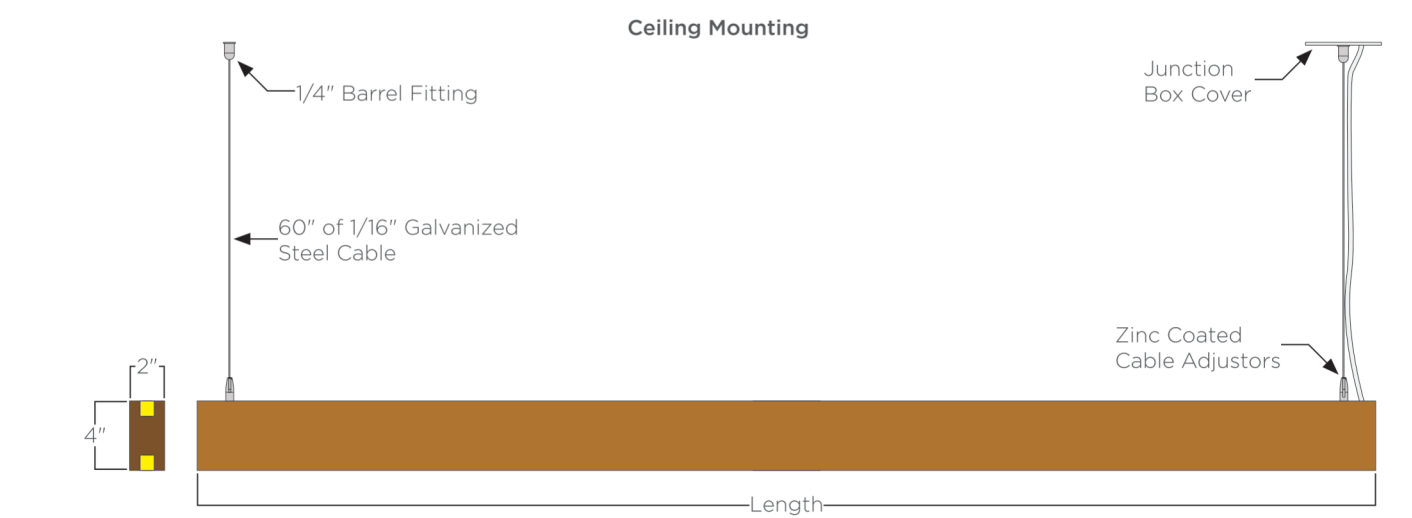

| Length | Standard Output | | Medium Output | | High Output | | Weight | EPA |
|--------|-----------------------|-------|-----------------------|-------|-----------------------|-------|--------|---------------------|
| | Lumens ⁽¹⁾ | Watts | Lumens ⁽²⁾ | Watts | Lumens ⁽²⁾ | Watts | | |
| 2' | 414 | 6 | 759 | 12 | 1127 | 20 | 5lbs. | .84ft ² |
| 4' | 846 | 12 | 1551 | 24 | 2302 | 40 | 10lbs. | 1.64ft ² |
| 6' | 1278 | 18 | 2343 | 36 | 3479 | 60 | 14lbs. | 2.44ft ² |
| 8' | 1710 | 24 | 3135 | 48 | 4655 | 80 | 19lbs. | 3.24ft ² |
| 10' | 2142 | 30 | 3927 | 60 | 5831 | 100 | 24lbs. | 4.04ft ² |
| 12' | 2574 | 36 | 4719 | 72 | 7007 | 120 | 28lbs. | 4.84ft ² |

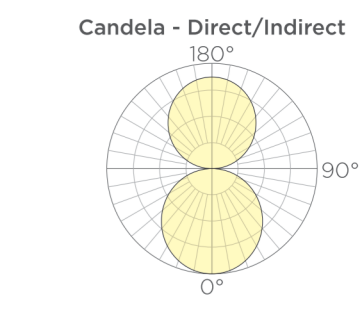

ORDERING GUIDE: EXAMPLE: AURA-LNR-D/I-8-L35MO-S6-CE-STD


AURA LNR D/I 4 5 6 7 8 9

| | | | | | | | |
|------|------------------|-----|--------|------|---|----|----------------|
| 1 | Series | 4 | Length | 6 | Output | 8 | Mounting |
| AURA | Aura | 2 | 2' | SO | Standard Output | CE | Ceiling Canopy |
| 2 | Series | 6 | 4' | MO | Medium Output | | |
| LNR | Linear | 8 | 6' | HO | High Output | | |
| 3 | Lighting | 10 | 8' | 7 | Wood Finish | | |
| D/I | Direct/ Indirect | 12 | 10' | 5* | See color options on finishes technical sheet | | |
| | | 5 | 12' | | | | |
| | | L27 | CCT | 8 | Metal Finish | | |
| | | L30 | 2700K | ---- | See color options on finishes technical sheet | | |
| | | L35 | 3000K | | | | |
| | | L40 | 3500K | | | | |
| | | | 4000K | | | | |


1. Lumen output based upon 3000K CCT.

126 ©2021 STRUCTURA, INC.

Aura Linear - Wall Mount

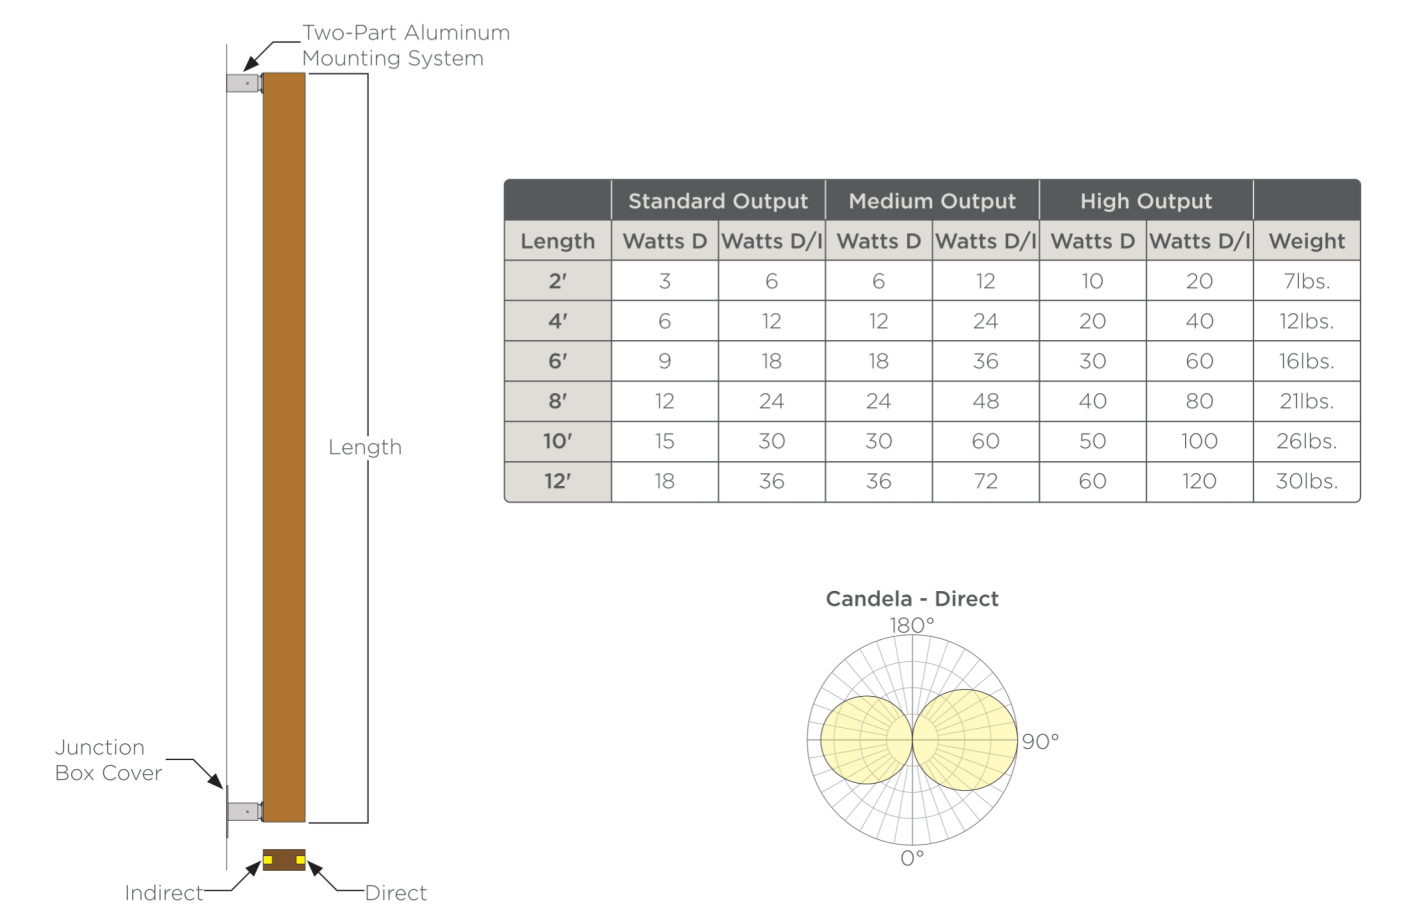

| Length | Standard Output | | Medium Output | | High Output | | Weight |
|--------|-----------------|-----------|---------------|-----------|-------------|-----------|--------|
| | Watts D/ | Watts D/I | Watts D/ | Watts D/I | Watts D/ | Watts D/I | |
| 2' | 3 | 6 | 6 | 12 | 10 | 20 | 7lbs. |
| 4' | 6 | 12 | 12 | 24 | 20 | 40 | 12lbs. |
| 6' | 9 | 18 | 18 | 36 | 30 | 60 | 16lbs. |
| 8' | 12 | 24 | 24 | 48 | 40 | 80 | 21lbs. |
| 10' | 15 | 30 | 30 | 60 | 50 | 100 | 26lbs. |
| 12' | 18 | 36 | 36 | 72 | 60 | 120 | 30lbs. |



ORDERING GUIDE: EXAMPLE: AURA-LNR-D/I-8-L35SO-S3-CI-WA4-STD

AURA LNR 4 5 6 7 8 9 10

| | | | | | | | |
|-------|--------------------|-----|--------|------|---|-----|-------------------|
| 1 | Series | 4 | Length | 6 | Output | 9 | Mounting |
| AURA | Aura | 2 | 2' | SO | Standard Output | WA4 | 4" Wall Mount |
| 2 | Series | 6 | 4' | MO | Medium Output | WA8 | 8" Wall Mount |
| LNR | Linear | 8 | 6' | HO | High Output | 10 | Special |
| 3 | Lighting | 10 | 8' | 7 | Wood Finish | STD | Standard Modified |
| D | Direct | 12 | 10' | 5* | See color options on finishes technical sheet | | |
| I | Indirect | 5 | 12' | | | | |
| I/D/I | Indirect/ Indirect | L27 | CCT | 8 | Metal Finish | | |
| | | L30 | 2700K | ---- | See color options on finishes technical sheet | | |
| | | L35 | 3000K | | | | |
| | | L40 | 3500K | CSM | Custom Color | | |
| | | | 4000K | | | | |

Product specification sheets subject to change.

©2021 STRUCTURA, INC. 129

Aura Illuminated Wooden Linear Pendant



FIXTURE TYPE: _____
PROJECT NAME: _____



Solid wood exterior/interior LED round pendant.

FEATURES:

- Available in 2' to 12' lengths
- >90CRI smooth, dot free illumination
- Dimmable outdoor rated power supply and IP67 luminaire
- Catenary cable, ceiling, and wall mounting options

SPECIFICATIONS:

HOUSING: Solid Acacia wood linear assembled through glulam construction and precision machined using CNC technology. Adhesive complies with ASTM D-2559 glulam construction specifications for extreme exposed weather conditions, waterproof, and rated for wet or dry use exposure.

ELECTRICAL: Powered by a standalone G-Tran QZ, 120-277VAC primary/24VDC secondary outdoor rated remote dimmable power supply. Power supply features built-in short circuit protection, over

load protection, and over temperature protection. System is forward phase, reverse phase, and 1/40V dimming. Consult factory for other driver options. Catenary mounted fixtures supplied with 1" infeed cable; a 40' leader cable supplied with infeed only fixtures. Ceiling canopy mounted fixtures supplied with 6" infeed cable. Operating temperature of -13°F to 125°F SO, 115°F MO, and 108°F HO.

OPTICAL SYSTEM: Available in 2700K, 3000K, 3500K, 4000K color temperatures with smooth, dot free illumination. Consult factory for other lumen outputs.

FINISHES AND MATERIALS: Wood is finished with a low VOC waterborne matte exterior finish containing UV and mildew inhibitors. [Care and Maintenance](#)


HARDWARE: All fasteners and non-wood components are stainless steel unless otherwise noted.

LISTINGS & RATINGS: Luminaire CSA listed according to CSA C22.2 No. 250.0-18/UL Standard 1598 and UL Standard 2108. Suitable for wet locations. LM-80 test calculated L70 > 40,000 hours.


WARRANTY: 25-year wood warranty with a 2-year finish warranty, 3-year warranty on LED and driver.

124 ©2021 STRUCTURA, INC.

Aura Linear - Direct Lighting

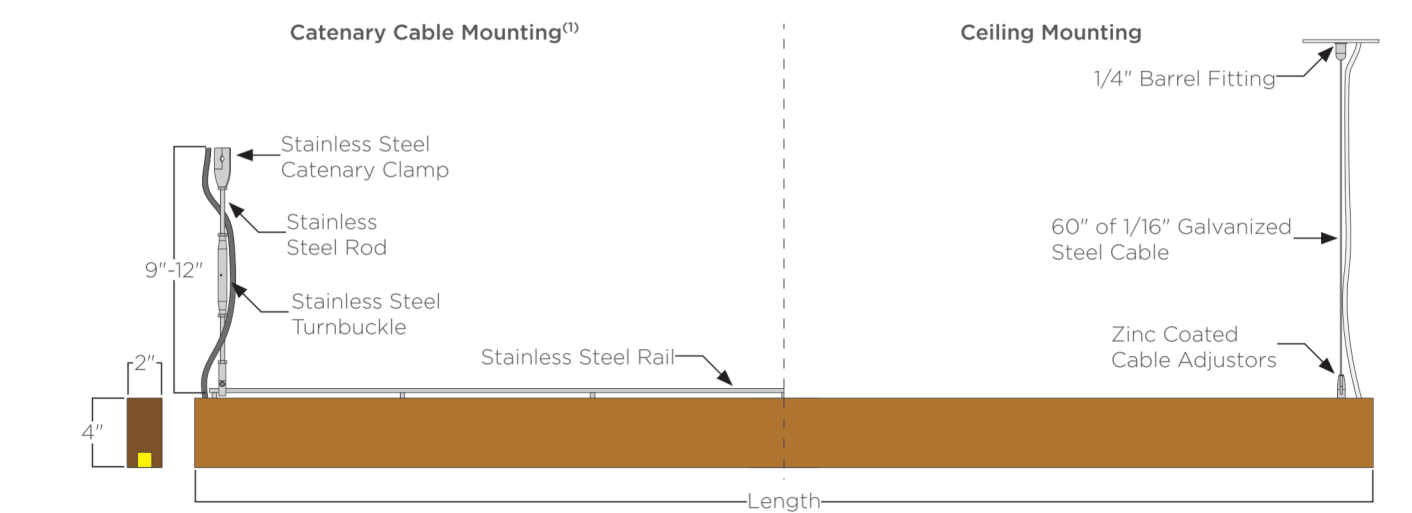

| Length | Standard Output | | Medium Output | | High Output | | Weight ⁽³⁾ | EPA ⁽⁴⁾ |
|--------|-----------------------|-------|-----------------------|-------|-----------------------|-------|-----------------------|---------------------|
| | Lumens ⁽²⁾ | Watts | Lumens ⁽²⁾ | Watts | Lumens ⁽²⁾ | Watts | | |
| 2' | 216 | 3 | 396 | 6 | 588 | 10 | 6lbs. | .90ft ² |
| 4' | 432 | 6 | 792 | 12 | 1176 | 20 | 11lbs. | 1.70ft ² |
| 6' | 648 | 9 | 1182 | 18 | 1764 | 30 | 15lbs. | 2.50ft ² |
| 8' | 864 | 12 | 1584 | 24 | 2352 | 40 | 20lbs. | 3.30ft ² |
| 10' | 1080 | 15 | 1980 | 30 | 2940 | 50 | 25lbs. | 4.10ft ² |
| 12' | 1296 | 18 | 2376 | 36 | 3528 | 60 | 29lbs. | 4.90ft ² |

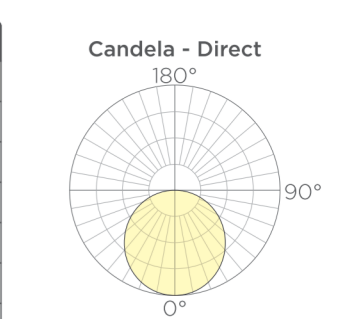

ORDERING GUIDE: EXAMPLE: AURA-LNR-D-6-L30HO-S3-CA-OF2-STD

AURA LNR D 4 5 6 7 8 9 10

| | | | | | | | |
|------|----------|-----|--------|----|---|-------|------------------------|
| 1 | Series | 4 | Length | 6 | Output | 9 | Outfeed ⁽⁴⁾ |
| AURA | Aura | 2 | 2' | SO | Standard Output | BLANK | No Outfeed |
| 2 | Series | 6 | 4' | MO | Medium Output | OF | 1' Outfeed |
| LNR | Linear | 8 | 6' | HO | High Output | OF2 | Outfeed + 2' Jumper |
| 3 | Lighting | 10 | 8' | 7 | Wood Finish | OF4 | Outfeed + 4' Jumper |
| D | Direct | 12 | 10' | 5* | See color options on finishes technical sheet | OF* | Outfeed + X' Jumper |
| | | 5 | 12' | | | 10 | Special |
| | | L27 | CCT | 8 | Mounting | STD | Standard Modified |
| | | L30 | 2700K | CA | Catenary Cable | MOD | |
| | | L35 | 3000K | CE | Ceiling Canopy | | |
| | | L40 | 3500K | | | | |
| | | | 4000K | | | | |

1. Catenary cable designed and provided separately.
2. Lumen output based upon 3000K CCT.
3. Weight and EPA based off of catenary mounting option.
4. Out feed option for daisy chain applications with master and satellite control. Maximum total run distance per power supply: 66' for SO, 33' for MO, and 20' for HO.

Product specification sheets subject to change.

©2021 STRUCTURA, INC. 125

THE KIMSEY

7120 E INDIAN SCHOOL RD,
SCOTTSDALE, AZ 85251

- CASE PRE-APP NUMBER -
63-PA-2020

Gensler

2575 E Camelback Road Suite 175
Phoenix, AZ 85016
United States
Tel 602.523.4900
Fax 602.523.4949

SYDNOR

4806 N 78TH Place
Scottsdale, AZ 85251
United States
Tel 480.206.4593

| Date | Description |
|----------|--------------------------|
| 06/18/21 | Development Review Board |

Seal / Signature

NOT FOR CONSTRUCTION

Project Name
3RD AVENUE + INDIAN SCHOOL
ROAD - SCOTTSDALE, AZ

Project Number
057.6850.000

Description
LIGHTING CUT SHEETS

Scale
12" = 1'-0"

52.5

© 2015 Gensler