



**WATER DISTRIBUTION SYSTEM
BASIS OF DESIGN REPORT
FOR
ONE SCOTTSDALE – LOT 3**

July 21, 2022
WP# 225336

FINAL Basis of Design Report

APPROVED

APPROVED AS NOTED

REVISE AND RESUBMIT

CITY OF SCOTTSDALE
SCOTTSDALE WATER
9379 E San Salvador Dr.
Scottsdale, AZ 85258

Disclaimer: If approved; the approval is granted under the condition that the final construction documents submitted for city review will match the information herein. Any subsequent changes in the water or sewer design that materially impact design criteria or standards will require re-analysis, re-submittal, and approval of a revised basis of design report prior to the plan review submission.; this approval is not a guarantee of construction document acceptance. For questions or clarifications contact the Water Resources Planning and Engineering Department at 480-312-5685.

BY Idillon DATE 9/8/2022

- 1) Refer to utility plan in Exhibit 2 at end of this report for the interpreted extent of the water lines to be constructed prior or along with this development. Conform to all previous master plans and related case stipulations.
- 2) All related water easements shall be provided.
- 3) CLSM backfill service line between meter and backflow if they are not adjacent.
- 4) large water meter to be placed in vault per COS detail 2345



EXPIRES 6-30-24

TABLE OF CONTENTS

1.0 INTRODUCTION..... 1

2.0 EXISTING WATER INFRASTRUCTURE..... 2

3.0 PROPOSED WATER INFRASTRUCTURE 3

 3.1 Onsite Water Infrastructure 3

 3.2 Water Demand Calculations 3

4.0 CONCLUSIONS..... 4

5.0 REFERENCES..... 5

APPENDICES

APPENDIX A Water Demand Calculations

APPENDIX B Master Report Calculations Relevant to One Scottsdale – Lot 3 Improvements

APPENDIX C Approved Master On-Site Water Plan for One Scottsdale (Stacked 40s) by Wood, Patel & Associates, Inc. Revised January 28, 2016

EXHIBITS

EXHIBIT 1 Vicinity Map

EXHIBIT 2 On-Site Water Distribution System Exhibit (From Master Report)

EXHIBIT 3 Modeled On-Site Land Use Plan (From Master Report)

EXHIBIT 4 One Scottsdale – Lot 3 Water Exhibit

se
Y:\WP\Reports\Commercial\225336 One Scottsdale Lot 3 - Grand Peaks Water BOD.docx



EXPIRES 6-30-24

1.0 INTRODUCTION

One Scottsdale – Lot 3 (Site) is comprised of an approximately 3.67-acre site and located within the One Scottsdale community development. It is located south of Legacy Boulevard and east of Scottsdale Road. The Site is located within Section 26, Township 4 North, Range 4 East of the Gila and Salt River Meridian. Refer to Exhibit 1 – *Vicinity Map*.

The proposed development for the One Scottsdale – Lot 3 parcel consists of 280-unit multi-family building that surrounds a 5.5 level parking garage. Proposed site improvements include associated landscape, hardscape, paving and utility services.

Prior to submittal of the Report, a Master Report titled *One Scottsdale (Stacked 40s) Master Onsite Water Plan* was approved by the City of Scottsdale. The proposed site improvements analyzed in this Report are included within the Planning Unit II portion of the Master Report. Specifically, the Site is proposed to align with sub-area 4C as denoted within Exhibit 3 – *Modeled On-Site Land Use Plan (From Master Report)* for a depiction of the phase areas.

The design criteria used to estimate potable water demands are based on the design criteria used in the *One Scottsdale (Stacked 40s) Master Onsite Water Plan*. The design criteria used to estimate fire flow demands are based on the International Fire Code, 2018. The following is a summary of the primary design criteria utilized:

Average Day Water Demand, Multi-Family Residential:.....	228 gpd/DU*
Maximum Day Demand:	2.0 x ADD
Peak Hour Demand:.....	3.5 x ADD
Fire Flow Demand:.....	3,000 gpm (6,000 gpm * 50% reduction)
Minimum Residual Pressure, Peak Hour:	50 psi
Minimum Residual Pressure, Maximum Day + Fire Flow:	30 psi
Maximum System Pressure:	120 psi
Maximum Pipe Head Loss, Maximum Day Demand:	8 ft / 1000 ft
Maximum Pipe Head Loss, Peak Hour Demand:	10 ft / 1000 ft
<u>Minimum Pipe Diameter, Public Water line:</u>	<u>8 inches</u>

Abbreviations: ADD = average day demand; DU = dwelling unit; gpd = gallons per day; gpm = gallons per minute; ft = feet; psi = pounds per square inch

*Includes both inside and outside use, per Figure 6-1.2, City of Scottsdale *Design Standards and Policies Manual*

2.0 EXISTING WATER INFRASTRUCTURE

Existing water infrastructure adjacent to Planning Unit II includes existing 16-inch public water lines within Legacy Boulevard and Scottsdale Road. Two (2) existing 12-inch water stubs extend from the public water line within Legacy Boulevard to the northern property boundary of Planning Unit II. One (1) existing 8-inch water stub extends from the public water line within Scottsdale Road to the western property boundary of Planning Unit II. Two (2) existing fire hydrants extend from the public water line within Legacy Boulevard and are located along the northern property boundary of Planning Unit II. There is also a 20-inch distribution main within Legacy Boulevard that downsizes to a 12-inch pipe in Scottsdale Road.

Within the southern portion of Planning Unit II, there is an existing public 12-inch water line loop that connects to the 16-inch public main in Scottsdale Road at two locations. This private loop serves six (6) existing fire hydrants located along Henkel Way, as well as domestic service for the existing building on the south edge of Planning Unit II. A portion of the 12-inch water loop is located south of the Site within Henkel Way and extends north into the Site along the eastern property boundary. Please refer to Exhibit 2 – *On-Site Water Distribution System Exhibit (From Master Report)* for a depiction of existing infrastructure.

Per the One Scottsdale Private Drive Improvement Plan (30-DR-2021), a 12-inch water line is to be constructed from one of the 12-inch water stubs within Legacy Boulevard to the existing 12-inch water line loop. Additionally, a portion of the existing water line loop is to be relocated to along the north property line of the Site to avoid the proposed Portico – One Scottsdale development, a multi-family project being developed north of the Site. Per the Portico – One Scottsdale Improvement Plan (30-DR-2021#2), a fire hydrant is to be constructed near the northeast corner of the Site along the realigned portion of the 12-inch water line loop. These improvements to the adjacent infrastructure are to be completed before construction for the Site begins. Please refer to Exhibit 4 – *One Scottsdale – Lot 3 Water Exhibit* for a depiction of the adjacent water infrastructure to be constructed prior to the construction of the Site.

Refer to utility plan in Exhibit 2 at end of this report for the interpreted extent of the water lines to be constructed prior or along with this development. Conform to all previous master plans and related case stipulations.

3.0 PROPOSED WATER INFRASTRUCTURE

3.1 Onsite Water Infrastructure

A Master Report was previously approved by the City of Scottsdale titled *One Scottsdale (Stacked 40s) Master Onsite Water Plan*. The Master Report analyzed the overall water demands for the One Scottsdale project, including the proposed project Site. The water infrastructure for Planning Unit II proposed in this Master Report includes the infrastructure described in Section 2.0 as well as one (1) additional proposed 12-inch water line to be constructed alongside future development. Please refer to Exhibit 2 – *On-Site Water Distribution System Exhibit (From Master Report)* for a depiction of proposed master plan infrastructure.

Water and fire services for the Site will extend from the existing 12-inch water line within Henkel Way to the south. Potable water service for the Site will be provided by a 4-inch water service, meter, and backflow prevention device. Fire services will be provided by an 8-inch fireline with backflow located internal to the building. Two (2) existing fire hydrants located south of the Site along Henkel Way will be relocated to avoid conflicts with proposed improvement to Henkel Way. Please refer to Exhibit 4 – *One Scottsdale – Lot 3 Water Exhibit* for a depiction of proposed water infrastructure for the Site.

3.2 Water Demand Calculations

Based on the design criteria utilized within the Master Report, the projected average-day water demand for the Site is calculated to be 63,840 gallons per day (gpd), or 44 gallons per minute (gpm). The projected maximum day demand is 88 gpm while the projected peak demand is 154 gpm. The proposed fire flow to the Site is 3,000 gpm. The previously approved *One Scottsdale (Stacked 40s) Master Onsite Water Plan* calculated the peak hour demand for sub-area 4C to be 207 gpm and the fire flow to be 2,500 gpm. See Appendix A – *Water Demand Calculations* for both the Master Report Calculations and the calculations for the project Site. Per these numbers, the calculated domestic demands for the proposed Site improvements are less than what was anticipated in the Master Report analysis, while the fire flow demand exceeds this value. While proposed fire flow demands are greater than the anticipated demand found in the Master Report, upon further analysis of the fire flow results from that report, the available fire flow capacity of the system exceeds the proposed 3,000 gpm. Per Appendix B – *Master Report Calculations Relevant to One Scottsdale – Lot 3 Improvements*, the fire flow available in all nodes adjacent to the Site is greater than the proposed fire flow, with the minimum available fire flow being 3,743 gpm.

4.0 CONCLUSIONS

Based on our analysis of the Site, the following conclusions can be made:

1. The design criteria used to estimate potable water demands and evaluate system hydraulics are based on the design criteria used in the *One Scottsdale (Stacked 40s) Master Onsite Water Plan*. The design criteria used to estimate fire flow demands are based on the International Fire Code, 2015.
2. The water infrastructure described in the *One Scottsdale (Stacked 40s) Master Water Plan* is adequate to serve the domestic water demand requirements for the Site since the calculated demand for the Site improvements are less than the flows anticipated in the Master Report.
3. The proposed fire flow demand for the Site is greater than the anticipated fire flow demand from the *One Scottsdale (Stacked 40s) Master Water Plan*. However, the available fire flow of 3,743 gpm in the adjacent system, as calculated in the water model for the *One Scottsdale (Stacked 40s) Master Water Plan*, exceeds the proposed demand of 3,000 gpm for the Site. Therefore, it is anticipated that the system is adequate to serve the fire flow demands for the Site.

5.0 REFERENCES

1. *One Scottsdale (Stacked 40s) Master Onsite Water Plan, Wood, Patel & Associates, Inc. Revised January 28, 2016*
2. *International Fire Code, 2018*

APPENDIX A – WATER DEMAND CALCULATIONS



TABLE 1
WATER DEMAND DESIGN FLOWS

Project One Scottsdale - Lot 3
Location Scottsdale
Project Number 225336
Project Engineer John G. Ritchie, P.E.
References City of Scottsdale Design Standards & Policies Manual (2010)

PROPOSED SITE IMPROVEMENTS

Multi-Family Residential (DU)	gpd/DU	AVERAGE DAILY DEMAND		MAX DAY DEMAND		PEAK HOUR DEMAND		FIRE FLOW
		(gpd)	(gpm)	(gpd)	(gpm)	(gpd)	(gpm)	(gpm)
280	228	63,840	44	127,680	88	223,440	154	3,000

MASTER PLAN DEMAND CALCULATIONS - SUB AREA 4C

UNIT DAILY FLOW		AVERAGE DAILY DEMAND		MAX DAY DEMAND		PEAK HOUR DEMAND		FIRE FLOW
Multi-Family Residential (DU)	Multi-Family Residential (gpd/DU)	(gpd)	(gpm)	(gpd)	(gpm)	(gpd)	(gpm)	(gpm)
372	228	84,816	59	169,632	118	296,856	207	2,500

**APPENDIX B – MASTER REPORT CALCULATIONS RELEVANT TO ONE SCOTTSDALE – LOT
3 IMPROVEMENTS**

WOOD/PATEL

MODELED LAND USE CALCULATIONS

CIVIL ENGINEERS • HYDROLOGISTS • LAND SURVEYORS

Project: Master On-Site Water/Wastewater Plan
for One Scottsdale (Stacked 40s)
Location: Scottsdale, Arizona
Date: December 3, 2015

Proj Number: 154391
Proj Engineer: JGR

PLANNING UNIT II

PHASE 1						
PLANNING UNIT SUB-AREA	RESIDENTIAL (DUs)	COMMERCIAL			TOTAL COMMERCIAL AREA (SF)	HOTEL (ROOMS)
		OFFICE AREA (SF)	RETAIL AREA (SF)	RESTAURANT AREA (SF)		
1 (Henkel Building)	---	325,156	---	---	325,156	---
SUBTOTAL	---	325,156	---	---	325,156	---

PHASE 2						
PLANNING UNIT SUB-AREA	RESIDENTIAL (DUs)	COMMERCIAL			TOTAL COMMERCIAL AREA (SF)	HOTEL (ROOMS)
		OFFICE AREA (SF)	RETAIL AREA (SF)	RESTAURANT AREA (SF)		
2a	133	---	57,500	28,000	83,500	---
2b	266	---	28,831	---	28,831	---
2c	133	---	57,500	28,000	83,500	---
2d	266	---	28,831	---	28,831	---
SUBTOTAL	798	---	172,662	52,000	224,662	---

PHASE 3						
PLANNING UNIT SUB-AREA	RESIDENTIAL (DUs)	COMMERCIAL			TOTAL COMMERCIAL AREA (SF)	HOTEL (ROOMS)
		OFFICE AREA (SF)	RETAIL AREA (SF)	RESTAURANT AREA (SF)		
3a	---	246,800	2,500	5,000	254,300	140
3b	---	246,800	2,500	---	249,300	---
3c	---	190,100	2,500	---	192,600	---
3d	---	116,300	2,500	---	118,800	---
SUBTOTAL	---	800,000	10,000	5,000	815,000	140

PHASE 4						
PLANNING UNIT SUB-AREA	RESIDENTIAL (DUs)	COMMERCIAL			TOTAL COMMERCIAL AREA (SF)	HOTEL (ROOMS)
		OFFICE AREA (SF)	RETAIL AREA (SF)	RESTAURANT AREA (SF)		
4a	279	---	---	---	---	260
4b	267	---	---	8,000	8,000	---
4c	372	---	---	---	---	---
SUBTOTAL	918	---	---	8,000	8,000	260

PHASE 5						
PLANNING UNIT SUB-AREA	RESIDENTIAL (DUs)	COMMERCIAL			TOTAL COMMERCIAL AREA (SF)	HOTEL (ROOMS)
		OFFICE AREA (SF)	RETAIL AREA (SF)	RESTAURANT AREA (SF)		
5a	---	127,834	21,074	2,500	151,408	---
5b	---	204,533	15,332	2,500	222,365	---
5c	---	204,533	15,332	---	219,865	---
SUBTOTAL	---	536,900	51,738	5,000	593,638	---

PHASE 6						
PLANNING UNIT SUB-AREA	RESIDENTIAL (DUs)	COMMERCIAL			TOTAL COMMERCIAL AREA (SF)	HOTEL (ROOMS)
		OFFICE AREA (SF)	RETAIL AREA (SF)	RESTAURANT AREA (SF)		
6	---	197,089	---	---	197,089	---
SUBTOTAL	---	197,089	---	---	197,089	---

PLANNING UNIT II TOTAL 1,716 1,859,145 234,400 70,000 2,163,545 400

WOOD/PATEL

PROJECTED WATER DEMAND CALCULATIONS

CIVIL ENGINEERS * HYDROLOGISTS * LAND SURVEYORS

Project: Master On-Site Water/Wastewater Plan for One Scottsdale (Stacked 40s)
 Location: Scottsdale, Arizona
 Date: December 3, 2015

Proj. Number: 154391
 Proj. Engineer: JGR

PLANNING UNIT II

HYD. MODEL NODE	ELEVATION (FT)	PLANNING UNIT SUB-AREA	LAND USE TYPE										PROJECTED WATER DEMAND							
			RESIDENTIAL		COMMERCIAL					HOTEL			AVE. DAY DEMAND (GPD)	AVE. DAY DEMAND (GPM)	DEMAND ASSIGNED TO JUNCTIONS	MAX. DAY DEMAND (GPD) ¹	MAX. DAY DEMAND (GPM) ¹	PEAK HOUR DEMAND (GPM) ²	FIRE FLOW (GPM)	
			NO. OF DWELLING UNITS	ADF/DU (GPD) ²	OFFICE	RETAIL	RESTAURANT	TOTAL COMMERCIAL AREA (SF)	ROOMS	ADF/ROOM (GPD)	AREA (SF)	ADF/SF (GPD)								AREA (SF)
J-102-2	1.616	2c	133	228	---	6	57,500	.8	26,000	1.3	83,500	---	447	110,124	76	76	220,248	152	266	2,500
J-105-2	1.609	5a	---	228	127,834	6	21,074	.8	2,500	1.3	151,408	---	447	96,810	67	67	193,619	134	235	2,500
J-110-2	1.613	1	---	228	325,156	6	---	.8	0	1.3	325,156	---	447	195,094	135	231	390,187	270	473	2,500
J-120-2	1.612	5b	---	228	204,533	6	15,332	.8	2,500	1.3	222,365	---	447	138,235	96	94	276,471	192	336	2,500
J-120-2	1.612	5c	---	288	204,533	6	15,332	.8	0	1.3	219,865	---	447	134,985	94	94	269,971	188	329	2,500
J-130-2	1.613	6	---	228	197,089	6	---	.8	0	1.3	197,089	---	447	118,253	82	82	236,507	164	287	2,500
J-160-2	1.616	4c	372	228	---	6	---	.8	0	1.3	0	---	447	84,816	59	59	169,632	118	207	2,500
J-170-2	1.614	2d	266	228	---	6	28,831	.8	0	1.3	28,831	---	447	83,713	58	58	167,426	116	203	2,500
J-175-2	1.622	4b	267	228	---	6	---	.8	8,000	1.3	8,000	---	447	71,276	49	49	142,552	98	172	2,500
J-180-2	1.626	4a	279	228	---	6	---	.8	0	1.3	0	260	447	179,832	125	183	359,664	250	438	2,500
J-180-2	1.626	2b	266	229	---	6	28,831	.8	0	1.3	28,831	---	447	83,979	58	183	167,958	116	203	2,500
J-190-2	1.625	2a	133	228	---	6	57,500	.8	26,000	1.3	83,500	---	447	110,124	76	76	220,248	152	266	2,500
J-200-2	1.632	3a	---	228	246,800	6	2,500	.8	5,000	1.3	254,300	140	447	219,160	152	233	438,320	304	532	2,500
J-200-2	1.632	3c	---	228	190,100	6	2,500	.8	0	1.3	192,600	---	447	116,060	81	154	232,120	162	284	2,500
J-220-2	1.631	3b	---	228	246,800	6	2,500	.8	0	1.3	249,300	---	447	150,080	104	154	300,160	208	364	2,500
J-220-2	1.631	3d	---	228	116,300	6	2,500	.8	0	1.3	118,800	---	447	71,780	50	154	143,560	100	175	2,500
PLANNING UNIT II TOTAL			1,716		1,859,146		234,400		70,000		2,163,546	400		1,964,321	1,362	1,362	3,928,643	2,724	4,767	

Active Scenario: Maximum Day Plus Fire Flow - PU II

Fire Flow Node FlexTable: Fire Flow Report

Label	Zone	Satisfies Fire Flow Constraints?	Fire Flow (Needed) (gpm)	Fire Flow (Available) (gpm)	Pressure (Calculated Residual) (psi)	Pressure (Calculated Zone Lower Limit) (psi)
EX FH #1 - TEST HYDRANT	Zone	True	2,500	4,483	30	38
EX FH #2 - FLOW HYDRANT	Zone	True	2,500	4,982	30	32
J-10-EX	Zone	True	2,500	4,149	39	30
J-20-EX	Zone	True	2,500	4,125	36	30
J-30-EX	Zone	True	2,500	4,059	33	30
J-40-EX	Zone	True	2,500	4,015	32	30
J-50-EX	Zone	True	2,500	3,993	30	32
J-60-EX	Zone	True	2,500	5,096	36	30
J-70-EX	Zone	True	2,500	5,096	34	30
J-80-EX	Zone	True	2,500	5,096	31	30
J-90-EX	Zone	True	2,500	5,055	30	31
J-100-2	PU2	True	2,500	3,748	37	30
J-100-3	PU3	True	2,500	5,145	30	32
J-100-EX	Zone	True	2,500	5,096	31	30
J-101-2	PU2	True	2,500	3,668	31	30
J-102-2	PU2	True	2,500	3,903	37	30
J-105-2	PU2	True	2,500	3,887	39	30
J-105-EX	Zone	True	2,500	5,096	33	30
J-110-2	PU2	True	2,500	4,214	35	30
J-110-3	PU3	True	2,500	5,239	34	30
J-110-EX	Zone	True	2,500	5,096	34	30
J-111-2	PU2	True	2,500	3,654	30	31
J-120-2	PU2	True	2,500	3,940	35	30
J-120-3	PU3	True	2,500	5,238	33	30
J-120-EX	Zone	True	2,500	5,096	40	30
J-121-2	PU2	True	2,500	3,784	30	30
J-125-EX	Zone	True	2,500	5,096	43	30
J-130-2	PU2	True	2,500	3,913	34	30
J-130-3	PU3	True	2,500	5,230	33	30
J-130-EX	Zone	True	2,500	3,551	30	51
J-135-3	PU3	True	2,500	5,178	30	30
J-140-3	PU3	True	2,500	5,163	30	31
J-150-2	PU2	True	2,500	3,749	33	30
J-150-3	PU3	True	2,500	5,070	30	30
J-150-EX	Zone	True	2,500	5,547	30	32
J-160-2	PU2	True	2,500	3,864	33	30
J-160-3	PU3	True	2,500	5,029	30	32
J-160-EX	Zone	True	2,500	5,064	39	30
J-165-2	PU2	True	2,500	3,743	36	30
J-170-2	PU2	True	2,500	3,863	37	30
J-170-3	PU3	True	2,500	4,775	30	33
J-170-EX	Zone	True	2,500	4,282	49	30
J-175-2	PU2	True	2,500	3,837	34	30
J-180-2	PU2	True	2,500	4,108	33	30

Active Scenario: Maximum Day Plus Fire Flow - PU II

Fire Flow Node FlexTable: Fire Flow Report

Label	Zone	Satisfies Fire Flow Constraints?	Fire Flow (Needed) (gpm)	Fire Flow (Available) (gpm)	Pressure (Calculated Residual) (psi)	Pressure (Calculated Zone Lower Limit) (psi)
J-180-3	PU3	True	2,500	4,329	30	44
J-190-2	PU2	True	2,500	3,877	33	30
J-190-3	PU3	True	2,500	4,892	30	34
J-200-2	PU2	True	2,500	4,174	30	30
J-200-3	PU3	True	2,500	4,692	30	40
J-210-3	PU3	True	2,500	4,525	30	40
J-220-2	PU2	True	2,500	4,074	31	30
J-220-3	PU3	True	2,500	4,898	30	31
J-230-3	PU3	True	2,500	4,776	30	30
J-235-3	PU3	True	2,500	3,905	30	46
J-240-3	PU3	True	2,500	4,997	30	32
J-245-3	PU3	True	2,500	4,961	30	33
J-250-3	PU3	True	2,500	4,336	30	35
J-260-3	PU3	True	2,500	4,227	30	39
J-265-3	PU3	True	2,500	4,772	30	34
J-270-3	PU3	True	2,500	5,246	35	30
J-290-3	PU3	True	2,500	4,997	30	32
J-300-3	PU3	True	2,500	4,538	30	33
J-310-3	PU3	True	2,500	4,435	30	38
J-320-3	PU3	True	2,500	5,071	30	32
J-330-3	PU3	True	2,500	3,748	30	54

**APPENDIX C – APPROVED MASTER ON-SITE WATER PLAN FOR ONE SCOTTSDALE
(STACKED 40S) BY WOOD, PATEL & ASSOCIATES, INC., REVISED
JANUARY 28, 2016**

Appendix C - For Reference Only



Accepted For:
City of Scottsdale
Water Resources Department
9379 E. San Salvador
Scottsdale, Arizona

By: Doug Mann
Date: 3.3.2016

20-ZN-2002#3
2/12/2016

WOOD/PATEL
MISSION: CLIENT SERVICE™

30-DR-2021#3
8/12/2022

Appendix C - For Reference Only


**ONE SCOTTSDALE
(Stacked 40s)
MASTER ON-SITE WATER PLAN**

Revised January 28, 2016
Revised February 10, 2012
Revised April 16, 2009
August 25, 2005
WP# 154391

Submitted to: **City of Scottsdale**
7447 East Indian School Road
Suite 205
Scottsdale, AZ 85251

Prepared for: **One Scottsdale Holdings, LLC**
7600 East Doubletree Ranch Road
Suite 300
Scottsdale, AZ 85258
Phone: (480) 367-7000
Fax: (480) 367-9788
Contact: Mr. Michael Burke

Prepared by: **Wood, Patel & Associates, Inc.**
2051 West Northern Avenue
Suite 100
Phoenix, AZ 85021
Phone: (602) 335-8500
Fax: (602) 335-8580
Contact: Mr. Darin L. Moore, P.E.

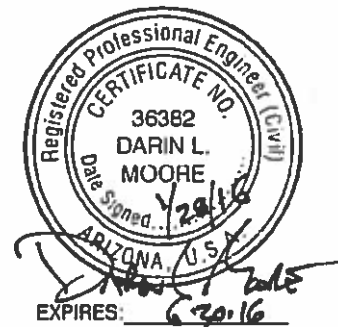

WOOD/PATEL
MISSION: CLIENT SERVICE[®]

Appendix C - For Reference Only

TABLE OF CONTENTS

1.0	INTRODUCTION.....	1
1.1	General Background.....	1
1.2	Study Area and Planning Units.....	2
1.3	Build-Out Condition.....	4
1.4	Construction Phasing.....	4
2.0	EXISTING CONDITIONS.....	5
2.1	Topographic Conditions.....	5
2.2	Existing Water Infrastructure.....	5
3.0	DESIGN CRITERIA AND PROJECTED WATER DEMANDS.....	6
3.1	Design Criteria.....	6
3.2	Projected Onsite Water Demands.....	6
3.3	Demands to Offsite Infrastructure.....	7
4.0	HYDRAULIC MODEL.....	8
4.1	Methodology.....	8
4.2	Pressure Reducing Valves.....	8
4.3	Hydraulic Modeling Results.....	9
4.4	Water Pressures in Multi-Story Buildings.....	9
4.5	Preliminary Piping Layout.....	10
4.6	Legacy Boulevard (Center Drive).....	10
5.0	CONCLUSIONS.....	11



You don't discuss well 33!
 Site to be protected in place and any
 modifications subject to City Approval.

TABLES

TABLE 1.1	Land Use Budget.....	3
TABLE 1.2	Conceptual Planning Areas.....	3
TABLE 3.1	Projected Water Demands.....	6

Appendix C - For Reference Only

APPENDICES

APPENDIX A	Modeled Land Use Calculations
APPENDIX B	Projected Water Demand Calculations Modeled PRV Status
APPENDIX C	Hydraulic Modeling Results
APPENDIX D	Fire Hydrant Flow Test Results

PLATES

PLATE 1	Vicinity Map
PLATE 2	Modeled On-Site Land Use Plan
PLATE 3	Master On-Site Water Plan Exhibit



Appendix C - For Reference Only

1.0 INTRODUCTION

1.1 General Background

This plan has been prepared in accordance with Wood, Patel & Associates, Inc.'s (Wood/Patel) understanding of City of Scottsdale technical requirements for potable-water systems and our understanding of the Master Water Plan submission requirements as defined in the November 19, 2002 Development Agreement No. 2002-142-COS, between the Corrigan Land & Livestock Company, LLC, Corrigan Real Estate Investment, LLC, DMB Stacked 40s LLC, and the City of Scottsdale (Development Agreement), for the approximate 160-acre (gross) parcel of land formerly known as the Stacked 40s, currently known as One Scottsdale.

One Scottsdale is located at the northeast corner of Scottsdale Road and Union Hills Drive; south of Thompson Peak Parkway and east of Scottsdale Road. It is dissected by the Arizona Department of Transportation (ADOT) State Route 101 Freeway, and bound on the north by the Grayhawk Master Planned Community (hereafter referred to as Grayhawk), and on the east by both Grayhawk and Arizona State Trust Land. Specifically, One Scottsdale is located in the west half of Section 26, Township 4 North, Range 4 East of the Gila and Salt River Meridian. Plate 1 – *Vicinity Map* displays its specific location. Center Drive is now called Legacy Boulevard.

One Scottsdale will be developed on approximately 120 acres north of the State Route 101 Freeway, hereinafter referred to as the Project Area, and is anticipated to be a phased mixed-use development that may include single-family residential, multi-family residential, hotel, mixed-use office, retail, and commercial uses as applicable per the Development Agreement. Approximate acreage for each phase is delineated as below:

Phase 1: 64.2 AC

Phase 2: 56.7 AC

Phase 3 (South of 101): 18.9 AC

For the purposes of this plan, the scope of work per the Development Agreement stipulations is included as follows:

Appendix C - For Reference Only

1. *MASTER WATER PLAN. A Master Water Plan shall be prepared in accordance with the City's design procedures and criteria by a registered engineer who is licensed in the State of Arizona. The plan shall conform to the draft Water and Wastewater Report Guidelines available through the City Water Resources Department. The Master Water Plan shall include:*
 - a. *A description of water system requirements for the Planning Unit and the phasing of such requirements.*
 - b. *A discussion of the timing of and parties responsible for construction of all water facilities.*
 - c. *The conceptual location and size of all necessary water system components, including both on and off-site lines, pump stations and storage facilities needed to serve the development on the existing system with water demand generation factors based on land use.*
 - d. *A flow and pressure analysis of the proposed system that includes a simulation of the system operation for each pressure zone within the development using a computer model with average day demands, maximum day demands with estimated required fire flow and any requirements to meet the then current City standards, maximum day demands with reservoir tanks closed, and peak hour demands.*
 - e. *Compliance with the adopted City's Integrated Water Master Plan.*
 - f. *A preliminary plan of the Planning Unit showing development sites and right-of-ways, contours and benchmarks, existing utilities and fire hydrants within 400 feet of the proposed development, any features such as watercourses and drainage facilities that may influence the location of underground utilities, a general layout of the proposed water main, and any required water facilities.*
2. *MASTER WATER PLAN APPROVAL. Before the application of any basis of design reports to the Plan Review and Permit Services Division, the Master Developer shall have obtained approval from the City Water Resources Department of the Master Water Plan.*

The intent of this Master Plan revision is to support a proposed amendment to the One Scottsdale zoning. Refer to Section 1.2, Table 1.2 for the revised Conceptual Planning Areas land use budget.

1.2 Study Area and Planning Units

One Scottsdale is further described as containing "Planning Unit I", "Planning Unit II" and "Planning Unit III" as shown in Plate 2 – *Modeled On-Site Land Use Plan*. The scope of this Master Water Plan includes the Project Area consisting of "Planning Unit II" and "Planning Unit III". Mr. John R. Lund and the City of Scottsdale are parties to a

Appendix C - For Reference Only

separate Development Agreement, Agreement Number 2002-143-COS, relating to the development of the South Parcel also known as Planning Unit I.

Therefore, the Stacked 40s Development Agreement (Number 2002-142-COS) shall no longer apply to the South Parcel (also known as Planning Unit I) upon the effective date of Agreement Number 2002-143-COS.

Both the original and proposed land used totals for the Stacked 40s are provided below in Table 1.1 – *Land Use Budget*.

**Table 1.1:
Land Use Budget**

Category	Zoning	Permitted Uses Within Planning Units		Original Total Allowed	Proposed Total Allowed ¹
		II	III		
Residential ²	PRC PCD	X	X	1,100 Units	2,466 Units
Commercial / Retail / Office	PRC PCD	X	X	1,800,000 SF	2,848,145 SF
Hotel	PRC PCD	X	X	400 Rooms	400 Rooms

Notes:

1. Source: Schedule C, Stacked 40s Land Use Budget, Development Agreement, amended December 2015
2. A maximum of 750 residential units within Planning Unit III.

According to the Development Agreement, the approved Development Plan for the Project Area is on file with the Planning and Development Services Department at the City of Scottsdale. The two (2) proposed Planning Unit locations are as follows: Planning Unit II will extend north from the State Route 101 Freeway to Legacy Boulevard, and Planning Unit III will extend north from Legacy Boulevard to Thompson Peak Parkway. A summary of proposed planning areas designated for development within the Project Area is provided in Table 1.2 – *Conceptual Planning Areas*. Refer Appendix A – *Modeled Land Use Calculations* for additional information.

Appendix C - For Reference Only

**Table 1.2:
Conceptual Planning Areas¹**

Area	Number of Residential Dwelling Units	Commercial				Hotel (Rooms)
		Office (Sq. Ft.)	Retail (Sq. Ft.)	Restaurant (Sq. Ft.)	Total (Sq. Ft.)	
PU II	1,716	1,859,145	234,400	70,000	2,163,545	400
PU III	750	637,100	35,500	30,000	702,600	
Total	2,466	2,496,245	269,900	100,000	2,866,145	400

Notes:

1. Source: Client-furnished December 2015 land plan for modeling purposes.

1.3 Build-Out Condition

The design criteria utilized to project water demands and to evaluate the system hydraulics for the Project Area are based on the maximum number of residences, hotel rooms and square footage of commercial uses allowed. Significant changes in land use and/or projected water demands may require an amendment to the Master Plan and/or review and re-approval by the City of Scottsdale. All water and sanitary sewer lines within the Project Area will be constructed by the owner/developer.

1.4 Construction Phasing

It is anticipated that Planning Units II and III will be constructed in several phases. Refer to Plate 2 for a phasing breakdown of Planning Units II and III. On-site waterline construction will generally coincide with the development phasing, with adequate looping provided to serve each phase, to be demonstrated by hydraulic modeling results submitted with future basis-of-design (BOD) reports for individual phases.

2.0 EXISTING CONDITIONS

2.1 Topographic Conditions

Currently, the Project Area consists of a mass graded condition for both Planning Units II and III. The Henkel development and associated infrastructure in the southern portion of Planning Unit II is built, along with the Legacy Boulevard improvements that dissect the area. The land generally slopes in a southerly direction at an approximate slope of 1.5 percent from Thompson Peak Parkway to ADOT State Route 101 Freeway. The peak elevation within the area is approximately 1,669 feet, located near Thompson Peak Parkway. The lowest elevation within the Project Area is approximately 1,608 feet near the intersection of Scottsdale Road and State Route 101. The Project Area lies within City of Scottsdale Pressure Zones 4E and 5, according to the City of Scottsdale Design Standards and Policy Manual.

2.2 Existing Water Infrastructure

Potable water for the Project Area will be supplied by the City of Scottsdale. According to City of Scottsdale staff, the hydraulic grade lines (HGLs) of the existing potable-water system in the area are approximately 1,764 feet and 1,910 feet for Pressure Zones 4 and 5, respectively. Results from a recent fire hydrant flow test conducted by Arizona Flow Testing, LLC on October 30, 2015 indicate an HGL of approximately 1,854 feet for Pressure Zone 5 (refer to Appendix D - *Fire Hydrant Flow Test Results*). The lower Zone 5 HGL was utilized for modeling purposes. Existing water infrastructure in the area includes:

- ✓ ▪ 16-inch potable waterline located along Scottsdale Road, between Union Hills Drive and Legacy Boulevard
- ✓ ▪ 12-inch potable waterline located along Scottsdale Road, between Legacy Boulevard and Thompson Peak Parkway
- ✓ ▪ 16-inch potable waterline in Legacy Boulevard, between Scottsdale Road and Hayden Road
- ✓ ▪ 16-inch potable waterline along Hayden Road, between Union Hills Drive and Thompson Peak Parkway
- ✓ ▪ 24-inch waterline in the Legacy Boulevard alignment, from Hayden Road to the power line corridor
- ✓ ▪ 12-inch potable waterline located along Thompson Peak Parkway
- ✓ ▪ 16-inch potable waterline located along Union Hills Road
- ✓ ▪ 2 pressure-reducing valve (PRV) stations were recently located within Scottsdale Road north of Legacy Boulevard near the Zone 4E / Zone 5 pressure-zone boundary, and 73rd Street north of Legacy. *and 1 At Hayden + Legacy*

Please refer to Plate 3 for additional information regarding existing water infrastructure.

Appendix C - For Reference Only

3.0 DESIGN CRITERIA AND PROJECTED WATER DEMANDS

3.1 Design Criteria

The design criteria used to estimate water demands and evaluate system hydraulics are based on Wood/Patel's understanding of the requirements listed in the *City of Scottsdale Design Standards and Policies Manual*. The following is a summary of the primary design criteria utilized:

- Average-Day Water Demand, Residential (8-22 DU/acre): 228 gpd/DU
- Average-Day Water Demand, Retail: 0.80 gpd/SF
- Average-Day Water Demand, Restaurant: 1.3 gpd/SF
- Average-Day Water Demand, Office: 0.60 gpd/SF
- Average-Day Water Demand, Hotel: 447 gpd/Room
- Fire Flow Requirements (used for all areas): 2,500 gpm
- Maximum-Day Demand: 2.0 x Ave. Day Demand
- Peak-Hour Demand: 3.5 x Ave. Day Demand
- Offsite Average-Day Water Demand*: 1,851 gpd/ac
- Offsite Maximum-Day Demand*: 2,499 gpd/ac
- F.A.R. Peaking Factor*: 4 x Ave. Day Demand
- Minimum Residual Pressure, Peak Hour: 50 psi
- Minimum Residual Pressure, Max. Day + Fire Flow: 30 psi
- Maximum System Pressure: 120 psi
- Maximum Pipe Head Loss, Max. Day Demand: 8 ft / 1,000 ft
- Maximum Pipe Head Loss, Peak Hour Demand: 10 ft / 1,000 ft
- Minimum Pipe Diameter: 8 inches

Abbreviations: gpd = gallons per day; DU = dwelling unit; SF = square feet, psi = pounds per sq. inch;
 Ave. = average; gpm = gallons per minute
 *Based on the City of Scottsdale Water Masterplan Update (2015)

3.2 Projected Onsite Water Demands

Projected water demands were calculated using design criteria listed in Section 3.1, and are summarized in Table 3.1 below.

Table 3.1:
Projected Onsite Water Demands

DS+PM

	Average-Day Demand		Maximum- Day Demand		Peak-Hour Demand
	GPD	GPM	GPD	GPM	GPM
Planning Unit II	1,964,321	1,362	3,928,643	2,724	4,767
Planning Unit III	449,660	312	899,320	624	1,092
Total	2,413,981	1,674	4,827,963	3,348	5,859

The water demands listed include projected landscape water use. Refer to Appendix B – *Projected Water Demand Calculations* for detailed water use projections.

Appendix C - For Reference Only

3.3 Demands to Offsite Infrastructure

In addition to calculating Projected Water Demands for onsite water system analysis, the offsite water system demands were also calculated utilizing information from the 2015 City of Scottsdale Water Master Plan update. The projected offsite demands are summarized below. See Appendix B for detailed Offsite Water Design Flow calculations.

Table 3.2:
Projected Offsite Water Demand

PHASE	Average-Day Demand		Maximum- Day Demand		Peak Demand
	GPD	GPM	GPD	GPM	GPM
Planning Unit II	118,834	82.5	160,436	111.4	330
Planning Unit III	104,952	72.9	141,693	98.4	292
Total	223,786	155	302,129	210	622

Not shown

Master plan demands

MAXday
Mixed use central

$$64.2 \text{ ac } 2499 \text{ gpa/d} = 160,436$$

$$56.7 \text{ ac } 2499 \text{ gpa/d} = 141,693$$

622 MP value
vs 5859 IDSTPM value
9.4 factor

210 MP
vs 3348 IDSTPM
15.9 factor

Appendix C - For Reference Only

4.0 HYDRAULIC MODEL

4.1 Methodology

WaterCAD Version 7.0, by Haestad Methods, was utilized to analyze the proposed potable water system. As discussed in section 2.2, a hydraulic grade line (HGL) of 1,764 feet was used to simulate the City of Scottsdale (COS) water-supply for Pressure Zone 4E based on information provided by the City of Scottsdale staff. Results from a fire hydrant flow test conducted on October 30, 2015 by Arizona Flow Testing, LLC., were used to model the COS Pressure Zone 5 water-supply (refer to Appendix D – *Fire Hydrant Flow Test Results*). The hydraulic grade lines shown below represent the maximum hydraulic grade in each specified zone during the Average-Day, Max-Day and Peak-Hour scenarios. Refer to the junction tables for the Planning Unit II and Planning Unit III scenarios in Appendix C.

	<u>Zone 4E</u>	<u>Zone 5</u>
• Project Area Average-Day Demand HGL (Feet):	1,761	1,854
• Project Area Maximum-Day Demand HGL (Feet):	1,755	1,851
• Project Area Peak-Hour Demand HGL (Feet):	1,755	1,816

Water demands and peaking factors described in Sections 3.1 and 3.2 were applied to the hydraulic model. Pipes were sized in accordance with design criteria listed in Section 3.1.

4.2 Pressure Reducing Valves

Pressure reducing valves (PRV) were placed in the hydraulic model north of Legacy Boulevard to separate Pressure Zones 4E and 5. The locations of existing PRV-3 and proposed PRV-4, as shown in Plate 3 were chosen to provide adequate pressures in the model and to balance the amount of water supplied from the two (2) pressure zones to the area.

o/c
The original design intent included providing a potable-water system that would serve the area within a single pressure zone. Locating the PRVs farther north in the hydraulic model, near Thompson Peak Parkway, resulted in low pressures on the Zone 4E-supply side, with the vast majority of water supply coming from the Zone 5 booster pump station, potentially exceeding the capacity of the existing off-site waterlines and using virtually no water from Zone 4E.

Appendix C - For Reference Only

4.3 Hydraulic Modeling Results

The hydraulic-modeling results indicate that the system is capable of delivering peak-hour demands as follows:

Planning Unit(s)	Demand (gpm)	Residual Pressure Range (psi)*
II	4,767	40 to 52**
II & III	5,859	50 to 70

* Includes junctions within the Stacked 40s (One Scottsdale).

** Proposed piping within Planning Unit III was not utilized for this modeling scenario. The hydraulic model indicates that portions of Planning Unit II may have peak-hour pressures below the 50 psi standard until the Planning Unit III water system is placed in service.

During previous discussions with City of Scottsdale staff, there was concern regarding the ability of the existing 12-inch waterline located along Scottsdale Road, between Legacy Boulevard and Thompson Peak Parkway to serve the area north of Legacy Boulevard. According to the hydraulic modeling results, this existing waterline does not appear to restrict the available capacity required for Planning Unit III. System pressures are anticipated to increase when Planning Unit III is constructed, due to the additional waterline looping provided. Please refer to Plate 3. Water customers near the PRVs may need to install individual pressure regulators due to pressures above 80 psi.

Fire-flow results from the model indicate that a fire flow of 2,500 gpm can be provided during Maximum-Day Demand, while maintaining residual pressures greater than 30 psi. Hydraulic-modeling results, calculations and exhibits involved in the water system analysis are provided in the attached Appendices and Plates.

4.4 Water Pressures in Multi-Story Buildings

Since there is potential for multi-story buildings to be constructed within the Project Area, projected water pressures were analyzed using a modeling scenario with junction elevations 60 feet above existing grade. The hydraulic modeling results indicated that, in general, multi-story buildings within Planning Units II and III may not have water pressures above 50 psi during Peak-Hour demand periods.

If it is found necessary to increase water pressures in upper building levels, private booster pump systems, including fire pumps designed to serve individual buildings, or other provisions as directed by the City may be required. Available fire flows at ground level are adequate throughout the Project Area according to the hydraulic model.

Appendix C - For Reference Only

4.5 Preliminary Piping Layout

Potable water service and fire protection for the Project Area will be provided through proposed 8-inch, 12-inch, and 16-inch looped public water lines. Waterline connections are proposed to the existing 12-inch and 16-inch public waterlines located along Scottsdale Road, and the existing 12-inch waterline located along Thompson Peak Parkway.

4.6 Legacy Boulevard (Center Drive)

Center Drive is now called Legacy Boulevard. It is our understanding that the managing partner of One Scottsdale (Stacked 40s) enabled Legacy Boulevard, through the Site, to be constructed to coincide with the adjoining City of Scottsdale sponsored Legacy Boulevard. At this time, Legacy Boulevard (a public roadway) has been constructed and is in use by the general public.

Appendix C - For Reference Only

5.0 CONCLUSIONS

The One Scottsdale (Stacked 40s) Master On-Site Water Plan revised January 28, 2015, as presented, is believed to meet City of Scottsdale standards and requirements. It is intended to serve as a guide for construction documents associated with the proposed potable-water systems. No critical issues were identified that would prevent the anticipated outcome as presented in this Plan. The following highlights critical conclusions:

1. Planning Units II and III's on-site potable-water system is capable of being designed in general accordance with the City of Scottsdale's current water-system design criteria.
2. Wood/Patel believes that the modeled on-site water system will provide necessary system pressures, water supply and fire flows within the previously-defined design criteria throughout the skeleton water system, according to hydraulic modeling results contained in this plan.
3. Certain on-site multi-story buildings may need individual, private booster pump systems to meet domestic water and/or fire protection needs for upper building levels.
4. Wood/Patel is not aware of any discrepancies related to compliance of this report with the adopted *City of Scottsdale Integrated Water Master Plan*.
5. The One Scottsdale (Stacked 40s) Master On-Site Water Plan dated January 28, 2015, prepared by Wood/Patel demonstrates the adequacy of the proposed on-site water distribution system to serve the proposed Planning Units II and III.
6. Basis of Design Reports are required for each phase of development within Planning Units II and III to demonstrate compliance with this Master Plan.

Appendix C - For Reference Only

APPENDIX A

MODELED LAND USE CALCULATIONS

Appendix C - For Reference Only

WOOD/PATEL

MODELED LAND USE CALCULATIONS

CIVIL ENGINEERS • HYDROLOGISTS • LAND SURVEYORS

Project: Master On-Site Water/Wastewater Plan
for One Scottsdale (Stacked 40s)
Location: Scottsdale, Arizona
Date: December 3, 2015

Proj Number: 154391
Proj Engineer: JGR

PLANNING UNIT II

PHASE 1						
PLANNING UNIT SUB-AREA	RESIDENTIAL (DUs)	COMMERCIAL			TOTAL COMMERCIAL AREA (SF)	HOTEL (ROOMS)
		OFFICE AREA (SF)	RETAIL AREA (SF)	RESTAURANT AREA (SF)		
1 (Henkel Building)	---	325,156	---	---	325,156	---
SUBTOTAL	---	325,156	---	---	325,156	---

PHASE 2						
PLANNING UNIT SUB-AREA	RESIDENTIAL (DUs)	COMMERCIAL			TOTAL COMMERCIAL AREA (SF)	HOTEL (ROOMS)
		OFFICE AREA (SF)	RETAIL AREA (SF)	RESTAURANT AREA (SF)		
2a	133	---	57,500	28,000	83,500	---
2b	266	---	28,831	---	28,831	---
2c	133	---	57,500	28,000	83,500	---
2d	266	---	28,831	---	28,831	---
SUBTOTAL	798	---	172,662	52,000	224,662	---

PHASE 3						
PLANNING UNIT SUB-AREA	RESIDENTIAL (DUs)	COMMERCIAL			TOTAL COMMERCIAL AREA (SF)	HOTEL (ROOMS)
		OFFICE AREA (SF)	RETAIL AREA (SF)	RESTAURANT AREA (SF)		
3a	---	246,800	2,500	5,000	254,300	140
3b	---	246,800	2,500	---	249,300	---
3c	---	190,100	2,500	---	192,600	---
3d	---	116,300	2,500	---	118,800	---
SUBTOTAL	---	800,000	10,000	5,000	815,000	140

PHASE 4						
PLANNING UNIT SUB-AREA	RESIDENTIAL (DUs)	COMMERCIAL			TOTAL COMMERCIAL AREA (SF)	HOTEL (ROOMS)
		OFFICE AREA (SF)	RETAIL AREA (SF)	RESTAURANT AREA (SF)		
4a	279	---	---	---	---	260
4b	267	---	---	8,000	8,000	---
4c	372	---	---	---	---	---
SUBTOTAL	918	---	---	8,000	8,000	260

PHASE 5						
PLANNING UNIT SUB-AREA	RESIDENTIAL (DUs)	COMMERCIAL			TOTAL COMMERCIAL AREA (SF)	HOTEL (ROOMS)
		OFFICE AREA (SF)	RETAIL AREA (SF)	RESTAURANT AREA (SF)		
5a	---	127,834	21,074	2,500	151,408	---
5b	---	204,533	15,332	2,500	222,365	---
5c	---	204,533	15,332	---	219,865	---
SUBTOTAL	---	536,900	51,738	5,000	593,638	---

PHASE 6						
PLANNING UNIT SUB-AREA	RESIDENTIAL (DUs)	COMMERCIAL			TOTAL COMMERCIAL AREA (SF)	HOTEL (ROOMS)
		OFFICE AREA (SF)	RETAIL AREA (SF)	RESTAURANT AREA (SF)		
6	---	197,089	---	---	197,089	---
SUBTOTAL	---	197,089	---	---	197,089	---

PLANNING UNIT II TOTAL **1,716** **1,859,145** **234,400** **70,000** **2,163,545** **400**

Appendix C - For Reference Only

WOOD/PATEL

MODELED LAND USE CALCULATIONS

CIVIL ENGINEERS • HYDROLOGISTS • LAND SURVEYORS

Project: Master On-Site Water/Wastewater Plan
for One Scottsdale (Stacked 40s)
Location: Scottsdale, Arizona
Date: December 3, 2015

Proj Number: 154391
Proj Engineer: JGR

PLANNING UNIT III

PHASE 1						
PLANNING UNIT SUB-AREA	RESIDENTIAL (DUs)	COMMERCIAL				HOTEL (ROOMS)
		OFFICE AREA (SF)	RETAIL AREA (SF)	RESTAURANT AREA (SF)	TOTAL COMMERCIAL AREA (SF)	
1	388	---	---	---	---	---
SUBTOTAL	388	---	---	---	---	---

PHASE 2						
PLANNING UNIT SUB-AREA	RESIDENTIAL (DUs)	COMMERCIAL				HOTEL (ROOMS)
		OFFICE AREA (SF)	RETAIL AREA (SF)	RESTAURANT AREA (SF)	TOTAL COMMERCIAL AREA (SF)	
2	362	---	---	---	---	---
SUBTOTAL	362	---	---	---	---	---

PHASE 3						
PLANNING UNIT SUB-AREA	RESIDENTIAL (DUs)	COMMERCIAL				HOTEL (ROOMS)
		OFFICE AREA (SF)	RETAIL AREA (SF)	RESTAURANT AREA (SF)	TOTAL COMMERCIAL AREA (SF)	
3a	---	159,275	17,750	15,000	192,025	---
3b	---	159,275	17,750	---	177,025	---
3c	---	159,275	---	15,000	174,275	---
3d	---	159,275	---	---	159,275	---
SUBTOTAL	---	637,100	35,500	30,000	702,600	---

PLANNING UNIT III TOTAL **750** **637,100** **35,500** **30,000** **702,600** **---**

FULL BUILDOUT TOTAL	2,466	2,496,246	269,900	100,000	2,866,146	400
----------------------------	--------------	------------------	----------------	----------------	------------------	------------

Appendix C - For Reference Only

APPENDIX B

**PROJECTED WATER DEMAND CALCULATIONS
MODELED PRV STATUS**

Appendix C - For Reference Only

WOOD/PATEL

PROJECTED WATER DEMAND CALCULATIONS

CIVIL ENGINEERS * HYDROLOGISTS * LAND SURVEYORS

Project: Master On-Site Water/Wastewater Plan for One Scottsdale (Stacked 40s)
 Location: Scottsdale, Arizona
 Date: December 3, 2015

Proj. Number: 154391
 Proj. Engineer: JGR

PLANNING UNIT II

HYD. MODEL NODE	ELEVATION (FT)	PLANNING UNIT SUB-AREA	LAND USE TYPE										PROJECTED WATER DEMAND							
			RESIDENTIAL		COMMERCIAL				HOTEL		AVE. DAY DEMAND (GPD)	AVE. DAY DEMAND (GPM)	DEMAND ASSIGNED TO JUNCTIONS	MAX. DAY DEMAND (GPD) ¹	MAX. DAY DEMAND (GPM) ¹	PEAK HOUR DEMAND (GPM) ²	FIRE FLOW (GPM)			
			NO. OF DWELLING UNITS	ADF/DU (GPD) ²	OFFICE	RETAIL	RESTAURANT	TOTAL COMMERCIAL AREA (SF)	ROOMS	ADF/ROOM (GPD)										
AREA (SF)	ADF/SF (GPD)	AREA (SF)	ADF/SF (GPD)	AREA (SF)	ADF/SF (GPD)	ROOMS	ADF/ROOM (GPD)	AVE. DAY DEMAND (GPD)	AVE. DAY DEMAND (GPM)	DEMAND ASSIGNED TO JUNCTIONS	MAX. DAY DEMAND (GPD) ¹	MAX. DAY DEMAND (GPM) ¹	PEAK HOUR DEMAND (GPM) ²	FIRE FLOW (GPM)						
J-102-2	1.616	2c	133	228	---	6	57,500	8	26,000	1.3	83,500	---	447	110,124	76	76	220,248	152	266	2,500
J-105-2	1.609	5a	---	228	127,834	6	21,074	8	2,500	1.3	151,408	---	447	96,810	67	67	193,619	134	235	2,500
J-110-2	1.613	1	---	228	325,156	6	---	8	0	1.3	325,156	---	447	195,094	135	231	390,187	270	473	2,500
J-120-2	1.612	5b	---	228	204,533	6	15,332	8	2,500	1.3	222,365	---	447	138,235	96	94	276,471	192	336	2,500
J-120-2	1.612	5c	---	288	204,533	6	15,332	8	0	1.3	219,865	---	447	134,985	94	94	269,971	188	329	2,500
J-130-2	1.613	6	---	228	197,089	6	---	8	0	1.3	197,089	---	447	118,253	82	82	236,507	164	287	2,500
J-160-2	1.616	4c	372	228	---	6	---	8	0	1.3	0	---	447	84,816	59	59	169,632	118	207	2,500
J-170-2	1.614	2d	266	228	---	6	28,831	8	0	1.3	28,831	---	447	83,713	58	58	167,426	116	203	2,500
J-175-2	1.622	4b	267	228	---	6	---	8	8,000	1.3	8,000	---	447	71,276	49	49	142,552	98	172	2,500
J-180-2	1.626	4a	279	228	---	6	---	8	0	1.3	0	260	447	179,832	125	183	359,664	250	438	2,500
J-180-2	1.626	2b	266	229	---	6	28,831	8	0	1.3	28,831	---	447	83,979	58	183	167,958	116	203	2,500
J-190-2	1.625	2a	133	228	---	6	57,500	8	26,000	1.3	83,500	---	447	110,124	76	76	220,248	152	266	2,500
J-200-2	1.632	3a	---	228	246,800	6	2,500	8	5,000	1.3	254,300	140	447	219,160	152	233	438,320	304	532	2,500
J-200-2	1.632	3c	---	228	190,100	6	2,500	8	0	1.3	192,600	---	447	116,060	81	233	232,120	162	284	2,500
J-220-2	1.631	3b	---	228	246,800	6	2,500	8	0	1.3	249,300	---	447	150,080	104	154	300,160	208	364	2,500
J-220-2	1.631	3d	---	228	116,300	6	2,500	8	0	1.3	118,800	---	447	71,780	50	154	143,560	100	175	2,500
PLANNING UNIT II TOTAL			1,716		1,859,146		234,400		70,000		2,163,546	400		1,964,321	1,362	1,362	3,928,643	2,724	4,767	

Appendix C - For Reference Only

WOOD/PATEL

PROJECTED WATER DEMAND CALCULATIONS

CIVIL ENGINEERS * HYDROLOGISTS * LAND SURVEYORS

Project: Master On-Site Water/Wastewater Plan for One Scottsdale (Stacked 40s)
 Location: Scottsdale, Arizona
 Date: December 3, 2015

Proj. Number: 154391
 Proj. Engineer: JGR

PLANNING UNIT III

HYD. MODEL NODE	ELEVATION (FT)	PLANNING UNIT SUB-AREA	LAND USE TYPE											PROJECTED WATER DEMAND						
			RESIDENTIAL		OFFICE		RETAIL		RESTAURANT		TOTAL COMMERCIAL AREA (SF)	HOTEL		AVE. DAY DEMAND (GPD)	AVE. DAY DEMAND (GPM)	DEMAND ASSIGNED TO JUNCTIONS	MAX. DAY DEMAND (GPD) ¹	MAX. DAY DEMAND (GPM) ¹	PEAK HOUR DEMAND (GPM) ²	FIRE FLOW (GPM)
			NO. OF DWELLING UNITS	ADF/DU (GPD) ³	AREA (SF)	ADF/SF (GPD)	AREA (SF)	ADF/SF (GPD)	AREA (SF)	ADF/SF (GPD)		ROOMS	ADF/ROOM (GPD)							
J-270-3	1.642	3d	---	228	159,275	6	---	.8	---	1.3	159,275	---	447	95,565	66	66	191,130	132	231	2,500
J-300-3	1.653	3b	---	228	159,275	6	17,750	.8	---	1.3	177,025	---	447	109,765	76	76	219,530	152	266	2,500
J-310-3	1.660	3a	---	228	159,275	6	17,750	.8	15,000.0	1.3	192,025	---	447	129,265	90	90	258,530	180	315	2,500
J-330-3	1.637	3c	---	228	159,275	6	---	.8	15,000.0	1.3	174,275	---	447	115,065	80	80	230,130	160	280	2,500
PLANNING UNIT III TOTAL			0		637,100		36,500				702,600	---		449,660	312	312	899,320	624	1,092	
FULL BUILDOUT TOTAL			1,716		2,496,245		269,900				2,866,145	400		2,413,981	1,674	1,674	4,827,963	3,348	5,859	

NOTES:

- (1) Maximum Day Demand = 2.0 x Average Day Demand
- (2) Peak Hour Demand = 3.5 x Average Day Demand
- (3) Per Figure 4.1-3, COS Design Standards & Policies Manual, Section 4.

Appendix C - For Reference Only

WOOD/PATEL

MODELED WATER SUPPLY / PRV STATUS

CIVIL ENGINEERS * HYDROLOGISTS * LAND SURVEYORS

Project: Master On-Site Water/Wastewater Plan for One Scottsdale (Stacked 40s)
 Location: Scottsdale, Arizona
 Date: December 3, 2015

Proj. Number: 154391
 Proj. Engineer: JGR

PLANNING UNIT II

SCENARIO	PRV HGL SETTING	PRV STATUS			FLOW FROM ZONE 4 BPS		FLOW FROM ZONE 5 BPS		TOTAL FLOW (GPM)
		PRV-2-EX 1	PRV-3 2	PRV-4 3	GPM	%	GPM	%	
AVE. DAY	1,755 FT.	CLOSED	CLOSED	CLOSED	1,362	100.0%	0	0.0%	1,362
MAX DAY		CLOSED	CLOSED	CLOSED	2,724	100.0%	0	0.0%	2,724
PEAK HOUR		CLOSED	CLOSED	CLOSED	4,767	100.0%	0	0.0%	4,767

PLANNING UNITS II & III (FULL BUILDOUT)

SCENARIO	PRV HGL SETTING	PRV STATUS			FLOW FROM ZONE 4 BPS		FLOW FROM ZONE 5 BPS		TOTAL FLOW (GPM)
		PRV-2-EX 1	PRV-3 2	PRV-4 3	GPM	%	GPM	%	
AVE. DAY	1,755 FT.	CLOSED	CLOSED	CLOSED	1,362	81.4%	312	18.6%	1,674
MAX DAY		CLOSED	THROTTLING	CLOSED	2,417	72.2%	931	27.8%	3,348
PEAK HOUR		CLOSED	THROTTLING	THROTTLING	2,522	43.0%	3,337	57.0%	5,859

Notes

- 1 Existing Hayden Road PRV
- 2 Existing Scottsdale Road PRV
- 3 Proposed 73rd Street PRV

↑ This could create issues in North Areas or ES

Appendix C - For Reference Only

APPENDIX C

HYDRAULIC MODELING RESULTS

Appendix C - For Reference Only

Active Scenario: Average Day Demand - PU II

FlexTable: Junction Table

Label	Elevation (ft)	Zone	Demand (gpm)	Hydraulic Grade (ft)	Pressure (psi)
J-10-EX	1,608.0	Zone	0	1,760.9	66
J-20-EX	1,615.0	Zone	0	1,760.9	63
J-50-EX	1,632.0	Zone	0	1,760.9	56
J-60-EX	1,644.0	Zone	0	1,854.2	91
J-70-EX	1,650.0	Zone	0	1,854.2	88
J-80-EX	1,655.0	Zone	0	1,854.2	86
J-120-EX	1,669.0	Zone	0	1,854.2	80
J-90-EX	1,662.0	Zone	0	1,854.2	83
J-100-EX	1,665.0	Zone	0	1,854.2	82
J-170-EX	1,585.0	Zone	0	1,761.1	76
J-160-EX	1,610.0	Zone	0	1,761.8	66
J-150-EX	1,640.0	Zone	0	1,762.1	53
J-130-EX	1,700.0	Zone	0	1,854.2	67
J-30-EX	1,623.0	Zone	0	1,760.9	60
J-40-EX	1,627.0	Zone	0	1,760.9	58
J-110-EX	1,666.0	Zone	0	1,854.2	81
J-105-EX	1,665.0	Zone	0	1,854.2	82
J-125-EX	1,669.0	Zone	0	1,854.2	80
EX FH #1 - TEST HYDRANT	1,669.0	Zone	0	1,854.2	80
EX FH #2 - FLOW HYDRANT	1,666.0	Zone	0	1,854.2	81
J-150-2	1,616.0	PU2	0	1,760.6	63
J-100-2	1,615.0	PU2	0	1,760.7	63
J-160-2	1,620.0	PU2	59	1,760.7	61
J-111-2	1,639.0	PU2	0	1,760.9	53
J-101-2	1,637.0	PU2	0	1,760.9	54
J-220-2	1,631.0	PU2	154	1,760.8	56
J-121-2	1,638.0	PU2	0	1,761.0	53
J-110-2	1,613.0	PU2	231	1,760.6	64
J-130-2	1,613.0	PU2	82	1,760.6	64
J-200-2	1,632.0	PU2	233	1,760.7	56
J-190-2	1,625.0	PU2	76	1,760.7	59
J-170-2	1,614.0	PU2	58	1,760.7	63
J-120-2	1,612.0	PU2	94	1,760.6	64
J-105-2	1,609.0	PU2	67	1,760.7	66
J-102-2	1,616.0	PU2	76	1,760.7	63
J-165-2	1,617.1	PU2	0	1,760.7	62
J-180-2	1,626.0	PU2	183	1,760.7	58
J-175-2	1,621.5	PU2	49	1,760.7	60
J-100-3	1,639.0	PU3	0	1,854.2	93
J-110-3	1,643.0	PU3	0	1,854.2	91
J-120-3	1,647.0	PU3	0	1,854.2	90
J-130-3	1,650.0	PU3	0	1,854.2	88
J-140-3	1,665.0	PU3	0	1,854.2	82
J-150-3	1,653.0	PU3	0	1,854.2	87
J-160-3	1,654.0	PU3	0	1,854.2	87
J-170-3	1,656.0	PU3	0	1,854.2	86

4391- WaterCAD wtg
12/3/2015

Bentley Systems, Inc. Haestad Methods Solution
Center
27 Siemon Company Drive Suite 200 W
Watertown, CT 06795 USA +1-203-755-1666

Bentley WaterCAD V8i (SELECTseries 6)
[08 11.06.58]
Page 1 of 2

Appendix C - For Reference Only

Active Scenario: Average Day Demand - PU II

FlexTable: Junction Table

Label	Elevation (ft)	Zone	Demand (gpm)	Hydraulic Grade (ft)	Pressure (psi)
J-180-3	1,660.5	PU3	0	1,854.2	84
J-190-3	1,663.0	PU3	0	1,854.2	83
J-200-3	1,666.0	PU3	0	1,854.2	81
J-210-3	1,658.0	PU3	0	1,854.2	85
J-220-3	1,663.0	PU3	0	1,854.2	83
J-230-3	1,665.0	PU3	0	1,854.2	82
J-240-3	1,647.0	PU3	0	1,854.2	90
J-250-3	1,645.0	PU3	0	1,854.2	91
J-260-3	1,647.5	PU3	0	1,854.2	89
J-270-3	1,642.0	PU3	0	1,854.2	92
J-290-3	1,650.0	PU3	0	1,854.2	88
J-300-3	1,652.5	PU3	0	1,854.2	87
J-310-3	1,660.0	PU3	0	1,854.2	84
J-265-3	1,650.0	PU3	0	1,854.2	88
J-245-3	1,648.9	PU3	0	1,854.2	89
J-235-3	1,665.0	PU3	0	1,854.2	82
J-135-3	1,661.7	PU3	0	1,854.2	83
J-320-3	1,642.0	PU3	0	1,854.2	92
J-330-3	1,637.0	PU3	0	1,854.2	94

Appendix C - For Reference Only

Active Scenario: Maximum Day Demand - PU II

FlexTable: Junction Table

Label	Elevation (ft)	Zone	Demand (gpm)	Hydraulic Grade (ft)	Pressure (psi)
J-10-EX	1,608.0	Zone	0	1,752.8	63
J-20-EX	1,615.0	Zone	0	1,752.7	60
J-50-EX	1,632.0	Zone	0	1,752.7	52
J-60-EX	1,644.0	Zone	0	1,854.2	91
J-70-EX	1,650.0	Zone	0	1,854.2	88
J-80-EX	1,655.0	Zone	0	1,854.2	86
J-120-EX	1,669.0	Zone	0	1,854.2	80
J-90-EX	1,662.0	Zone	0	1,854.2	83
J-100-EX	1,665.0	Zone	0	1,854.2	82
J-170-EX	1,585.0	Zone	0	1,753.5	73
J-160-EX	1,610.0	Zone	0	1,756.1	63
J-150-EX	1,640.0	Zone	0	1,757.0	51
J-130-EX	1,700.0	Zone	0	1,854.2	67
J-30-EX	1,623.0	Zone	0	1,752.7	56
J-40-EX	1,627.0	Zone	0	1,752.7	54
J-110-EX	1,666.0	Zone	0	1,854.2	81
J-105-EX	1,665.0	Zone	0	1,854.2	82
J-125-EX	1,669.0	Zone	0	1,854.2	80
EX FH #1 - TEST HYDRANT	1,669.0	Zone	0	1,854.2	80
EX FH #2 - FLOW HYDRANT	1,666.0	Zone	0	1,854.2	81
J-150-2	1,616.0	PU2	0	1,751.8	59
J-100-2	1,615.0	PU2	0	1,752.1	59
J-160-2	1,620.0	PU2	118	1,751.9	57
J-111-2	1,639.0	PU2	0	1,752.8	49
J-101-2	1,637.0	PU2	0	1,752.7	50
J-220-2	1,631.0	PU2	308	1,752.5	53
J-121-2	1,638.0	PU2	0	1,753.1	50
J-110-2	1,613.0	PU2	462	1,751.8	60
J-130-2	1,613.0	PU2	164	1,751.8	60
J-200-2	1,632.0	PU2	466	1,752.2	52
J-190-2	1,625.0	PU2	152	1,752.2	55
J-170-2	1,614.0	PU2	116	1,752.1	60
J-120-2	1,612.0	PU2	188	1,751.8	60
J-105-2	1,609.0	PU2	134	1,752.0	62
J-102-2	1,616.0	PU2	152	1,752.2	59
J-165-2	1,617.1	PU2	0	1,752.1	58
J-180-2	1,626.0	PU2	366	1,752.2	55
J-175-2	1,621.5	PU2	98	1,752.1	56
J-100-3	1,639.0	PU3	0	1,854.2	93
J-110-3	1,643.0	PU3	0	1,854.2	91
J-120-3	1,647.0	PU3	0	1,854.2	90
J-130-3	1,650.0	PU3	0	1,854.2	88
J-140-3	1,665.0	PU3	0	1,854.2	82
J-150-3	1,653.0	PU3	0	1,854.2	87
J-160-3	1,654.0	PU3	0	1,854.2	87
J-170-3	1,656.0	PU3	0	1,854.2	86

4391- WaterCAD wtg
12/3/2016

Bentley Systems, Inc. Haestad Methods Solution
Center
27 Siemon Company Drive Suite 200 W
Watertown, CT 06795 USA +1-203-755-1666

Bentley WaterCAD V8i (SELECTseries 6)
[08.11.06.58]
Page 1 of 2

Appendix C - For Reference Only

Active Scenario: Maximum Day Demand - PU II

FlexTable: Junction Table

Label	Elevation (ft)	Zone	Demand (gpm)	Hydraulic Grade (ft)	Pressure (psi)
J-180-3	1,660.5	PU3	0	1,854.2	84
J-190-3	1,663.0	PU3	0	1,854.2	83
J-200-3	1,666.0	PU3	0	1,854.2	81
J-210-3	1,658.0	PU3	0	1,854.2	85
J-220-3	1,663.0	PU3	0	1,854.2	83
J-230-3	1,665.0	PU3	0	1,854.2	82
J-240-3	1,647.0	PU3	0	1,854.2	90
J-250-3	1,645.0	PU3	0	1,854.2	91
J-260-3	1,647.5	PU3	0	1,854.2	89
J-270-3	1,642.0	PU3	0	1,854.2	92
J-290-3	1,650.0	PU3	0	1,854.2	88
J-300-3	1,652.5	PU3	0	1,854.2	87
J-310-3	1,660.0	PU3	0	1,854.2	84
J-265-3	1,650.0	PU3	0	1,854.2	88
J-245-3	1,648.9	PU3	0	1,854.2	89
J-235-3	1,665.0	PU3	0	1,854.2	82
J-135-3	1,661.7	PU3	0	1,854.2	83
J-320-3	1,642.0	PU3	0	1,854.2	92
J-330-3	1,637.0	PU3	0	1,854.2	94

Appendix C - For Reference Only

Active Scenario: Peak Hour Demand - PU II

FlexTable: Junction Table

Label	Elevation (ft)	Zone	Demand (gpm)	Hydraulic Grade (ft)	Pressure (psi)
J-10-EX	1,608.0	Zone	0	1,732.3	54
J-20-EX	1,615.0	Zone	0	1,732.1	51
J-50-EX	1,632.0	Zone	0	1,732.2	43
J-60-EX	1,644.0	Zone	0	1,854.2	91
J-70-EX	1,650.0	Zone	0	1,854.2	88
J-80-EX	1,655.0	Zone	0	1,854.2	86
J-120-EX	1,669.0	Zone	0	1,854.2	80
J-90-EX	1,662.0	Zone	0	1,854.2	83
J-100-EX	1,665.0	Zone	0	1,854.2	82
J-170-EX	1,585.0	Zone	0	1,734.4	65
J-160-EX	1,610.0	Zone	0	1,741.8	57
J-150-EX	1,640.0	Zone	0	1,744.3	45
J-130-EX	1,700.0	Zone	0	1,854.2	67
J-30-EX	1,623.0	Zone	0	1,732.2	47
J-40-EX	1,627.0	Zone	0	1,732.2	46
J-110-EX	1,666.0	Zone	0	1,854.2	81
J-105-EX	1,665.0	Zone	0	1,854.2	82
J-125-EX	1,669.0	Zone	0	1,854.2	80
EX FH #1 - TEST HYDRANT	1,669.0	Zone	0	1,854.2	80
EX FH #2 - FLOW HYDRANT	1,666.0	Zone	0	1,854.2	81
J-150-2	1,616.0	PU2	0	1,729.6	49
J-100-2	1,615.0	PU2	0	1,730.5	50
J-160-2	1,620.0	PU2	207	1,729.9	48
J-111-2	1,639.0	PU2	0	1,732.3	40
J-101-2	1,637.0	PU2	0	1,732.2	41
J-220-2	1,631.0	PU2	539	1,731.4	43
J-121-2	1,638.0	PU2	0	1,733.2	41
J-110-2	1,613.0	PU2	809	1,729.6	50
J-130-2	1,613.0	PU2	287	1,729.6	50
J-200-2	1,632.0	PU2	816	1,730.8	43
J-190-2	1,625.0	PU2	266	1,730.7	46
J-170-2	1,614.0	PU2	203	1,730.4	50
J-120-2	1,612.0	PU2	329	1,729.6	51
J-105-2	1,609.0	PU2	235	1,730.2	52
J-102-2	1,616.0	PU2	266	1,730.6	50
J-165-2	1,617.1	PU2	0	1,730.3	49
J-180-2	1,626.0	PU2	641	1,730.6	45
J-175-2	1,621.5	PU2	172	1,730.4	47
J-100-3	1,639.0	PU3	0	1,854.2	93
J-110-3	1,643.0	PU3	0	1,854.2	91
J-120-3	1,647.0	PU3	0	1,854.2	90
J-130-3	1,650.0	PU3	0	1,854.2	88
J-140-3	1,665.0	PU3	0	1,854.2	82
J-150-3	1,653.0	PU3	0	1,854.2	87
J-160-3	1,654.0	PU3	0	1,854.2	87
J-170-3	1,656.0	PU3	0	1,854.2	86

Appendix C - For Reference Only

Active Scenario: Peak Hour Demand - PU II

FlexTable: Junction Table

Label	Elevation (ft)	Zone	Demand (gpm)	Hydraulic Grade (ft)	Pressure (psi)
J-180-3	1,660.5	PU3	0	1,854.2	84
J-190-3	1,663.0	PU3	0	1,854.2	83
J-200-3	1,666.0	PU3	0	1,854.2	81
J-210-3	1,658.0	PU3	0	1,854.2	85
J-220-3	1,663.0	PU3	0	1,854.2	83
J-230-3	1,665.0	PU3	0	1,854.2	82
J-240-3	1,647.0	PU3	0	1,854.2	90
J-250-3	1,645.0	PU3	0	1,854.2	91
J-260-3	1,647.5	PU3	0	1,854.2	89
J-270-3	1,642.0	PU3	0	1,854.2	92
J-290-3	1,650.0	PU3	0	1,854.2	88
J-300-3	1,652.5	PU3	0	1,854.2	87
J-310-3	1,660.0	PU3	0	1,854.2	84
J-265-3	1,650.0	PU3	0	1,854.2	88
J-245-3	1,648.9	PU3	0	1,854.2	89
J-235-3	1,665.0	PU3	0	1,854.2	82
J-135-3	1,661.7	PU3	0	1,854.2	83
J-320-3	1,642.0	PU3	0	1,854.2	92
J-330-3	1,637.0	PU3	0	1,854.2	94

Appendix C - For Reference Only

Active Scenario: Average Day Demand - PU II & III

FlexTable: Junction Table

Label	Elevation (ft)	Zone	Demand (gpm)	Hydraulic Grade (ft)	Pressure (psi)
J-10-EX	1,608.0	Zone	0	1,760.9	66
J-20-EX	1,615.0	Zone	0	1,760.9	63
J-50-EX	1,632.0	Zone	0	1,760.9	56
J-60-EX	1,644.0	Zone	0	1,853.5	91
J-70-EX	1,650.0	Zone	0	1,853.5	88
J-80-EX	1,655.0	Zone	0	1,853.5	86
J-120-EX	1,669.0	Zone	0	1,853.7	80
J-90-EX	1,662.0	Zone	0	1,853.6	83
J-100-EX	1,665.0	Zone	0	1,853.6	82
J-170-EX	1,585.0	Zone	0	1,761.1	76
J-160-EX	1,610.0	Zone	0	1,761.8	66
J-150-EX	1,640.0	Zone	0	1,762.1	53
J-130-EX	1,700.0	Zone	0	1,853.7	67
J-30-EX	1,623.0	Zone	0	1,760.9	60
J-40-EX	1,627.0	Zone	0	1,760.9	58
J-110-EX	1,666.0	Zone	0	1,853.6	81
J-105-EX	1,665.0	Zone	0	1,853.6	82
J-125-EX	1,669.0	Zone	0	1,853.7	80
EX FH #1 - TEST HYDRANT	1,669.0	Zone	0	1,853.7	80
EX FH #2 - FLOW HYDRANT	1,666.0	Zone	0	1,853.6	81
J-150-2	1,616.0	PU2	0	1,760.6	63
J-100-2	1,615.0	PU2	0	1,760.7	63
J-160-2	1,620.0	PU2	59	1,760.7	61
J-111-2	1,639.0	PU2	0	1,760.9	53
J-101-2	1,637.0	PU2	0	1,760.9	54
J-220-2	1,631.0	PU2	154	1,760.8	56
J-121-2	1,638.0	PU2	0	1,761.0	53
J-110-2	1,613.0	PU2	231	1,760.6	64
J-130-2	1,613.0	PU2	82	1,760.6	64
J-200-2	1,632.0	PU2	233	1,760.7	56
J-190-2	1,625.0	PU2	76	1,760.7	59
J-170-2	1,614.0	PU2	58	1,760.7	63
J-120-2	1,612.0	PU2	94	1,760.6	64
J-105-2	1,609.0	PU2	67	1,760.7	66
J-102-2	1,616.0	PU2	76	1,760.7	63
J-165-2	1,617.1	PU2	0	1,760.7	62
J-180-2	1,626.0	PU2	183	1,760.7	58
J-175-2	1,621.5	PU2	49	1,760.7	60
J-100-3	1,639.0	PU3	0	1,853.5	93
J-110-3	1,643.0	PU3	0	1,853.5	91
J-120-3	1,647.0	PU3	0	1,853.5	89
J-130-3	1,650.0	PU3	0	1,853.5	88
J-140-3	1,665.0	PU3	0	1,853.6	82
J-150-3	1,653.0	PU3	0	1,853.5	87
J-160-3	1,654.0	PU3	0	1,853.5	86
J-170-3	1,656.0	PU3	0	1,853.5	85

4391- WaterCAD wtg
12/3/2015

Bentley Systems, Inc. Haestad Methods Solution
Center
27 Siemon Company Drive Suite 200 W
Watertown, CT 06795 USA +1-203-755-1666

Bentley WaterCAD V8i (SELECTseries 6)
[08 11 06.58]
Page 1 of 2

Appendix C - For Reference Only

Active Scenario: Average Day Demand - PU II & III

FlexTable: Junction Table

Label	Elevation (ft)	Zone	Demand (gpm)	Hydraulic Grade (ft)	Pressure (psi)
J-180-3	1,660.5	PU3	0	1,853.6	84
J-190-3	1,663.0	PU3	0	1,853.6	82
J-200-3	1,666.0	PU3	0	1,853.6	81
J-210-3	1,658.0	PU3	0	1,853.5	85
J-220-3	1,663.0	PU3	0	1,853.6	82
J-230-3	1,665.0	PU3	0	1,853.6	82
J-240-3	1,647.0	PU3	0	1,853.5	89
J-250-3	1,645.0	PU3	0	1,853.5	90
J-260-3	1,647.5	PU3	0	1,853.5	89
J-270-3	1,642.0	PU3	66	1,853.5	92
J-290-3	1,650.0	PU3	0	1,853.5	88
J-300-3	1,652.5	PU3	76	1,853.5	87
J-310-3	1,660.0	PU3	90	1,853.5	84
J-265-3	1,650.0	PU3	0	1,853.5	88
J-245-3	1,648.9	PU3	0	1,853.5	89
J-235-3	1,665.0	PU3	0	1,853.6	82
J-135-3	1,661.7	PU3	0	1,853.5	83
J-320-3	1,642.0	PU3	0	1,853.5	92
J-330-3	1,637.0	PU3	80	1,853.5	94

Appendix C - For Reference Only

Active Scenario: Maximum Day Demand - PU II & III

FlexTable: Junction Table

Label	Elevation (ft)	Zone	Demand (gpm)	Hydraulic Grade (ft)	Pressure (psi)
J-10-EX	1,608.0	Zone	0	1,755.0	64
J-20-EX	1,615.0	Zone	0	1,754.9	61
J-50-EX	1,632.0	Zone	0	1,755.0	53
J-60-EX	1,644.0	Zone	0	1,849.0	89
J-70-EX	1,650.0	Zone	0	1,849.1	86
J-80-EX	1,655.0	Zone	0	1,849.2	84
J-120-EX	1,669.0	Zone	0	1,850.2	78
J-90-EX	1,662.0	Zone	0	1,849.3	81
J-100-EX	1,665.0	Zone	0	1,849.4	80
J-170-EX	1,585.0	Zone	0	1,755.6	74
J-160-EX	1,610.0	Zone	0	1,757.7	64
J-150-EX	1,640.0	Zone	0	1,758.4	51
J-130-EX	1,700.0	Zone	0	1,850.6	65
J-30-EX	1,623.0	Zone	0	1,755.0	57
J-40-EX	1,627.0	Zone	0	1,755.0	55
J-110-EX	1,666.0	Zone	0	1,849.6	79
J-105-EX	1,665.0	Zone	0	1,849.5	80
J-125-EX	1,669.0	Zone	0	1,850.6	79
EX FH #1 - TEST HYDRANT	1,669.0	Zone	0	1,850.6	79
EX FH #2 - FLOW HYDRANT	1,666.0	Zone	0	1,849.6	79
J-150-2	1,616.0	PU2	0	1,754.1	60
J-100-2	1,615.0	PU2	0	1,754.4	60
J-160-2	1,620.0	PU2	118	1,754.2	58
J-111-2	1,639.0	PU2	0	1,755.0	50
J-101-2	1,637.0	PU2	0	1,755.0	51
J-220-2	1,631.0	PU2	308	1,754.7	54
J-121-2	1,638.0	PU2	0	1,755.3	51
J-110-2	1,613.0	PU2	462	1,754.0	61
J-130-2	1,613.0	PU2	164	1,754.0	61
J-200-2	1,632.0	PU2	466	1,754.5	53
J-190-2	1,625.0	PU2	152	1,754.4	56
J-170-2	1,614.0	PU2	116	1,754.3	61
J-120-2	1,612.0	PU2	188	1,754.0	61
J-105-2	1,609.0	PU2	134	1,754.3	63
J-102-2	1,616.0	PU2	152	1,754.4	60
J-165-2	1,617.1	PU2	0	1,754.3	59
J-180-2	1,626.0	PU2	366	1,754.4	56
J-175-2	1,621.5	PU2	98	1,754.3	57
J-100-3	1,639.0	PU3	0	1,849.0	91
J-110-3	1,643.0	PU3	0	1,849.1	89
J-120-3	1,647.0	PU3	0	1,849.1	87
J-130-3	1,650.0	PU3	0	1,849.1	86
J-140-3	1,665.0	PU3	0	1,849.3	80
J-150-3	1,653.0	PU3	0	1,849.2	85
J-160-3	1,654.0	PU3	0	1,849.2	84
J-170-3	1,656.0	PU3	0	1,849.2	84

Appendix C - For Reference Only

Active Scenario: Maximum Day Demand - PU II & III

FlexTable: Junction Table

Label	Elevation (ft)	Zone	Demand (gpm)	Hydraulic Grade (ft)	Pressure (psi)
J-180-3	1,660.5	PU3	0	1,849.3	82
J-190-3	1,663.0	PU3	0	1,849.4	81
J-200-3	1,666.0	PU3	0	1,849.7	79
J-210-3	1,658.0	PU3	0	1,849.2	83
J-220-3	1,663.0	PU3	0	1,849.3	81
J-230-3	1,665.0	PU3	0	1,849.3	80
J-240-3	1,647.0	PU3	0	1,849.1	87
J-250-3	1,645.0	PU3	0	1,849.1	88
J-260-3	1,647.5	PU3	0	1,849.1	87
J-270-3	1,642.0	PU3	132	1,849.0	90
J-290-3	1,650.0	PU3	0	1,849.0	86
J-300-3	1,652.5	PU3	152	1,848.9	85
J-310-3	1,660.0	PU3	180	1,848.9	82
J-265-3	1,650.0	PU3	0	1,849.2	86
J-245-3	1,648.9	PU3	0	1,849.1	87
J-235-3	1,665.0	PU3	0	1,849.3	80
J-135-3	1,661.7	PU3	0	1,849.2	81
J-320-3	1,642.0	PU3	0	1,849.0	90
J-330-3	1,637.0	PU3	160	1,848.8	92

Appendix C - For Reference Only

Active Scenario: Peak Hour Demand - PU II & III

FlexTable: Junction Table

Label	Elevation (ft)	Zone	Demand (gpm)	Hydraulic Grade (ft)	Pressure (psi)
J-10-EX	1,608.0	Zone	0	1,753.9	63
J-20-EX	1,615.0	Zone	0	1,753.8	60
J-50-EX	1,632.0	Zone	0	1,754.7	53
J-60-EX	1,644.0	Zone	0	1,798.9	67
J-70-EX	1,650.0	Zone	0	1,799.4	65
J-80-EX	1,655.0	Zone	0	1,800.5	63
J-120-EX	1,669.0	Zone	0	1,812.1	62
J-90-EX	1,662.0	Zone	0	1,801.9	61
J-100-EX	1,665.0	Zone	0	1,803.3	60
J-170-EX	1,585.0	Zone	0	1,754.6	73
J-160-EX	1,610.0	Zone	0	1,757.1	64
J-150-EX	1,640.0	Zone	0	1,757.9	51
J-130-EX	1,700.0	Zone	0	1,815.5	50
J-30-EX	1,623.0	Zone	0	1,754.3	57
J-40-EX	1,627.0	Zone	0	1,754.6	55
J-110-EX	1,666.0	Zone	0	1,805.4	60
J-105-EX	1,665.0	Zone	0	1,803.8	60
J-125-EX	1,669.0	Zone	0	1,815.5	63
EX FH #1 - TEST HYDRANT	1,669.0	Zone	0	1,815.5	63
EX FH #2 - FLOW HYDRANT	1,666.0	Zone	0	1,805.4	60
J-150-2	1,616.0	PU2	0	1,751.4	59
J-100-2	1,615.0	PU2	0	1,752.2	59
J-160-2	1,620.0	PU2	207	1,751.7	57
J-111-2	1,639.0	PU2	0	1,754.7	50
J-101-2	1,637.0	PU2	0	1,754.7	51
J-220-2	1,631.0	PU2	539	1,753.2	53
J-121-2	1,638.0	PU2	0	1,754.7	50
J-110-2	1,613.0	PU2	809	1,751.3	60
J-130-2	1,613.0	PU2	287	1,751.4	60
J-200-2	1,632.0	PU2	816	1,752.9	52
J-190-2	1,625.0	PU2	266	1,752.6	55
J-170-2	1,614.0	PU2	203	1,752.2	60
J-120-2	1,612.0	PU2	329	1,751.3	60
J-105-2	1,609.0	PU2	235	1,752.0	62
J-102-2	1,616.0	PU2	266	1,752.4	59
J-165-2	1,617.1	PU2	0	1,752.1	58
J-180-2	1,626.0	PU2	641	1,752.5	55
J-175-2	1,621.5	PU2	172	1,752.2	57
J-100-3	1,639.0	PU3	0	1,797.7	69
J-110-3	1,643.0	PU3	0	1,798.8	67
J-120-3	1,647.0	PU3	0	1,799.1	66
J-130-3	1,650.0	PU3	0	1,799.9	65
J-140-3	1,665.0	PU3	0	1,802.3	59
J-150-3	1,653.0	PU3	0	1,800.4	64
J-160-3	1,654.0	PU3	0	1,800.5	63
J-170-3	1,656.0	PU3	0	1,800.6	63

Appendix C - For Reference Only

Active Scenario: Peak Hour Demand - PU II & III

FlexTable: Junction Table

Label	Elevation (ft)	Zone	Demand (gpm)	Hydraulic Grade (ft)	Pressure (psi)
J-180-3	1,660.5	PU3	0	1,801.8	61
J-190-3	1,663.0	PU3	0	1,803.0	61
J-200-3	1,666.0	PU3	0	1,806.6	61
J-210-3	1,658.0	PU3	0	1,801.4	62
J-220-3	1,663.0	PU3	0	1,802.4	60
J-230-3	1,665.0	PU3	0	1,802.3	59
J-240-3	1,647.0	PU3	0	1,799.8	66
J-250-3	1,645.0	PU3	0	1,800.0	67
J-260-3	1,647.5	PU3	0	1,800.1	66
J-270-3	1,642.0	PU3	231	1,798.9	68
J-290-3	1,650.0	PU3	0	1,799.2	65
J-300-3	1,652.5	PU3	266	1,799.1	63
J-310-3	1,660.0	PU3	315	1,799.4	60
J-265-3	1,650.0	PU3	0	1,800.2	65
J-245-3	1,648.9	PU3	0	1,800.1	65
J-235-3	1,665.0	PU3	0	1,802.3	59
J-135-3	1,661.7	PU3	0	1,801.3	60
J-320-3	1,642.0	PU3	0	1,798.8	68
J-330-3	1,637.0	PU3	280	1,798.2	70

Appendix C - For Reference Only

Bldg pumps reqd.

Active Scenario: Peak Hour Demand - Multistory Scenario - PU II & III

FlexTable: Junction Table

Label	Elevation (ft)	Zone	Demand (gpm)	Hydraulic Grade (ft)	Pressure (psi)
J-10-EX	1,612.0	Zone	0	1,753.9	61
J-20-EX	1,615.0	Zone	0	1,753.8	60
J-50-EX	1,632.0	Zone	0	1,754.7	53
J-60-EX	1,644.0	Zone	0	1,798.9	67
J-70-EX	1,650.0	Zone	0	1,799.4	65
J-80-EX	1,655.0	Zone	0	1,800.5	63
J-120-EX	1,669.0	Zone	0	1,812.1	62
J-90-EX	1,662.0	Zone	0	1,801.9	61
J-100-EX	1,665.0	Zone	0	1,803.3	60
J-170-EX	1,585.0	Zone	0	1,754.6	73
J-160-EX	1,610.0	Zone	0	1,757.1	64
J-150-EX	1,640.0	Zone	0	1,757.9	51
J-130-EX	1,700.0	Zone	0	1,815.5	50
J-30-EX	1,623.0	Zone	0	1,754.3	57
J-40-EX	1,627.0	Zone	0	1,754.6	55
J-110-EX	1,666.0	Zone	0	1,805.4	60
J-105-EX	1,665.0	Zone	0	1,803.8	60
J-125-EX	1,669.0	Zone	0	1,815.5	63
EX FH #1 - TEST HYDRANT	1,669.0	Zone	0	1,815.5	63
EX FH #2 - FLOW HYDRANT	1,666.0	Zone	0	1,805.4	60
J-150-2	1,676.0	PU2	0	1,751.4	33
J-100-2	1,675.0	PU2	0	1,752.2	33
J-160-2	1,680.0	PU2	207	1,751.7	31
J-111-2	1,699.0	PU2	0	1,754.7	24
J-101-2	1,637.0	PU2	0	1,754.7	51
J-220-2	1,691.0	PU2	539	1,753.2	27
J-121-2	1,698.0	PU2	0	1,754.7	25
J-110-2	1,671.0	PU2	809	1,751.3	35
J-130-2	1,673.0	PU2	287	1,751.4	34
J-200-2	1,692.0	PU2	816	1,752.9	26
J-190-2	1,685.0	PU2	266	1,752.6	29
J-170-2	1,674.0	PU2	203	1,752.2	34
J-120-2	1,672.0	PU2	329	1,751.3	34
J-105-2	1,612.0	Zone	235	1,752.0	61
J-102-2	1,616.0	PU2	266	1,752.4	59
J-165-2	1,674.0	PU2	0	1,752.1	34
J-180-2	1,686.0	PU2	641	1,752.5	29
J-175-2	1,680.0	PU2	172	1,752.2	31
J-100-3	1,699.0	PU3	0	1,797.7	43
J-110-3	1,703.0	PU3	0	1,798.8	41
J-120-3	1,697.0	PU3	0	1,799.1	44
J-130-3	1,710.0	PU3	0	1,799.9	39
J-140-3	1,725.0	PU3	0	1,802.3	33
J-150-3	1,713.0	PU3	0	1,800.4	38
J-160-3	1,714.0	PU3	0	1,800.5	37
J-170-3	1,716.0	PU3	0	1,800.6	37

+60'

33

34

33

Press problems here!

Appendix C - For Reference Only

Active Scenario: Peak Hour Demand - Multistory Scenerio - PU II & III

FlexTable: Junction Table

Label	Elevation (ft)	Zone	Demand (gpm)	Hydraulic Grade (ft)	Pressure (psi)
J-180-3	1,720.5	PU3	0	1,801.8	35
J-190-3	1,723.0	PU3	0	1,803.0	35
J-200-3	1,726.0	PU3	0	1,806.6	35
J-210-3	1,718.0	PU3	0	1,801.4	36
J-220-3	1,723.0	PU3	0	1,802.4	34
J-230-3	1,725.0	PU3	0	1,802.3	33
J-240-3	1,707.0	PU3	0	1,799.8	40
J-250-3	1,705.0	PU3	0	1,800.0	41
J-260-3	1,707.5	PU3	0	1,800.1	40
J-270-3	1,702.0	PU3	231	1,798.9	42
J-290-3	1,710.0	PU3	0	1,799.2	39
J-300-3	1,712.5	PU3	266	1,799.1	37
J-310-3	1,720.0	PU3	315	1,799.4	34
J-265-3	1,710.0	PU3	0	1,800.2	39
J-245-3	1,710.5	PU3	0	1,800.1	39
J-235-3	1,725.0	PU3	0	1,802.3	33
J-135-3	1,721.7	PU3	0	1,801.3	34
J-320-3	1,642.0	PU3	0	1,798.8	68
J-330-3	1,637.0	PU3	280	1,798.2	70

Appendix C - For Reference Only

Active Scenario: Average Day Demand - PU II

FlexTable: Pipe Table

Label	Hazen-Williams C	Diameter (in)	Length (User Defined) (ft)	Material	Flow (gpm)	Velocity (ft/s)
MODELED ZONE						
4 WATER SUPPLY	130.0	16.0	1,750.00	Ductile Iron	1,362	2.17
P-20-EX	130.0	16.0	306.00	Ductile Iron	-311	0.50
P-30-EX	130.0	16.0	450.00	Ductile Iron	94	0.15
P-40-EX	130.0	16.0	368.00	Ductile Iron	94	0.15
P-50-EX	150.0	16.0	564.00	PVC	-94	0.15
P-60-EX	150.0	12.0	165.00	PVC	0	0.00
P-65-EX	150.0	12.0	477.00	PVC	0	0.00
P-70-EX	150.0	12.0	392.00	PVC	0	0.00
P-80-EX	150.0	12.0	373.00	PVC	0	0.00
P-90-EX	150.0	12.0	557.00	PVC	0	0.00
P-100-2	130.0	8.0	301.00	Ductile Iron	167	1.06
P-100-3	130.0	12.0	203.00	Ductile Iron	0	0.00
P-100-EX	130.0	12.0	483.00	Ductile Iron	0	0.00
P-101-2	130.0	16.0	386.00	Ductile Iron	94	0.15
P-105-2	130.0	12.0	299.00	Ductile Iron	-185	0.52
P-110-2	130.0	12.0	277.00	Ductile Iron	-284	0.81
P-110-3	130.0	12.0	0.00	Ductile Iron	0	0.00
P-110-EX	130.0	12.0	0.00	Ductile Iron	0	0.00
P-111-2	130.0	16.0	243.00	Ductile Iron	94	0.15
P-115-EX	130.0	12.0	0.00	Ductile Iron	0	0.00
P-120-2	130.0	12.0	319.00	Ductile Iron	53	0.15
P-120-3	130.0	12.0	0.00	Ductile Iron	0	0.00
P-120-EX	130.0	12.0	442.00	Ductile Iron	0	0.00
P-121-2	130.0	16.0	708.00	Ductile Iron	-441	0.70
P-125-EX	130.0	12.0	0.00	Ductile Iron	0	0.00
P-130-2	130.0	12.0	319.00	Ductile Iron	-41	0.12
P-130-3	130.0	12.0	0.00	Ductile Iron	0	0.00
P-130-EX	130.0	12.0	0.00	Ductile Iron	0	0.00
P-131-2	130.0	16.0	2,109.00	Ductile Iron	-884	1.41
P-140-2	130.0	12.0	307.00	Ductile Iron	-405	1.15
P-140-3	130.0	12.0	0.00	Ductile Iron	0	0.00
P-145-2	130.0	12.0	184.00	Ductile Iron	-144	0.41
P-145-3	130.0	12.0	0.00	Ductile Iron	0	0.00
P-145-EX	130.0	16.0	2,609.00	Ductile Iron	0	0.00
P-150-2	130.0	12.0	0.00	Ductile Iron	-123	0.35
P-150-3	130.0	12.0	0.00	Ductile Iron	0	0.00
P-150-EX	130.0	16.0	412.00	Ductile Iron	0	0.00
P-160-2	130.0	12.0	351.00	Ductile Iron	123	0.35
P-160-3	130.0	12.0	0.00	Ductile Iron	0	0.00
P-160-EX	130.0	16.0	1,528.00	Ductile Iron	-478	0.76
P-165-2	130.0	12.0	0.00	Ductile Iron	182	0.52
P-170-2	130.0	12.0	0.00	Ductile Iron	86	0.24
P-170-3	130.0	8.0	0.00	Ductile Iron	0	0.00
P-170-EX	140.0	16.0	5,280.00	Asbestos Cement	-478	0.76

Appendix C - For Reference Only

Active Scenario: Average Day Demand - PU II

FlexTable: Pipe Table

Label	Hazen-Williams C	Diameter (in)	Length (User Defined) (ft)	Material	Flow (gpm)	Velocity (ft/s)
P-175-2	130.0	12.0	335.00	Ductile Iron	144	0.41
P-175-2	130.0	12.0	0.00	Ductile Iron	-96	0.27
P-175-EX	130.0	16.0	1,254.00	Ductile Iron	-478	0.76
P-180-2	130.0	12.0	0.00	Ductile Iron	-145	0.41
P-180-3	130.0	8.0	0.00	Ductile Iron	1	0.00
P-180-EX	130.0	6.0	0.00	Ductile Iron	0	0.00
P-190-3	130.0	8.0	0.00	Ductile Iron	0	0.00
P-190-EX	130.0	6.0	0.00	Ductile Iron	0	0.00
P-195-2	130.0	12.0	0.00	Ductile Iron	39	0.11
P-200-2	130.0	12.0	457.00	Ductile Iron	-115	0.32
P-200-3	130.0	8.0	0.00	Ductile Iron	0	0.00
P-210-3	130.0	8.0	0.00	Ductile Iron	0	0.00
P-220-2	130.0	12.0	0.00	Ductile Iron	-289	0.82
P-220-3	130.0	8.0	0.00	Ductile Iron	0	0.00
P-225-2	130.0	12.0	507.00	Ductile Iron	-443	1.26
P-230-2	130.0	12.0	0.00	Ductile Iron	348	0.99
P-230-3	130.0	8.0	0.00	Ductile Iron	0	0.00
P-240-3	130.0	8.0	0.00	Ductile Iron	0	0.00
P-250-3	130.0	8.0	0.00	Ductile Iron	0	0.00
P-260-3	130.0	8.0	0.00	Ductile Iron	0	0.00
P-265-3	130.0	8.0	0.00	Ductile Iron	0	0.00
P-270-3	130.0	8.0	0.00	Ductile Iron	0	0.00
P-280-3	130.0	8.0	0.00	Ductile Iron	0	0.00
P-290-3	130.0	8.0	0.00	Ductile Iron	0	0.00
P-300-3	130.0	8.0	0.00	Ductile Iron	0	0.00
P-310-3	130.0	8.0	0.00	Ductile Iron	0	0.00
P-315-3	130.0	8.0	0.00	Ductile Iron	0	0.00
P-320-3	130.0	8.0	0.00	Ductile Iron	0	0.00
P-325-3	130.0	8.0	0.00	Ductile Iron	0	0.00
P-330-3	130.0	8.0	0.00	Ductile Iron	0	0.00
P-335-3	130.0	8.0	0.00	Ductile Iron	0	0.00
P-340-3	130.0	12.0	0.00	Ductile Iron	0	0.00
P-345-3	130.0	12.0	0.00	Ductile Iron	0	0.00
P-370-3	130.0	8.0	0.00	Ductile Iron	0	0.00
P-380-3	130.0	8.0	0.00	Ductile Iron	0	0.00
P-390-3	130.0	8.0	0.00	Ductile Iron	0	0.00
P-400-3	130.0	8.0	0.00	Ductile Iron	0	0.00
P-410-3	130.0	8.0	0.00	Ductile Iron	0	0.00
P-420-3	130.0	8.0	0.00	Ductile Iron	0	0.00
P-430-3	130.0	8.0	0.00	Ductile Iron	0	0.00
P-440-3	130.0	8.0	0.00	Ductile Iron	0	0.00
ZONE 5 MODELED WATER SUPPLY - PUMP TO SYSTEM	130.0	48.0	1.00	Ductile Iron	0	0.00

Appendix C - For Reference Only

Active Scenario: Average Day Demand - PU II

FlexTable: Pipe Table

Label	Hazen-Williams C	Diameter (in)	Length (User Defined) (ft)	Material	Flow (gpm)	Velocity (ft/s)
ZONE 5 MODELED WATER SUPPLY - RES TO PUMP	130.0	48.0	1.00	Ductile Iron	0	0.00

Appendix C - For Reference Only

Active Scenario: Maximum Day Demand - PU II

FlexTable: Pipe Table

Label	Hazen-Williams C	Diameter (in)	Length (User Defined) (ft)	Material	Flow (gpm)	Velocity (ft/s)
MODELED ZONE						
4 WATER SUPPLY	130.0	16.0	1,750.00	Ductile Iron	2,724	4.35
P-20-EX	130.0	16.0	306.00	Ductile Iron	-622	0.99
P-30-EX	130.0	16.0	450.00	Ductile Iron	187	0.30
P-40-EX	130.0	16.0	368.00	Ductile Iron	187	0.30
P-50-EX	150.0	16.0	564.00	PVC	-187	0.30
P-60-EX	150.0	12.0	165.00	PVC	0	0.00
P-65-EX	150.0	12.0	477.00	PVC	0	0.00
P-70-EX	150.0	12.0	392.00	PVC	1	0.00
P-80-EX	150.0	12.0	373.00	PVC	0	0.00
P-90-EX	150.0	12.0	557.00	PVC	0	0.00
P-100-2	130.0	8.0	301.00	Ductile Iron	333	2.13
P-100-3	130.0	12.0	203.00	Ductile Iron	0	0.00
P-100-EX	130.0	12.0	483.00	Ductile Iron	0	0.00
P-101-2	130.0	16.0	386.00	Ductile Iron	187	0.30
P-105-2	130.0	12.0	299.00	Ductile Iron	-369	1.05
P-110-2	130.0	12.0	277.00	Ductile Iron	-568	1.61
P-110-3	130.0	12.0	0.00	Ductile Iron	0	0.00
P-110-EX	130.0	12.0	0.00	Ductile Iron	0	0.00
P-111-2	130.0	16.0	243.00	Ductile Iron	187	0.30
P-115-EX	130.0	12.0	0.00	Ductile Iron	0	0.00
P-120-2	130.0	12.0	319.00	Ductile Iron	106	0.30
P-120-3	130.0	12.0	0.00	Ductile Iron	0	0.00
P-120-EX	130.0	12.0	442.00	Ductile Iron	0	0.00
P-121-2	130.0	16.0	708.00	Ductile Iron	-882	1.41
P-125-EX	130.0	12.0	0.00	Ductile Iron	0	0.00
P-130-2	130.0	12.0	319.00	Ductile Iron	-82	0.23
P-130-3	130.0	12.0	0.00	Ductile Iron	0	0.00
P-130-EX	130.0	12.0	0.00	Ductile Iron	0	0.00
P-131-2	130.0	16.0	2,109.00	Ductile Iron	-1,769	2.82
P-140-2	130.0	12.0	307.00	Ductile Iron	-809	2.30
P-140-3	130.0	12.0	0.00	Ductile Iron	0	0.00
P-145-2	130.0	12.0	184.00	Ductile Iron	-288	0.82
P-145-3	130.0	12.0	0.00	Ductile Iron	0	0.00
P-145-EX	130.0	16.0	2,609.00	Ductile Iron	0	0.00
P-150-2	130.0	12.0	0.00	Ductile Iron	-246	0.70
P-150-3	130.0	12.0	0.00	Ductile Iron	0	0.00
P-150-EX	130.0	16.0	412.00	Ductile Iron	0	0.00
P-160-2	130.0	12.0	351.00	Ductile Iron	246	0.70
P-160-3	130.0	12.0	0.00	Ductile Iron	0	0.00
P-160-EX	130.0	16.0	1,528.00	Ductile Iron	-955	1.52
P-165-2	130.0	12.0	0.00	Ductile Iron	364	1.03
P-170-2	130.0	12.0	0.00	Ductile Iron	172	0.49
P-170-3	130.0	8.0	0.00	Ductile Iron	0	0.00
P-170-EX	140.0	16.0	5,280.00	Asbestos Cement	-955	1.52

Appendix C - For Reference Only

Active Scenario: Maximum Day Demand - PU II

FlexTable: Pipe Table

Label	Hazen-Williams C	Diameter (in)	Length (User Defined) (ft)	Material	Flow (gpm)	Velocity (ft/s)
P-175-2	130.0	12.0	335.00	Ductile Iron	288	0.82
P-175-2	130.0	12.0	0.00	Ductile Iron	-191	0.54
P-175-EX	130.0	16.0	1,254.00	Ductile Iron	-955	1.52
P-180-2	130.0	12.0	0.00	Ductile Iron	-289	0.82
P-180-3	130.0	8.0	0.00	Ductile Iron	1	0.01
P-180-EX	130.0	6.0	0.00	Ductile Iron	0	0.00
P-190-3	130.0	8.0	0.00	Ductile Iron	1	0.01
P-190-EX	130.0	6.0	0.00	Ductile Iron	0	0.00
P-195-2	130.0	12.0	0.00	Ductile Iron	77	0.22
P-200-2	130.0	12.0	457.00	Ductile Iron	-229	0.65
P-200-3	130.0	8.0	0.00	Ductile Iron	0	0.00
P-210-3	130.0	8.0	0.00	Ductile Iron	0	0.00
P-220-2	130.0	12.0	0.00	Ductile Iron	-578	1.64
P-220-3	130.0	8.0	0.00	Ductile Iron	0	0.00
P-225-2	130.0	12.0	507.00	Ductile Iron	-886	2.51
P-230-2	130.0	12.0	0.00	Ductile Iron	695	1.97
P-230-3	130.0	8.0	0.00	Ductile Iron	0	0.00
P-240-3	130.0	8.0	0.00	Ductile Iron	0	0.00
P-250-3	130.0	8.0	0.00	Ductile Iron	0	0.00
P-260-3	130.0	8.0	0.00	Ductile Iron	0	0.00
P-265-3	130.0	8.0	0.00	Ductile Iron	0	0.00
P-270-3	130.0	8.0	0.00	Ductile Iron	0	0.00
P-280-3	130.0	8.0	0.00	Ductile Iron	0	0.00
P-290-3	130.0	8.0	0.00	Ductile Iron	0	0.00
P-300-3	130.0	8.0	0.00	Ductile Iron	0	0.00
P-310-3	130.0	8.0	0.00	Ductile Iron	0	0.00
P-315-3	130.0	8.0	0.00	Ductile Iron	1	0.00
P-320-3	130.0	8.0	0.00	Ductile Iron	0	0.00
P-325-3	130.0	8.0	0.00	Ductile Iron	1	0.00
P-330-3	130.0	8.0	0.00	Ductile Iron	1	0.00
P-335-3	130.0	8.0	0.00	Ductile Iron	0	0.00
P-340-3	130.0	12.0	0.00	Ductile Iron	0	0.00
P-345-3	130.0	12.0	0.00	Ductile Iron	-1	0.00
P-370-3	130.0	8.0	0.00	Ductile Iron	0	0.00
P-380-3	130.0	8.0	0.00	Ductile Iron	0	0.00
P-390-3	130.0	8.0	0.00	Ductile Iron	0	0.00
P-400-3	130.0	8.0	0.00	Ductile Iron	0	0.00
P-410-3	130.0	8.0	0.00	Ductile Iron	1	0.00
P-420-3	130.0	8.0	0.00	Ductile Iron	0	0.00
P-430-3	130.0	8.0	0.00	Ductile Iron	0	0.00
P-440-3	130.0	8.0	0.00	Ductile Iron	0	0.00
ZONE 5 MODELED WATER SUPPLY - PUMP TO SYSTEM	130.0	48.0	1.00	Ductile Iron	0	0.00

Appendix C - For Reference Only

Active Scenario: Maximum Day Demand - PU II

FlexTable: Pipe Table

Label	Hazen-Williams C	Diameter (in)	Length (User Defined) (ft)	Material	Flow (gpm)	Velocity (ft/s)
ZONE 5 MODELED WATER SUPPLY - RES TO PUMP	130.0	48.0	1.00	Ductile Iron	0	0.00

Appendix C - For Reference Only

Active Scenario: Peak Hour Demand - PU II

FlexTable: Pipe Table

Label	Hazen-Williams C	Diameter (in)	Length (User Defined) (ft)	Material	Flow (gpm)	Velocity (ft/s)
MODELED ZONE						
4 WATER SUPPLY	130.0	16.0	1,750.00	Ductile Iron	4,770	7.61
P-20-EX	130.0	16.0	306.00	Ductile Iron	-1,089	1.74
P-30-EX	130.0	16.0	450.00	Ductile Iron	328	0.52
P-40-EX	130.0	16.0	368.00	Ductile Iron	328	0.52
P-50-EX	150.0	16.0	564.00	PVC	-328	0.52
P-60-EX	150.0	12.0	165.00	PVC	0	0.00
P-65-EX	150.0	12.0	477.00	PVC	0	0.00
P-70-EX	150.0	12.0	392.00	PVC	1	0.00
P-80-EX	150.0	12.0	373.00	PVC	0	0.00
P-90-EX	150.0	12.0	557.00	PVC	0	0.00
P-100-2	130.0	8.0	301.00	Ductile Iron	584	3.73
P-100-3	130.0	12.0	203.00	Ductile Iron	0	0.00
P-100-EX	130.0	12.0	483.00	Ductile Iron	0	0.00
P-101-2	130.0	16.0	386.00	Ductile Iron	328	0.52
P-105-2	130.0	12.0	299.00	Ductile Iron	-646	1.83
P-110-2	130.0	12.0	277.00	Ductile Iron	-995	2.82
P-110-3	130.0	12.0	0.00	Ductile Iron	0	0.00
P-110-EX	130.0	12.0	0.00	Ductile Iron	0	0.00
P-111-2	130.0	16.0	243.00	Ductile Iron	328	0.52
P-115-EX	130.0	12.0	0.00	Ductile Iron	0	0.00
P-120-2	130.0	12.0	319.00	Ductile Iron	186	0.53
P-120-3	130.0	12.0	0.00	Ductile Iron	0	0.00
P-120-EX	130.0	12.0	442.00	Ductile Iron	0	0.00
P-121-2	130.0	16.0	708.00	Ductile Iron	-1,545	2.47
P-125-EX	130.0	12.0	0.00	Ductile Iron	0	0.00
P-130-2	130.0	12.0	319.00	Ductile Iron	-143	0.40
P-130-3	130.0	12.0	0.00	Ductile Iron	0	0.00
P-130-EX	130.0	12.0	0.00	Ductile Iron	0	0.00
P-131-2	130.0	16.0	2,109.00	Ductile Iron	-3,097	4.94
P-140-2	130.0	12.0	307.00	Ductile Iron	-1,417	4.02
P-140-3	130.0	12.0	0.00	Ductile Iron	0	0.00
P-145-2	130.0	12.0	184.00	Ductile Iron	-505	1.43
P-145-3	130.0	12.0	0.00	Ductile Iron	-1	0.00
P-145-EX	130.0	16.0	2,609.00	Ductile Iron	0	0.00
P-150-2	130.0	12.0	0.00	Ductile Iron	-430	1.22
P-150-3	130.0	12.0	0.00	Ductile Iron	-1	0.00
P-150-EX	130.0	16.0	412.00	Ductile Iron	0	0.00
P-160-2	130.0	12.0	351.00	Ductile Iron	430	1.22
P-160-3	130.0	12.0	0.00	Ductile Iron	0	0.00
P-160-EX	130.0	16.0	1,528.00	Ductile Iron	-1,673	2.67
P-165-2	130.0	12.0	0.00	Ductile Iron	637	1.81
P-170-2	130.0	12.0	0.00	Ductile Iron	302	0.86
P-170-3	130.0	8.0	0.00	Ductile Iron	1	0.01
P-170-EX	140.0	16.0	5,280.00	Asbestos Cement	-1,673	2.67

Appendix C - For Reference Only

Active Scenario: Peak Hour Demand - PU II

FlexTable: Pipe Table

Label	Hazen-Williams C	Diameter (in)	Length (User Defined) (ft)	Material	Flow (gpm)	Velocity (ft/s)
P-175-2	130.0	12.0	335.00	Ductile Iron	505	1.43
P-175-2	130.0	12.0	0.00	Ductile Iron	-335	0.95
P-175-EX	130.0	16.0	1,254.00	Ductile Iron	-1,673	2.67
P-180-2	130.0	12.0	0.00	Ductile Iron	-507	1.44
P-180-3	130.0	8.0	0.00	Ductile Iron	2	0.02
P-180-EX	130.0	6.0	0.00	Ductile Iron	0	0.00
P-190-3	130.0	8.0	0.00	Ductile Iron	2	0.01
P-190-EX	130.0	6.0	0.00	Ductile Iron	0	0.00
P-195-2	130.0	12.0	0.00	Ductile Iron	135	0.38
P-200-2	130.0	12.0	457.00	Ductile Iron	-401	1.14
P-200-3	130.0	8.0	0.00	Ductile Iron	0	0.00
P-210-3	130.0	8.0	0.00	Ductile Iron	0	0.00
P-220-2	130.0	12.0	0.00	Ductile Iron	-1,013	2.87
P-220-3	130.0	8.0	0.00	Ductile Iron	0	0.00
P-225-2	130.0	12.0	507.00	Ductile Iron	-1,552	4.40
P-230-2	130.0	12.0	0.00	Ductile Iron	1,217	3.45
P-230-3	130.0	8.0	0.00	Ductile Iron	0	0.00
P-240-3	130.0	8.0	0.00	Ductile Iron	1	0.00
P-250-3	130.0	8.0	0.00	Ductile Iron	1	0.00
P-260-3	130.0	8.0	0.00	Ductile Iron	1	0.01
P-265-3	130.0	8.0	0.00	Ductile Iron	0	0.00
P-270-3	130.0	8.0	0.00	Ductile Iron	1	0.01
P-280-3	130.0	8.0	0.00	Ductile Iron	0	0.00
P-290-3	130.0	8.0	0.00	Ductile Iron	0	0.00
P-300-3	130.0	8.0	0.00	Ductile Iron	0	0.00
P-310-3	130.0	8.0	0.00	Ductile Iron	0	0.00
P-315-3	130.0	8.0	0.00	Ductile Iron	1	0.01
P-320-3	130.0	8.0	0.00	Ductile Iron	0	0.00
P-325-3	130.0	8.0	0.00	Ductile Iron	1	0.01
P-330-3	130.0	8.0	0.00	Ductile Iron	1	0.01
P-335-3	130.0	8.0	0.00	Ductile Iron	0	0.00
P-340-3	130.0	12.0	0.00	Ductile Iron	-1	0.00
P-345-3	130.0	12.0	0.00	Ductile Iron	-1	0.00
P-370-3	130.0	8.0	0.00	Ductile Iron	1	0.01
P-380-3	130.0	8.0	0.00	Ductile Iron	0	0.00
P-390-3	130.0	8.0	0.00	Ductile Iron	0	0.00
P-400-3	130.0	8.0	0.00	Ductile Iron	0	0.00
P-410-3	130.0	8.0	0.00	Ductile Iron	1	0.01
P-420-3	130.0	8.0	0.00	Ductile Iron	0	0.00
P-430-3	130.0	8.0	0.00	Ductile Iron	0	0.00
P-440-3	130.0	8.0	0.00	Ductile Iron	0	0.00
ZONE 5 MODELED WATER SUPPLY - PUMP TO SYSTEM	130.0	48.0	1.00	Ductile Iron	0	0.00

Appendix C - For Reference Only

Active Scenario: Peak Hour Demand - PU II

FlexTable: Pipe Table

Label	Hazen-Williams C	Diameter (in)	Length (User Defined) (ft)	Material	Flow (gpm)	Velocity (ft/s)
ZONE 5 MODELED WATER SUPPLY - RES TO PUMP	130.0	48.0	1.00	Ductile Iron	0	0.00

Appendix C - For Reference Only

Active Scenario: Average Day Demand - PU II & III

FlexTable: Pipe Table

Label	Hazen-Williams C	Diameter (in)	Length (User Defined) (ft)	Material	Flow (gpm)	Velocity (ft/s)
MODELED ZONE 4 WATER SUPPLY	130.0	16.0	1,750.00	Ductile Iron	1,362	2.17
P-20-EX	130.0	16.0	306.00	Ductile Iron	-311	0.50
P-30-EX	130.0	16.0	450.00	Ductile Iron	94	0.15
P-40-EX	130.0	16.0	368.00	Ductile Iron	94	0.15
P-50-EX	150.0	16.0	564.00	PVC	-94	0.15
P-60-EX	150.0	12.0	165.00	PVC	0	0.00
P-65-EX	150.0	12.0	477.00	PVC	0	0.00
P-70-EX	150.0	12.0	392.00	PVC	56	0.16
P-80-EX	150.0	12.0	373.00	PVC	98	0.28
P-90-EX	150.0	12.0	557.00	PVC	-98	0.28
P-100-2	130.0	8.0	301.00	Ductile Iron	167	1.06
P-100-3	130.0	12.0	203.00	Ductile Iron	0	0.00
P-100-EX	130.0	12.0	483.00	Ductile Iron	-98	0.28
P-101-2	130.0	16.0	386.00	Ductile Iron	94	0.15
P-105-2	130.0	12.0	299.00	Ductile Iron	-185	0.52
P-110-2	130.0	12.0	277.00	Ductile Iron	-284	0.81
P-110-3	130.0	12.0	0.00	Ductile Iron	0	0.00
P-110-EX	130.0	12.0	0.00	Ductile Iron	-98	0.28
P-111-2	130.0	16.0	243.00	Ductile Iron	94	0.15
P-115-EX	130.0	12.0	0.00	Ductile Iron	-232	0.66
P-120-2	130.0	12.0	319.00	Ductile Iron	53	0.15
P-120-3	130.0	12.0	0.00	Ductile Iron	0	0.00
P-120-EX	130.0	12.0	442.00	Ductile Iron	-232	0.66
P-121-2	130.0	16.0	708.00	Ductile Iron	-441	0.70
P-125-EX	130.0	12.0	0.00	Ductile Iron	-312	0.89
P-130-2	130.0	12.0	319.00	Ductile Iron	-41	0.12
P-130-3	130.0	12.0	0.00	Ductile Iron	-8	0.02
P-130-EX	130.0	12.0	0.00	Ductile Iron	0	0.00
P-131-2	130.0	16.0	2,109.00	Ductile Iron	-884	1.41
P-140-2	130.0	12.0	307.00	Ductile Iron	-405	1.15
P-140-3	130.0	12.0	0.00	Ductile Iron	-87	0.25
P-145-2	130.0	12.0	184.00	Ductile Iron	-144	0.41
P-145-3	130.0	12.0	0.00	Ductile Iron	-59	0.17
P-145-EX	130.0	16.0	2,609.00	Ductile Iron	0	0.00
P-150-2	130.0	12.0	0.00	Ductile Iron	-123	0.35
P-150-3	130.0	12.0	0.00	Ductile Iron	-153	0.43
P-150-EX	130.0	16.0	412.00	Ductile Iron	0	0.00
P-160-2	130.0	12.0	351.00	Ductile Iron	123	0.35
P-160-3	130.0	12.0	0.00	Ductile Iron	-134	0.38
P-160-EX	130.0	16.0	1,528.00	Ductile Iron	-478	0.76
P-165-2	130.0	12.0	0.00	Ductile Iron	182	0.52
P-170-2	130.0	12.0	0.00	Ductile Iron	86	0.24
P-170-3	130.0	8.0	0.00	Ductile Iron	-28	0.18
P-170-EX	140.0	16.0	5,280.00	Asbestos Cement	-478	0.76

Appendix C - For Reference Only

Active Scenario: Average Day Demand - PU II & III

FlexTable: Pipe Table

Label	Hazen-Williams C	Diameter (in)	Length (User Defined) (ft)	Material	Flow (gpm)	Velocity (ft/s)
P-175-2	130.0	12.0	335.00	Ductile Iron	144	0.41
P-175-2	130.0	12.0	0.00	Ductile Iron	-96	0.27
P-175-EX	130.0	16.0	1,254.00	Ductile Iron	-478	0.76
P-180-2	130.0	12.0	0.00	Ductile Iron	-145	0.41
P-180-3	130.0	8.0	0.00	Ductile Iron	-42	0.27
P-180-EX	130.0	6.0	0.00	Ductile Iron	0	0.00
P-190-3	130.0	8.0	0.00	Ductile Iron	-12	0.08
P-190-EX	130.0	6.0	0.00	Ductile Iron	0	0.00
P-195-2	130.0	12.0	0.00	Ductile Iron	39	0.11
P-200-2	130.0	12.0	457.00	Ductile Iron	-115	0.32
P-200-3	130.0	8.0	0.00	Ductile Iron	-32	0.20
P-210-3	130.0	8.0	0.00	Ductile Iron	-32	0.20
P-220-2	130.0	12.0	0.00	Ductile Iron	-289	0.82
P-220-3	130.0	8.0	0.00	Ductile Iron	-80	0.51
P-225-2	130.0	12.0	507.00	Ductile Iron	-443	1.26
P-230-2	130.0	12.0	0.00	Ductile Iron	348	0.99
P-230-3	130.0	8.0	0.00	Ductile Iron	-80	0.51
P-240-3	130.0	8.0	0.00	Ductile Iron	-29	0.19
P-250-3	130.0	8.0	0.00	Ductile Iron	-29	0.19
P-260-3	130.0	8.0	0.00	Ductile Iron	19	0.12
P-265-3	130.0	8.0	0.00	Ductile Iron	0	0.00
P-270-3	130.0	8.0	0.00	Ductile Iron	19	0.12
P-280-3	130.0	8.0	0.00	Ductile Iron	-48	0.31
P-290-3	130.0	8.0	0.00	Ductile Iron	-33	0.21
P-300-3	130.0	8.0	0.00	Ductile Iron	-9	0.06
P-310-3	130.0	8.0	0.00	Ductile Iron	-9	0.06
P-315-3	130.0	8.0	0.00	Ductile Iron	10	0.07
P-320-3	130.0	8.0	0.00	Ductile Iron	9	0.06
P-325-3	130.0	8.0	0.00	Ductile Iron	19	0.12
P-330-3	130.0	8.0	0.00	Ductile Iron	-14	0.09
P-335-3	130.0	8.0	0.00	Ductile Iron	-24	0.15
P-340-3	130.0	12.0	0.00	Ductile Iron	79	0.23
P-345-3	130.0	12.0	0.00	Ductile Iron	-56	0.16
P-370-3	130.0	8.0	0.00	Ductile Iron	31	0.20
P-380-3	130.0	8.0	0.00	Ductile Iron	73	0.46
P-390-3	130.0	8.0	0.00	Ductile Iron	-3	0.02
P-400-3	130.0	8.0	0.00	Ductile Iron	93	0.60
P-410-3	130.0	8.0	0.00	Ductile Iron	-42	0.27
P-420-3	130.0	8.0	0.00	Ductile Iron	-39	0.25
P-430-3	130.0	8.0	0.00	Ductile Iron	41	0.26
P-440-3	130.0	8.0	0.00	Ductile Iron	80	0.51
ZONE 5 MODELED WATER SUPPLY - PUMP TO SYSTEM	130.0	48.0	1.00	Ductile Iron	312	0.06

Appendix C - For Reference Only

Active Scenario: Average Day Demand - PU II & III

FlexTable: Pipe Table

Label	Hazen-Williams C	Diameter (in)	Length (User Defined) (ft)	Material	Flow (gpm)	Velocity (ft/s)
ZONE 5 MODELED WATER SUPPLY - RES TO PUMP	130.0	48.0	1.00	Ductile Iron	312	0.06

Appendix C - For Reference Only

Active Scenario: Maximum Day Demand - PU II & III

FlexTable: Pipe Table

Label	Hazen-Williams C	Diameter (in)	Length (User Defined) (ft)	Material	Flow (gpm)	Velocity (ft/s)
MODELED ZONE 4 WATER SUPPLY	130.0	16.0	1,750.00	Ductile Iron	2,417	3.86
P-20-EX	130.0	16.0	306.00	Ductile Iron	-519	0.83
P-30-EX	130.0	16.0	450.00	Ductile Iron	296	0.47
P-40-EX	130.0	16.0	368.00	Ductile Iron	296	0.47
P-50-EX	150.0	16.0	564.00	PVC	-296	0.47
P-60-EX	150.0	12.0	165.00	PVC	180	0.51
P-65-EX	150.0	12.0	477.00	PVC	180	0.51
P-70-EX	150.0	12.0	392.00	PVC	223	0.63
P-80-EX	150.0	12.0	373.00	PVC	305	0.87
P-90-EX	150.0	12.0	557.00	PVC	-305	0.87
P-100-2	130.0	8.0	301.00	Ductile Iron	330	2.11
P-100-3	130.0	12.0	203.00	Ductile Iron	127	0.36
P-100-EX	130.0	12.0	483.00	Ductile Iron	-305	0.87
P-101-2	130.0	16.0	386.00	Ductile Iron	116	0.19
P-105-2	130.0	12.0	299.00	Ductile Iron	-372	1.06
P-110-2	130.0	12.0	277.00	Ductile Iron	-569	1.61
P-110-3	130.0	12.0	0.00	Ductile Iron	-127	0.36
P-110-EX	130.0	12.0	0.00	Ductile Iron	-305	0.87
P-111-2	130.0	16.0	243.00	Ductile Iron	116	0.19
P-115-EX	130.0	12.0	0.00	Ductile Iron	-692	1.96
P-120-2	130.0	12.0	319.00	Ductile Iron	107	0.30
P-120-3	130.0	12.0	0.00	Ductile Iron	-127	0.36
P-120-EX	130.0	12.0	442.00	Ductile Iron	-692	1.96
P-121-2	130.0	16.0	708.00	Ductile Iron	-710	1.13
P-125-EX	130.0	12.0	0.00	Ductile Iron	-931	2.64
P-130-2	130.0	12.0	319.00	Ductile Iron	-81	0.23
P-130-3	130.0	12.0	0.00	Ductile Iron	-104	0.29
P-130-EX	130.0	12.0	0.00	Ductile Iron	0	0.00
P-131-2	130.0	16.0	2,109.00	Ductile Iron	-1,568	2.50
P-140-2	130.0	12.0	307.00	Ductile Iron	-815	2.31
P-140-3	130.0	12.0	0.00	Ductile Iron	-307	0.87
P-145-2	130.0	12.0	184.00	Ductile Iron	-291	0.82
P-145-3	130.0	12.0	0.00	Ductile Iron	-224	0.64
P-145-EX	130.0	16.0	2,609.00	Ductile Iron	0	0.00
P-150-2	130.0	12.0	0.00	Ductile Iron	-245	0.70
P-150-3	130.0	12.0	0.00	Ductile Iron	-434	1.23
P-150-EX	130.0	16.0	412.00	Ductile Iron	0	0.00
P-160-2	130.0	12.0	351.00	Ductile Iron	245	0.70
P-160-3	130.0	12.0	0.00	Ductile Iron	-387	1.10
P-160-EX	130.0	16.0	1,528.00	Ductile Iron	-849	1.35
P-165-2	130.0	12.0	0.00	Ductile Iron	363	1.03
P-170-2	130.0	12.0	0.00	Ductile Iron	175	0.50
P-170-3	130.0	8.0	0.00	Ductile Iron	-82	0.52
P-170-EX	140.0	16.0	5,280.00	Asbestos Cement	-849	1.35

Appendix C - For Reference Only

Active Scenario: Maximum Day Demand - PU II & III

FlexTable: Pipe Table

Label	Hazen-Williams C	Diameter (in)	Length (User Defined) (ft)	Material	Flow (gpm)	Velocity (ft/s)
P-175-2	130.0	12.0	335.00	Ductile Iron	291	0.82
P-175-2	130.0	12.0	0.00	Ductile Iron	-189	0.54
P-175-EX	130.0	16.0	1,254.00	Ductile Iron	-849	1.35
P-180-2	130.0	12.0	0.00	Ductile Iron	-287	0.81
P-180-3	130.0	8.0	0.00	Ductile Iron	-130	0.83
P-180-EX	130.0	6.0	0.00	Ductile Iron	0	0.00
P-190-3	130.0	8.0	0.00	Ductile Iron	-36	0.23
P-190-EX	130.0	6.0	0.00	Ductile Iron	0	0.00
P-195-2	130.0	12.0	0.00	Ductile Iron	103	0.29
P-200-2	130.0	12.0	457.00	Ductile Iron	-255	0.72
P-200-3	130.0	8.0	0.00	Ductile Iron	-99	0.63
P-210-3	130.0	8.0	0.00	Ductile Iron	-99	0.63
P-220-2	130.0	12.0	0.00	Ductile Iron	-550	1.56
P-220-3	130.0	8.0	0.00	Ductile Iron	-239	1.53
P-225-2	130.0	12.0	507.00	Ductile Iron	-858	2.43
P-230-2	130.0	12.0	0.00	Ductile Iron	721	2.04
P-230-3	130.0	8.0	0.00	Ductile Iron	-239	1.53
P-240-3	130.0	8.0	0.00	Ductile Iron	-94	0.60
P-250-3	130.0	8.0	0.00	Ductile Iron	-94	0.60
P-260-3	130.0	8.0	0.00	Ductile Iron	47	0.30
P-265-3	130.0	8.0	0.00	Ductile Iron	0	0.00
P-270-3	130.0	8.0	0.00	Ductile Iron	47	0.30
P-280-3	130.0	8.0	0.00	Ductile Iron	-141	0.90
P-290-3	130.0	8.0	0.00	Ductile Iron	-110	0.70
P-300-3	130.0	8.0	0.00	Ductile Iron	-30	0.19
P-310-3	130.0	8.0	0.00	Ductile Iron	-30	0.19
P-315-3	130.0	8.0	0.00	Ductile Iron	32	0.21
P-320-3	130.0	8.0	0.00	Ductile Iron	30	0.19
P-325-3	130.0	8.0	0.00	Ductile Iron	63	0.40
P-330-3	130.0	8.0	0.00	Ductile Iron	-47	0.30
P-335-3	130.0	8.0	0.00	Ductile Iron	-80	0.51
P-340-3	130.0	12.0	0.00	Ductile Iron	203	0.58
P-345-3	130.0	12.0	0.00	Ductile Iron	-43	0.12
P-370-3	130.0	8.0	0.00	Ductile Iron	41	0.26
P-380-3	130.0	8.0	0.00	Ductile Iron	123	0.78
P-390-3	130.0	8.0	0.00	Ductile Iron	-29	0.19
P-400-3	130.0	8.0	0.00	Ductile Iron	209	1.33
P-410-3	130.0	8.0	0.00	Ductile Iron	-82	0.52
P-420-3	130.0	8.0	0.00	Ductile Iron	-73	0.47
P-430-3	130.0	8.0	0.00	Ductile Iron	87	0.56
P-440-3	130.0	8.0	0.00	Ductile Iron	160	1.02
ZONE 5 MODELED WATER SUPPLY - PUMP TO SYSTEM	130.0	48.0	1.00	Ductile Iron	931	0.17

Appendix C - For Reference Only

Active Scenario: Maximum Day Demand - PU II & III

FlexTable: Pipe Table

Label	Hazen-Williams C	Diameter (in)	Length (User Defined) (ft)	Material	Flow (gpm)	Velocity (ft/s)
ZONE 5 MODELED WATER SUPPLY - RES TO PUMP	130.0	48.0	1.00	Ductile Iron	931	0.17

Appendix C - For Reference Only

Active Scenario: Peak Hour Demand - PU II & III

FlexTable: Pipe Table

Label	Hazen-Williams C	Diameter (in)	Length (User Defined) (ft)	Material	Flow (gpm)	Velocity (ft/s)
MODELED ZONE						
4 WATER SUPPLY	130.0	16.0	1,750.00	Ductile Iron	2,525	4.03
P-20-EX	130.0	16.0	306.00	Ductile Iron	-381	0.61
P-30-EX	130.0	16.0	450.00	Ductile Iron	1,021	1.63
P-40-EX	130.0	16.0	368.00	Ductile Iron	1,021	1.63
P-50-EX	150.0	16.0	564.00	PVC	-1,021	1.63
P-60-EX	150.0	12.0	165.00	PVC	1,054	2.99
P-65-EX	150.0	12.0	477.00	PVC	1,054	2.99
P-70-EX	150.0	12.0	392.00	PVC	910	2.58
P-80-EX	150.0	12.0	373.00	PVC	1,107	3.14
P-90-EX	150.0	12.0	557.00	PVC	-1,107	3.14
P-100-2	130.0	8.0	301.00	Ductile Iron	553	3.53
P-100-3	130.0	12.0	203.00	Ductile Iron	1,191	3.38
P-100-EX	130.0	12.0	483.00	Ductile Iron	-1,107	3.14
P-101-2	130.0	16.0	386.00	Ductile Iron	-33	0.05
P-105-2	130.0	12.0	299.00	Ductile Iron	-664	1.88
P-110-2	130.0	12.0	277.00	Ductile Iron	-982	2.78
P-110-3	130.0	12.0	0.00	Ductile Iron	-1,191	3.38
P-110-EX	130.0	12.0	0.00	Ductile Iron	-1,107	3.14
P-111-2	130.0	16.0	243.00	Ductile Iron	-33	0.05
P-115-EX	130.0	12.0	0.00	Ductile Iron	-2,477	7.03
P-120-2	130.0	12.0	319.00	Ductile Iron	173	0.49
P-120-3	130.0	12.0	0.00	Ductile Iron	-1,191	3.38
P-120-EX	130.0	12.0	442.00	Ductile Iron	-2,477	7.03
P-121-2	130.0	16.0	708.00	Ductile Iron	-152	0.24
P-125-EX	130.0	12.0	0.00	Ductile Iron	-3,337	9.47
P-130-2	130.0	12.0	319.00	Ductile Iron	-156	0.44
P-130-3	130.0	12.0	0.00	Ductile Iron	-811	2.30
P-130-EX	130.0	12.0	0.00	Ductile Iron	0	0.00
P-131-2	130.0	16.0	2,109.00	Ductile Iron	-1,591	2.54
P-140-2	130.0	12.0	307.00	Ductile Iron	-1,403	3.98
P-140-3	130.0	12.0	0.00	Ductile Iron	-1,232	3.50
P-145-2	130.0	12.0	184.00	Ductile Iron	-473	1.34
P-145-3	130.0	12.0	0.00	Ductile Iron	-948	2.69
P-145-EX	130.0	16.0	2,609.00	Ductile Iron	0	0.00
P-150-2	130.0	12.0	0.00	Ductile Iron	-443	1.26
P-150-3	130.0	12.0	0.00	Ductile Iron	-1,498	4.25
P-150-EX	130.0	16.0	412.00	Ductile Iron	0	0.00
P-160-2	130.0	12.0	351.00	Ductile Iron	443	1.26
P-160-3	130.0	12.0	0.00	Ductile Iron	-1,369	3.88
P-160-EX	130.0	16.0	1,528.00	Ductile Iron	-934	1.49
P-165-2	130.0	12.0	0.00	Ductile Iron	650	1.84
P-170-2	130.0	12.0	0.00	Ductile Iron	270	0.76
P-170-3	130.0	8.0	0.00	Ductile Iron	-284	1.81
P-170-EX	140.0	16.0	5,280.00	Asbestos Cement	-934	1.49

Appendix C - For Reference Only

Active Scenario: Peak Hour Demand - PU II & III

FlexTable: Pipe Table

Label	Hazen-Williams C	Diameter (in)	Length (User Defined) (ft)	Material	Flow (gpm)	Velocity (ft/s)
P-175-2	130.0	12.0	335.00	Ductile Iron	473	1.34
P-175-2	130.0	12.0	0.00	Ductile Iron	-381	1.08
P-175-EX	130.0	16.0	1,254.00	Ductile Iron	-934	1.49
P-180-2	130.0	12.0	0.00	Ductile Iron	-553	1.57
P-180-3	130.0	8.0	0.00	Ductile Iron	-486	3.10
P-180-EX	130.0	6.0	0.00	Ductile Iron	0	0.00
P-190-3	130.0	8.0	0.00	Ductile Iron	-125	0.80
P-190-EX	130.0	6.0	0.00	Ductile Iron	0	0.00
P-195-2	130.0	12.0	0.00	Ductile Iron	294	0.83
P-200-2	130.0	12.0	457.00	Ductile Iron	-560	1.59
P-200-3	130.0	8.0	0.00	Ductile Iron	-371	2.37
P-210-3	130.0	8.0	0.00	Ductile Iron	-371	2.37
P-220-2	130.0	12.0	0.00	Ductile Iron	-900	2.55
P-220-3	130.0	8.0	0.00	Ductile Iron	-860	5.49
P-225-2	130.0	12.0	507.00	Ductile Iron	-1,439	4.08
P-230-2	130.0	12.0	0.00	Ductile Iron	1,376	3.90
P-230-3	130.0	8.0	0.00	Ductile Iron	-860	5.49
P-240-3	130.0	8.0	0.00	Ductile Iron	-361	2.30
P-250-3	130.0	8.0	0.00	Ductile Iron	-361	2.30
P-260-3	130.0	8.0	0.00	Ductile Iron	128	0.82
P-265-3	130.0	8.0	0.00	Ductile Iron	0	0.00
P-270-3	130.0	8.0	0.00	Ductile Iron	128	0.82
P-280-3	130.0	8.0	0.00	Ductile Iron	-489	3.12
P-290-3	130.0	8.0	0.00	Ductile Iron	-448	2.86
P-300-3	130.0	8.0	0.00	Ductile Iron	-122	0.78
P-310-3	130.0	8.0	0.00	Ductile Iron	-122	0.78
P-315-3	130.0	8.0	0.00	Ductile Iron	125	0.79
P-320-3	130.0	8.0	0.00	Ductile Iron	122	0.78
P-325-3	130.0	8.0	0.00	Ductile Iron	246	1.57
P-330-3	130.0	8.0	0.00	Ductile Iron	-202	1.29
P-335-3	130.0	8.0	0.00	Ductile Iron	-326	2.08
P-340-3	130.0	12.0	0.00	Ductile Iron	421	1.19
P-345-3	130.0	12.0	0.00	Ductile Iron	144	0.41
P-370-3	130.0	8.0	0.00	Ductile Iron	-166	1.06
P-380-3	130.0	8.0	0.00	Ductile Iron	32	0.20
P-390-3	130.0	8.0	0.00	Ductile Iron	-234	1.50
P-400-3	130.0	8.0	0.00	Ductile Iron	549	3.51
P-410-3	130.0	8.0	0.00	Ductile Iron	-197	1.26
P-420-3	130.0	8.0	0.00	Ductile Iron	-212	1.35
P-430-3	130.0	8.0	0.00	Ductile Iron	68	0.44
P-440-3	130.0	8.0	0.00	Ductile Iron	280	1.79
ZONE 5 MODELED WATER SUPPLY - PUMP TO SYSTEM	130.0	48.0	1.00	Ductile Iron	3,337	0.59

Appendix C - For Reference Only

Active Scenario: Peak Hour Demand - PU II & III

FlexTable: Pipe Table

Label	Hazen-Williams C	Diameter (in)	Length (User Defined) (ft)	Material	Flow (gpm)	Velocity (ft/s)
ZONE 5 MODELED WATER SUPPLY - RES TO PUMP	130.0	48.0	1.00	Ductile Iron	3,337	0.59

Appendix C - For Reference Only

Active Scenario: Peak Hour Demand - Multistory Scenerio - PU II & III

FlexTable: Pipe Table

Label	Hazen-Williams C	Diameter (in)	Length (User Defined) (ft)	Material	Flow (gpm)	Velocity (ft/s)
MODELED ZONE						
4 WATER SUPPLY	130.0	16.0	1,750.00	Ductile Iron	2,525	4.03
P-20-EX	130.0	16.0	306.00	Ductile Iron	-381	0.61
P-30-EX	130.0	16.0	450.00	Ductile Iron	1,021	1.63
P-40-EX	130.0	16.0	368.00	Ductile Iron	1,021	1.63
P-50-EX	150.0	16.0	564.00	PVC	-1,021	1.63
P-60-EX	150.0	12.0	165.00	PVC	1,054	2.99
P-65-EX	150.0	12.0	477.00	PVC	1,054	2.99
P-70-EX	150.0	12.0	392.00	PVC	910	2.58
P-80-EX	150.0	12.0	373.00	PVC	1,107	3.14
P-90-EX	150.0	12.0	557.00	PVC	-1,107	3.14
P-100-2	130.0	8.0	301.00	Ductile Iron	553	3.53
P-100-3	130.0	12.0	203.00	Ductile Iron	1,191	3.38
P-100-EX	130.0	12.0	483.00	Ductile Iron	-1,107	3.14
P-101-2	130.0	16.0	386.00	Ductile Iron	-33	0.05
P-105-2	130.0	12.0	299.00	Ductile Iron	-664	1.88
P-110-2	130.0	12.0	277.00	Ductile Iron	-982	2.78
P-110-3	130.0	12.0	0.00	Ductile Iron	-1,191	3.38
P-110-EX	130.0	12.0	0.00	Ductile Iron	-1,107	3.14
P-111-2	130.0	16.0	243.00	Ductile Iron	-33	0.05
P-115-EX	130.0	12.0	0.00	Ductile Iron	-2,477	7.03
P-120-2	130.0	12.0	319.00	Ductile Iron	173	0.49
P-120-3	130.0	12.0	0.00	Ductile Iron	-1,191	3.38
P-120-EX	130.0	12.0	442.00	Ductile Iron	-2,477	7.03
P-121-2	130.0	16.0	708.00	Ductile Iron	-152	0.24
P-125-EX	130.0	12.0	0.00	Ductile Iron	-3,337	9.47
P-130-2	130.0	12.0	319.00	Ductile Iron	-156	0.44
P-130-3	130.0	12.0	0.00	Ductile Iron	-811	2.30
P-130-EX	130.0	12.0	0.00	Ductile Iron	0	0.00
P-131-2	130.0	16.0	2,109.00	Ductile Iron	-1,591	2.54
P-140-2	130.0	12.0	307.00	Ductile Iron	-1,403	3.98
P-140-3	130.0	12.0	0.00	Ductile Iron	-1,232	3.50
P-145-2	130.0	12.0	184.00	Ductile Iron	-473	1.34
P-145-3	130.0	12.0	0.00	Ductile Iron	-948	2.69
P-145-EX	130.0	16.0	2,609.00	Ductile Iron	0	0.00
P-150-2	130.0	12.0	0.00	Ductile Iron	-443	1.26
P-150-3	130.0	12.0	0.00	Ductile Iron	-1,498	4.25
P-150-EX	130.0	16.0	412.00	Ductile Iron	0	0.00
P-160-2	130.0	12.0	351.00	Ductile Iron	443	1.26
P-160-3	130.0	12.0	0.00	Ductile Iron	-1,369	3.88
P-160-EX	130.0	16.0	1,528.00	Ductile Iron	-934	1.49
P-165-2	130.0	12.0	0.00	Ductile Iron	650	1.84
P-170-2	130.0	12.0	0.00	Ductile Iron	270	0.76
P-170-3	130.0	8.0	0.00	Ductile Iron	-284	1.81
P-170-EX	140.0	16.0	5,280.00	Asbestos Cement	-934	1.49

P-120-2 of Legacy on 73
 → TPP Line
 Why are Flow here, (SEE SITE Plan) modeled pump

Appendix C - For Reference Only

Active Scenario: Peak Hour Demand - Multistory Scenerio - PU II & III

FlexTable: Pipe Table

Label	Hazen-Williams C	Diameter (in)	Length (User Defined) (ft)	Material	Flow (gpm)	Velocity (ft/s)
P-175-2	130.0	12.0	335.00	Ductile Iron	473	1.34
P-175-2	130.0	12.0	0.00	Ductile Iron	-381	1.08
P-175-EX	130.0	16.0	1,254.00	Ductile Iron	-934	1.49
P-180-2	130.0	12.0	0.00	Ductile Iron	-553	1.57
P-180-3	130.0	8.0	0.00	Ductile Iron	-486	3.10
P-180-EX	130.0	6.0	0.00	Ductile Iron	0	0.00
P-190-3	130.0	8.0	0.00	Ductile Iron	-125	0.80
P-190-EX	130.0	6.0	0.00	Ductile Iron	0	0.00
P-195-2	130.0	12.0	0.00	Ductile Iron	294	0.83
P-200-2	130.0	12.0	457.00	Ductile Iron	-560	1.59
P-200-3	130.0	8.0	0.00	Ductile Iron	-371	2.37
P-210-3	130.0	8.0	0.00	Ductile Iron	-371	2.37
P-220-2	130.0	12.0	0.00	Ductile Iron	-900	2.55
P-220-3	130.0	8.0	0.00	Ductile Iron	-860	5.49
P-225-2	130.0	12.0	507.00	Ductile Iron	-1,439	4.08
P-230-2	130.0	12.0	0.00	Ductile Iron	1,376	3.90
P-230-3	130.0	8.0	0.00	Ductile Iron	-860	5.49
P-240-3	130.0	8.0	0.00	Ductile Iron	-361	2.30
P-250-3	130.0	8.0	0.00	Ductile Iron	-361	2.30
P-260-3	130.0	8.0	0.00	Ductile Iron	128	0.82
P-265-3	130.0	8.0	0.00	Ductile Iron	0	0.00
P-270-3	130.0	8.0	0.00	Ductile Iron	128	0.82
P-280-3	130.0	8.0	0.00	Ductile Iron	-489	3.12
P-290-3	130.0	8.0	0.00	Ductile Iron	-448	2.86
P-300-3	130.0	8.0	0.00	Ductile Iron	-122	0.78
P-310-3	130.0	8.0	0.00	Ductile Iron	-122	0.78
P-315-3	130.0	8.0	0.00	Ductile Iron	125	0.79
P-320-3	130.0	8.0	0.00	Ductile Iron	122	0.78
P-325-3	130.0	8.0	0.00	Ductile Iron	246	1.57
P-330-3	130.0	8.0	0.00	Ductile Iron	-202	1.29
P-335-3	130.0	8.0	0.00	Ductile Iron	-326	2.08
P-340-3	130.0	12.0	0.00	Ductile Iron	421	1.19
P-345-3	130.0	12.0	0.00	Ductile Iron	144	0.41
P-370-3	130.0	8.0	0.00	Ductile Iron	-166	1.06
P-380-3	130.0	8.0	0.00	Ductile Iron	32	0.20
P-390-3	130.0	8.0	0.00	Ductile Iron	-234	1.50
P-400-3	130.0	8.0	0.00	Ductile Iron	549	3.51
P-410-3	130.0	8.0	0.00	Ductile Iron	-197	1.26
P-420-3	130.0	8.0	0.00	Ductile Iron	-212	1.35
P-430-3	130.0	8.0	0.00	Ductile Iron	68	0.44
P-440-3	130.0	8.0	0.00	Ductile Iron	280	1.79
ZONE 5 MODELED WATER SUPPLY - PUMP TO SYSTEM	130.0	48.0	1.00	Ductile Iron	3,337	0.59

Appendix C - For Reference Only

Active Scenario: Peak Hour Demand - Multistory Scenerio - PU II & III

FlexTable: Pipe Table

Label	Hazen-Williams C	Diameter (in)	Length (User Defined) (ft)	Material	Flow (gpm)	Velocity (ft/s)
ZONE 5 MODELED WATER SUPPLY - RES TO PUMP	130.0	48.0	1.00	Ductile Iron	3,337	0.59

Appendix C - For Reference Only

Active Scenario: Maximum Day Plus Fire Flow - PU II

Fire Flow Node FlexTable: Fire Flow Report

Label	Zone	Satisfies Fire Flow Constraints?	Fire Flow (Needed) (gpm)	Fire Flow (Available) (gpm)	Pressure (Calculated Residual) (psi)	Pressure (Calculated Zone Lower Limit) (psi)
EX FH #1 - TEST HYDRANT	Zone	True	2,500	4,483	30	38
EX FH #2 - FLOW HYDRANT	Zone	True	2,500	4,982	30	32
J-10-EX	Zone	True	2,500	4,149	39	30
J-20-EX	Zone	True	2,500	4,125	36	30
J-30-EX	Zone	True	2,500	4,059	33	30
J-40-EX	Zone	True	2,500	4,015	32	30
J-50-EX	Zone	True	2,500	3,993	30	32
J-60-EX	Zone	True	2,500	5,096	36	30
J-70-EX	Zone	True	2,500	5,096	34	30
J-80-EX	Zone	True	2,500	5,096	31	30
J-90-EX	Zone	True	2,500	5,055	30	31
J-100-2	PU2	True	2,500	3,748	37	30
J-100-3	PU3	True	2,500	5,145	30	32
J-100-EX	Zone	True	2,500	5,096	31	30
J-101-2	PU2	True	2,500	3,668	31	30
J-102-2	PU2	True	2,500	3,903	37	30
J-105-2	PU2	True	2,500	3,887	39	30
J-105-EX	Zone	True	2,500	5,096	33	30
J-110-2	PU2	True	2,500	4,214	35	30
J-110-3	PU3	True	2,500	5,239	34	30
J-110-EX	Zone	True	2,500	5,096	34	30
J-111-2	PU2	True	2,500	3,654	30	31
J-120-2	PU2	True	2,500	3,940	35	30
J-120-3	PU3	True	2,500	5,238	33	30
J-120-EX	Zone	True	2,500	5,096	40	30
J-121-2	PU2	True	2,500	3,784	30	30
J-125-EX	Zone	True	2,500	5,096	43	30
J-130-2	PU2	True	2,500	3,913	34	30
J-130-3	PU3	True	2,500	5,230	33	30
J-130-EX	Zone	True	2,500	3,551	30	51
J-135-3	PU3	True	2,500	5,178	30	30
J-140-3	PU3	True	2,500	5,163	30	31
J-150-2	PU2	True	2,500	3,749	33	30
J-150-3	PU3	True	2,500	5,070	30	30
J-150-EX	Zone	True	2,500	5,547	30	32
J-160-2	PU2	True	2,500	3,864	33	30
J-160-3	PU3	True	2,500	5,029	30	32
J-160-EX	Zone	True	2,500	5,064	39	30
J-165-2	PU2	True	2,500	3,743	36	30
J-170-2	PU2	True	2,500	3,863	37	30
J-170-3	PU3	True	2,500	4,775	30	33
J-170-EX	Zone	True	2,500	4,282	49	30
J-175-2	PU2	True	2,500	3,837	34	30
J-180-2	PU2	True	2,500	4,108	33	30

Appendix C - For Reference Only

Active Scenario: Maximum Day Plus Fire Flow - PU II

Fire Flow Node FlexTable: Fire Flow Report

Label	Zone	Satisfies Fire Flow Constraints?	Fire Flow (Needed) (gpm)	Fire Flow (Available) (gpm)	Pressure (Calculated Residual) (psi)	Pressure (Calculated Zone Lower Limit) (psi)
J-180-3	PU3	True	2,500	4,329	30	44
J-190-2	PU2	True	2,500	3,877	33	30
J-190-3	PU3	True	2,500	4,892	30	34
J-200-2	PU2	True	2,500	4,174	30	30
J-200-3	PU3	True	2,500	4,692	30	40
J-210-3	PU3	True	2,500	4,525	30	40
J-220-2	PU2	True	2,500	4,074	31	30
J-220-3	PU3	True	2,500	4,898	30	31
J-230-3	PU3	True	2,500	4,776	30	30
J-235-3	PU3	True	2,500	3,905	30	46
J-240-3	PU3	True	2,500	4,997	30	32
J-245-3	PU3	True	2,500	4,961	30	33
J-250-3	PU3	True	2,500	4,336	30	35
J-260-3	PU3	True	2,500	4,227	30	39
J-265-3	PU3	True	2,500	4,772	30	34
J-270-3	PU3	True	2,500	5,246	35	30
J-290-3	PU3	True	2,500	4,997	30	32
J-300-3	PU3	True	2,500	4,538	30	33
J-310-3	PU3	True	2,500	4,435	30	38
J-320-3	PU3	True	2,500	5,071	30	32
J-330-3	PU3	True	2,500	3,748	30	54

Appendix C - For Reference Only

Active Scenario: Maximum Day Plus Fire Flow - PU II & III

Fire Flow Node FlexTable: Fire Flow Report


Label	Zone	Satisfies Fire Flow Constraints?	Fire Flow (Needed) (gpm)	Fire Flow (Available) (gpm)	Pressure (Calculated Residual) (psi)	Pressure (Calculated Zone Lower Limit) (psi)
EX FH #1 - TEST HYDRANT	Zone	True	2,500	3,924	30	33
EX FH #2 - FLOW HYDRANT	Zone	True	2,500	4,433	30	31
J-10-EX	Zone	True	2,500	4,775	57	30
J-20-EX	Zone	True	2,500	4,777	54	30
J-30-EX	Zone	True	2,500	4,783	52	30
J-40-EX	Zone	True	2,500	4,787	50	30
J-50-EX	Zone	True	2,500	4,790	49	30
J-60-EX	Zone	True	2,500	4,472	37	30
J-70-EX	Zone	True	2,500	4,472	35	30
J-80-EX	Zone	True	2,500	4,472	32	30
J-90-EX	Zone	True	2,500	4,472	30	30
J-100-2	PU2	True	2,500	8,000	30	32
J-100-3	PU3	True	2,500	4,614	30	30
J-100-EX	Zone	True	2,500	4,472	32	30
J-101-2	PU2	True	2,500	8,000	32	32
J-102-2	PU2	True	2,500	8,000	34	34
J-105-2	PU2	True	2,500	8,000	33	31
J-105-EX	Zone	True	2,500	4,472	34	30
J-110-2	PU2	True	2,500	7,720	30	31
J-110-3	PU3	True	2,500	4,615	34	30
J-110-EX	Zone	True	2,500	4,472	34	30
J-111-2	PU2	True	2,500	8,000	32	33
J-120-2	PU2	True	2,500	7,376	30	31
J-120-3	PU3	True	2,500	4,614	34	30
J-120-EX	Zone	True	2,500	4,164	40	30
J-121-2	PU2	True	2,500	8,000	32	33
J-125-EX	Zone	True	2,500	4,165	43	30
J-130-2	PU2	True	2,500	6,999	30	30
J-130-3	PU3	True	2,500	4,606	33	30
J-130-EX	Zone	True	2,500	3,048	30	51
J-135-3	PU3	True	2,500	4,567	30	30
J-140-3	PU3	True	2,500	4,550	30	31
J-150-2	PU2	True	2,500	6,745	30	32
J-150-3	PU3	True	2,500	4,519	30	30
J-150-EX	Zone	True	2,500	4,643	49	30
J-160-2	PU2	True	2,500	7,117	30	34
J-160-3	PU3	True	2,500	4,484	30	31
J-160-EX	Zone	True	2,500	4,733	58	30
J-165-2	PU2	True	2,500	7,916	31	30
J-170-2	PU2	True	2,500	8,000	31	32
J-170-3	PU3	True	2,500	4,273	30	32
J-170-EX	Zone	True	2,500	4,764	66	30
J-175-2	PU2	True	2,500	7,899	30	34
J-180-2	PU2	True	2,500	8,000	33	34

Appendix C - For Reference Only

Active Scenario: Maximum Day Plus Fire Flow - PU II & III

Fire Flow Node FlexTable: Fire Flow Report

Label	Zone	Satisfies Fire Flow Constraints?	Fire Flow (Needed) (gpm)	Fire Flow (Available) (gpm)	Pressure (Calculated Residual) (psi)	Pressure (Calculated Zone Lower Limit) (psi)
J-180-3	PU3	True	2,500	3,682	30	40
J-190-2	PU2	True	2,500	7,843	30	31
J-190-3	PU3	True	2,500	4,364	30	33
J-200-2	PU2	True	2,500	7,858	30	35
J-200-3	PU3	True	2,500	3,989	30	37
J-210-3	PU3	True	2,500	3,947	30	37
J-220-2	PU2	True	2,500	8,000	31	34
J-220-3	PU3	True	2,500	4,358	30	31
J-230-3	PU3	True	2,500	4,247	30	30
J-235-3	PU3	True	2,500	3,342	30	42
J-240-3	PU3	True	2,500	4,477	30	32
J-245-3	PU3	True	2,500	4,444	30	32
J-250-3	PU3	True	2,500	3,778	30	34
J-260-3	PU3	True	2,500	3,642	30	37
J-265-3	PU3	True	2,500	4,288	30	34
J-270-3	PU3	True	2,500	4,743	36	30
J-290-3	PU3	True	2,500	4,438	30	30
J-300-3	PU3	True	2,500	4,066	30	32
J-310-3	PU3	True	2,500	3,853	30	37
J-320-3	PU3	True	2,500	4,525	30	32
J-330-3	PU3	True	2,500	3,376	30	48


 VERIFY w/ F.D. Erickson report
 USED A higher Number

Appendix C - For Reference Only

Active Scenario: Average Day Demand - PU II

FlexTable: PRV Table

Label	Elevation (ft)	Diameter (Valve) (in)	Hydraulic Grade Setting (Initial) (ft)	Status (Calculated)	Flow (gpm)	Hydraulic Grade (From) (ft)	Hydraulic Grade (To) (ft)	Headloss (ft)
PRV-2-EX	1,656.0	16.0	1,755.0	Inactive	0	1,854.2	1,854.2	0.00
PRV-3	1,636.0	12.0	1,755.0	Inactive	0	1,854.2	1,854.2	0.00
PRV-4	1,639.0	12.0	1,755.0	Inactive	0	1,854.2	1,854.2	0.00

Appendix C - For Reference Only

Active Scenario: Maximum Day Demand - PU II

FlexTable: PRV Table

Label	Elevation (ft)	Diameter (Valve) (in)	Hydraulic Grade Setting (Initial) (ft)	Status (Calculated)	Flow (gpm)	Hydraulic Grade (From) (ft)	Hydraulic Grade (To) (ft)	Headloss (ft)
PRV-2-EX	1,656.0	16.0	1,755.0	Inactive	0	1,854.2	1,854.2	0.00
PRV-3	1,636.0	12.0	1,755.0	Inactive	0	1,854.2	1,854.2	0.00
PRV-4	1,639.0	12.0	1,755.0	Inactive	0	1,854.2	1,854.2	0.00

Appendix C - For Reference Only

Active Scenario: Peak Hour Demand - PU II

FlexTable: PRV Table

Label	Elevation (ft)	Diameter (Valve) (in)	Hydraulic Grade Setting (Initial) (ft)	Status (Calculated)	Flow (gpm)	Hydraulic Grade (From) (ft)	Hydraulic Grade (To) (ft)	Headloss (ft)
PRV-2-EX	1,656.0	16.0	1,755.0	Inactive	0	1,854.2	1,854.2	0.00
PRV-3	1,636.0	12.0	1,755.0	Inactive	0	1,854.2	1,854.2	0.00
PRV-4	1,639.0	12.0	1,755.0	Inactive	0	1,854.2	1,854.2	0.00

Appendix C - For Reference Only

Active Scenario: Average Day Demand - PU II & III

FlexTable: PRV Table

Label	Elevation (ft)	Diameter (Valve) (in)	Hydraulic Grade Setting (Initial) (ft)	Status (Calculated)	Flow (gpm)	Hydraulic Grade (From) (ft)	Hydraulic Grade (To) (ft)	Headloss (ft)
PRV-2-EX	1,656.0	16.0	1,755.0	Closed	0	1,853.7	1,762.1	0.00
PRV-3	1,636.0	12.0	1,755.0	Closed	0	1,853.5	1,760.9	0.00
PRV-4	1,639.0	12.0	1,755.0	Closed	0	1,853.5	1,760.9	0.00

Appendix C - For Reference Only

Active Scenario: Maximum Day Demand - PU II & III

FlexTable: PRV Table

Label	Elevation (ft)	Diameter (Valve) (in)	Hydraulic Grade Setting (Initial) (ft)	Status (Calculated)	Flow (gpm)	Hydraulic Grade (From) (ft)	Hydraulic Grade (To) (ft)	Headloss (ft)
PRV-2-EX	1,656.0	16.0	1,755.0	Closed	0	1,850.6	1,758.4	0.00
PRV-3	1,636.0	12.0	1,755.0	Active	180	1,849.0	1,755.0	93.94
PRV-4	1,639.0	12.0	1,755.0	Active	127	1,849.0	1,755.0	93.99

Appendix C - For Reference Only

Active Scenario: Peak Hour Demand - PU II & III

FlexTable: PRV Table

Label	Elevation (ft)	Diameter (Valve) (in)	Hydraulic Grade Setting (Initial) (ft)	Status (Calculated)	Flow (gpm)	Hydraulic Grade (From) (ft)	Hydraulic Grade (To) (ft)	Headloss (ft)
PRV-2-EX	1,656.0	16.0	1,755.0	Closed	0	1,815.5	1,757.9	0.00
PRV-3	1,636.0	12.0	1,755.0	Active	1,054	1,797.9	1,755.0	42.90
PRV-4	1,639.0	12.0	1,755.0	Active	1,191	1,797.6	1,755.0	42.57

Appendix C - For Reference Only

Active Scenario: Peak Hour Demand - Multistory Scenerio - PU II & III

FlexTable: PRV Table

Label	Elevation (ft)	Diameter (Valve) (in)	Hydraulic Grade Setting (Initial) (ft)	Status (Calculated)	Flow (gpm)	Hydraulic Grade (From) (ft)	Hydraulic Grade (To) (ft)	Headloss (ft)
PRV-2-EX	1,657.0	16.0	1,755.0	Closed	0	1,815.5	1,757.9	0.00
PRV-3	1,636.0	12.0	1,755.0	Active	1,054	1,797.9	1,755.0	42.90
PRV-4	1,639.0	12.0	1,755.0	Active	1,191	1,797.6	1,755.0	42.57

Appendix C - For Reference Only

Active Scenario: Maximum Day Demand - PU II

FlexTable: Reservoir Table

Label	Elevation (ft)	Zone	Flow (Out net) (gpm)	Hydraulic Grade (ft)
MODELED COS WATER SOURCE - ZONE 4	1,764.0	Zone	2,724	1,764.0
MODELED COS WATER SOURCE - ZONE 5	1,669.4	Zone	0	1,669.4

Appendix C - For Reference Only

Active Scenario: Peak Hour Demand - PU II

FlexTable: Reservoir Table

Label	Elevation (ft)	Zone	Flow (Out net) (gpm)	Hydraulic Grade (ft)
MODELED COS WATER SOURCE - ZONE 4	1,764.0	Zone	4,770	1,764.0
MODELED COS WATER SOURCE - ZONE 5	1,669.4	Zone	0	1,669.4

Appendix C - For Reference Only

Active Scenario: Average Day Demand - PU II & III

FlexTable: Reservoir Table

Label	Elevation (ft)	Zone	Flow (Out net) (gpm)	Hydraulic Grade (ft)
MODELED COS WATER SOURCE - ZONE 4	1,764.0	Zone	1,362	1,764.0
MODELED COS WATER SOURCE - ZONE 5	1,669.4	Zone	312	1,669.4

Appendix C - For Reference Only

Active Scenario: Maximum Day Demand - PU II & III

FlexTable: Reservoir Table

Label	Elevation (ft)	Zone	Flow (Out net) (gpm)	Hydraulic Grade (ft)
MODELED COS WATER SOURCE - ZONE 4	1,764.0	Zone	2,417	1,764.0
MODELED COS WATER SOURCE - ZONE 5	1,669.4	Zone	931	1,669.4

Appendix C - For Reference Only

Active Scenario: Peak Hour Demand - PU II & III

FlexTable: Reservoir Table

Label	Elevation (ft)	Zone	Flow (Out net) (gpm)	Hydraulic Grade (ft)
MODELED COS WATER SOURCE - ZONE 4	1,764.0	Zone	2,525	1,764.0
MODELED COS WATER SOURCE - ZONE 5	1,669.4	Zone	3,337	1,669.4

Appendix C - For Reference Only

Active Scenario: Peak Hour Demand - Multistory Scenerio - PU II & III

FlexTable: Reservoir Table

Label	Elevation (ft)	Zone	Flow (Out net) (gpm)	Hydraulic Grade (ft)
MODELED COS WATER SOURCE - ZONE 4	1,764.0	Zone	2,525	1,764.0
MODELED COS WATER SOURCE - ZONE 5	1,669.4	Zone	3,337	1,669.4

Appendix C - For Reference Only

APPENDIX D

FIRE HYDRANT FLOW TEST RESULTS

Appendix C - For Reference Only

Arizona Flow Testing LLC

HYDRANT FLOW TEST REPORT

Project Name: One Scottsdale
Project Address: Scottsdale Rd. & Thompson Peak Pkwy., Scottsdale, Arizona 85255
Client Project No: 154391
Arizona Flow Testing Project No.: 15134
Flow Test Permit No: C48958
Date and time flow test conducted: October 30, 2015 at 7:30 AM
Data is current and reliable until: April 30, 2016
Conducted by: Floyd Vaughan-Arizona Flow Testing, LLC (480-250-8154)
Witnessed by: Larry Frandle-City of Scottsdale-Inspector (602-541-4942)

Raw Test Data

Static Pressure: **80.0 PSI**
(Measured in pounds per square inch)

Residual Pressure: **68.0 PSI**
(Measured in pounds per square inch)

Pitot Pressure: **42.0 PSI**
(Measured in pounds per square inch)

Diffuser Orifice Diameter: One (4 inch)
(Measured in inches)

Coefficient of Diffuser: .90

Flowing GPM: **2,785 GPM**
(Measured in gallons per minute)

GPM @ 20 PSI: **6,641 GPM**

Data with 10 % Safety Factor

Static Pressure: **72.0 PSI**
(Measured in pounds per square inch)

Residual Pressure: **60.0 PSI**
(Measured in pounds per square inch)

Distance between hydrants: 660 Feet

Main size: 12 Inch


Flowing GPM: **2,785 GPM**

GPM @ 20 PSI: **6,147 GPM**

Scottsdale requires a maximum Static Pressure of 72 PSI for AFES Design.

Flow Test Location

North ↑

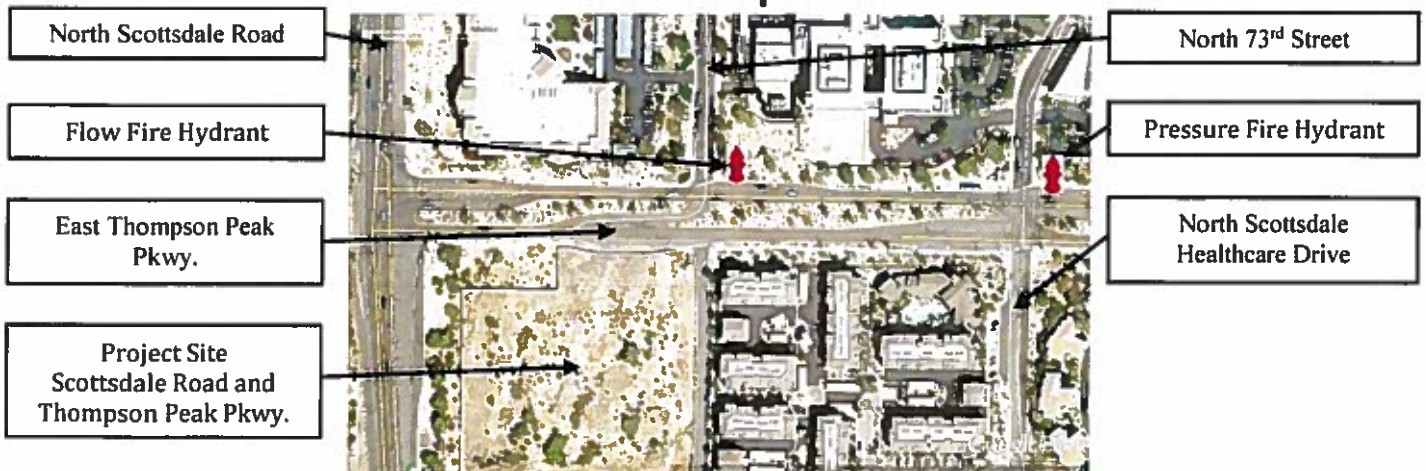


Arizona Flow Testing LLC 480-250-8154 www.azflowtest.com floyd@azflowtest.com

Appendix C - For Reference Only

PLATE 1

VICINITY MAP

Appendix C - For Reference Only

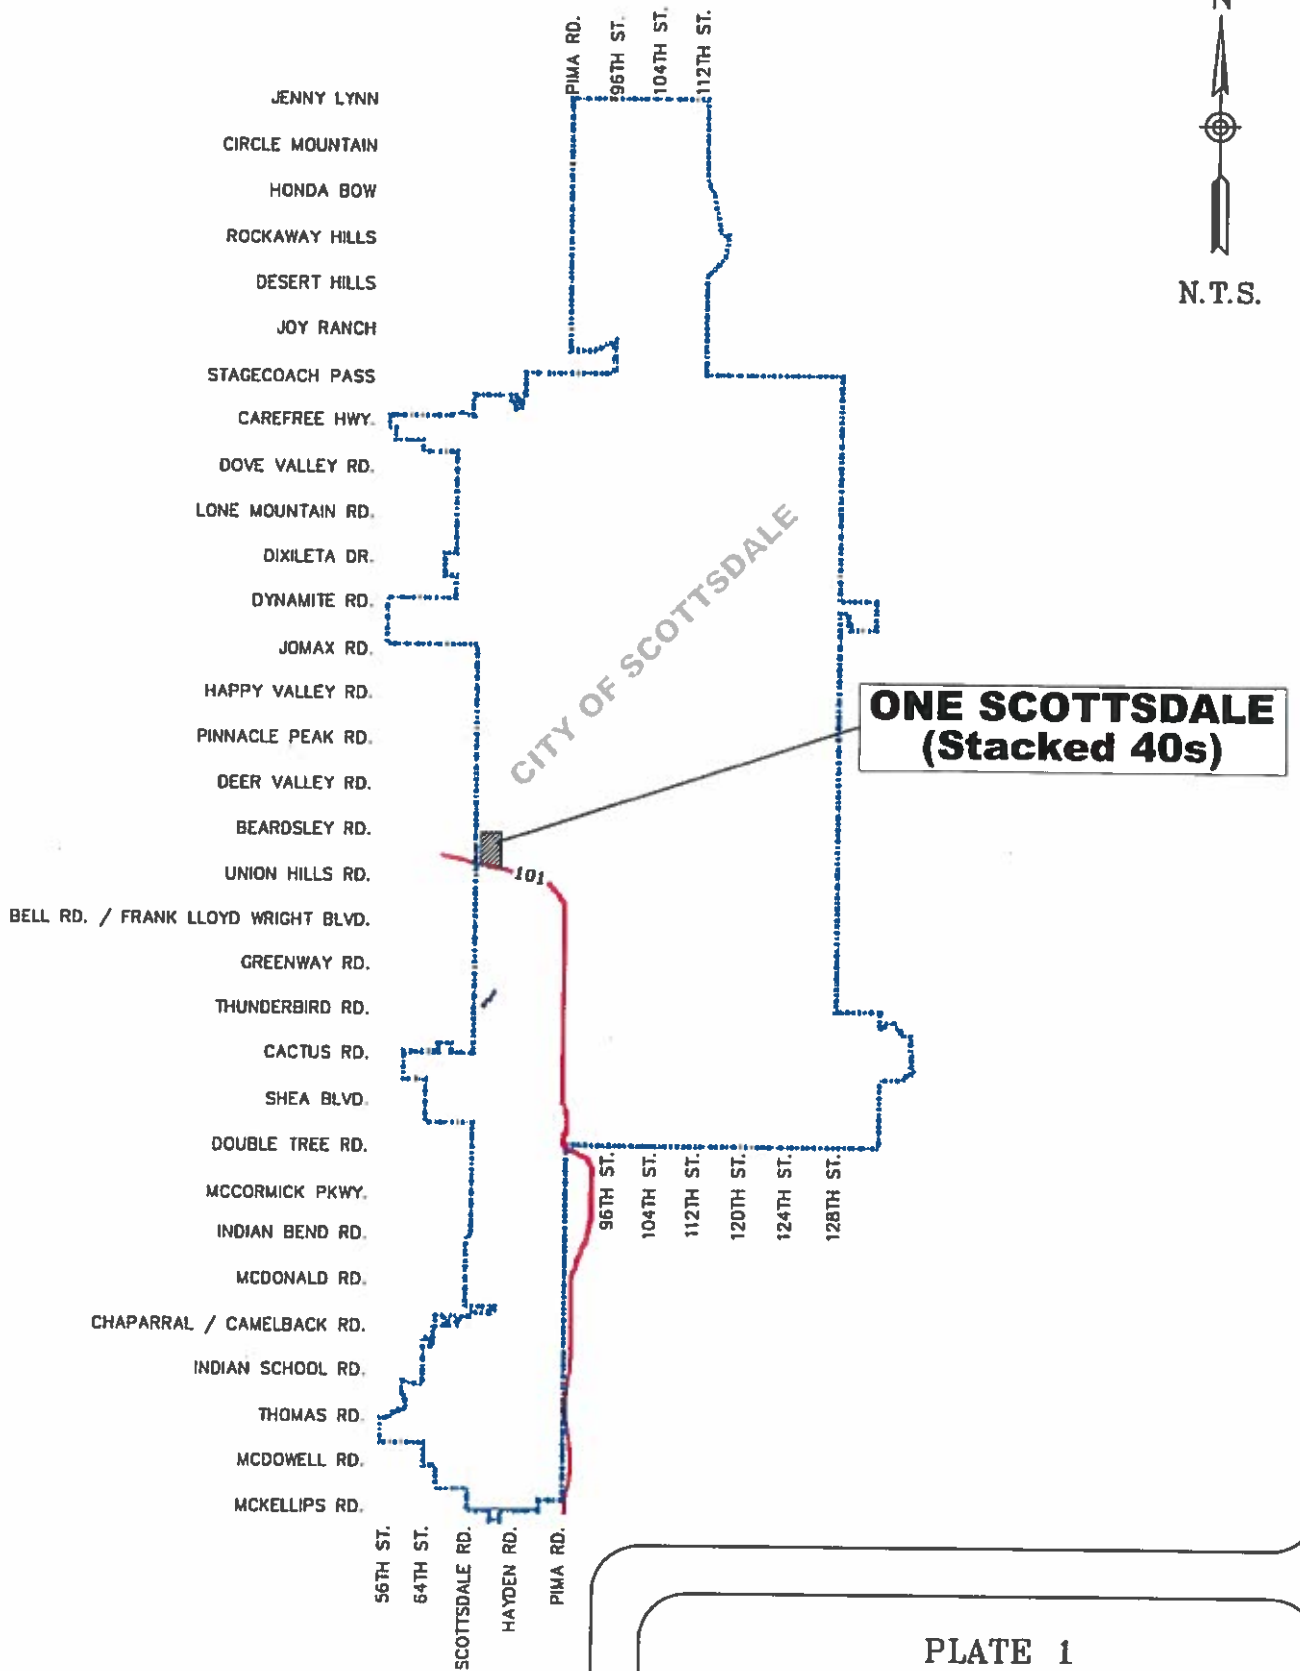


S:\2022\1071584-01\Project Support\Server\UP\1th\Submitted - ID\Embld\1071584-01 WASTEWATER PLATE 1_20190728.dwg

PLATE 1	
ONE SCOTTSDALE (Stacked 40s) VICINITY MAP	WOOD/PATEL & ASSOCIATES Civil Engineers Hydrologists Land Surveyors Construction Managers (602) 336-8800

Appendix C - For Reference Only

PLATE 2

MODELED ON-SITE LAND USE PLAN

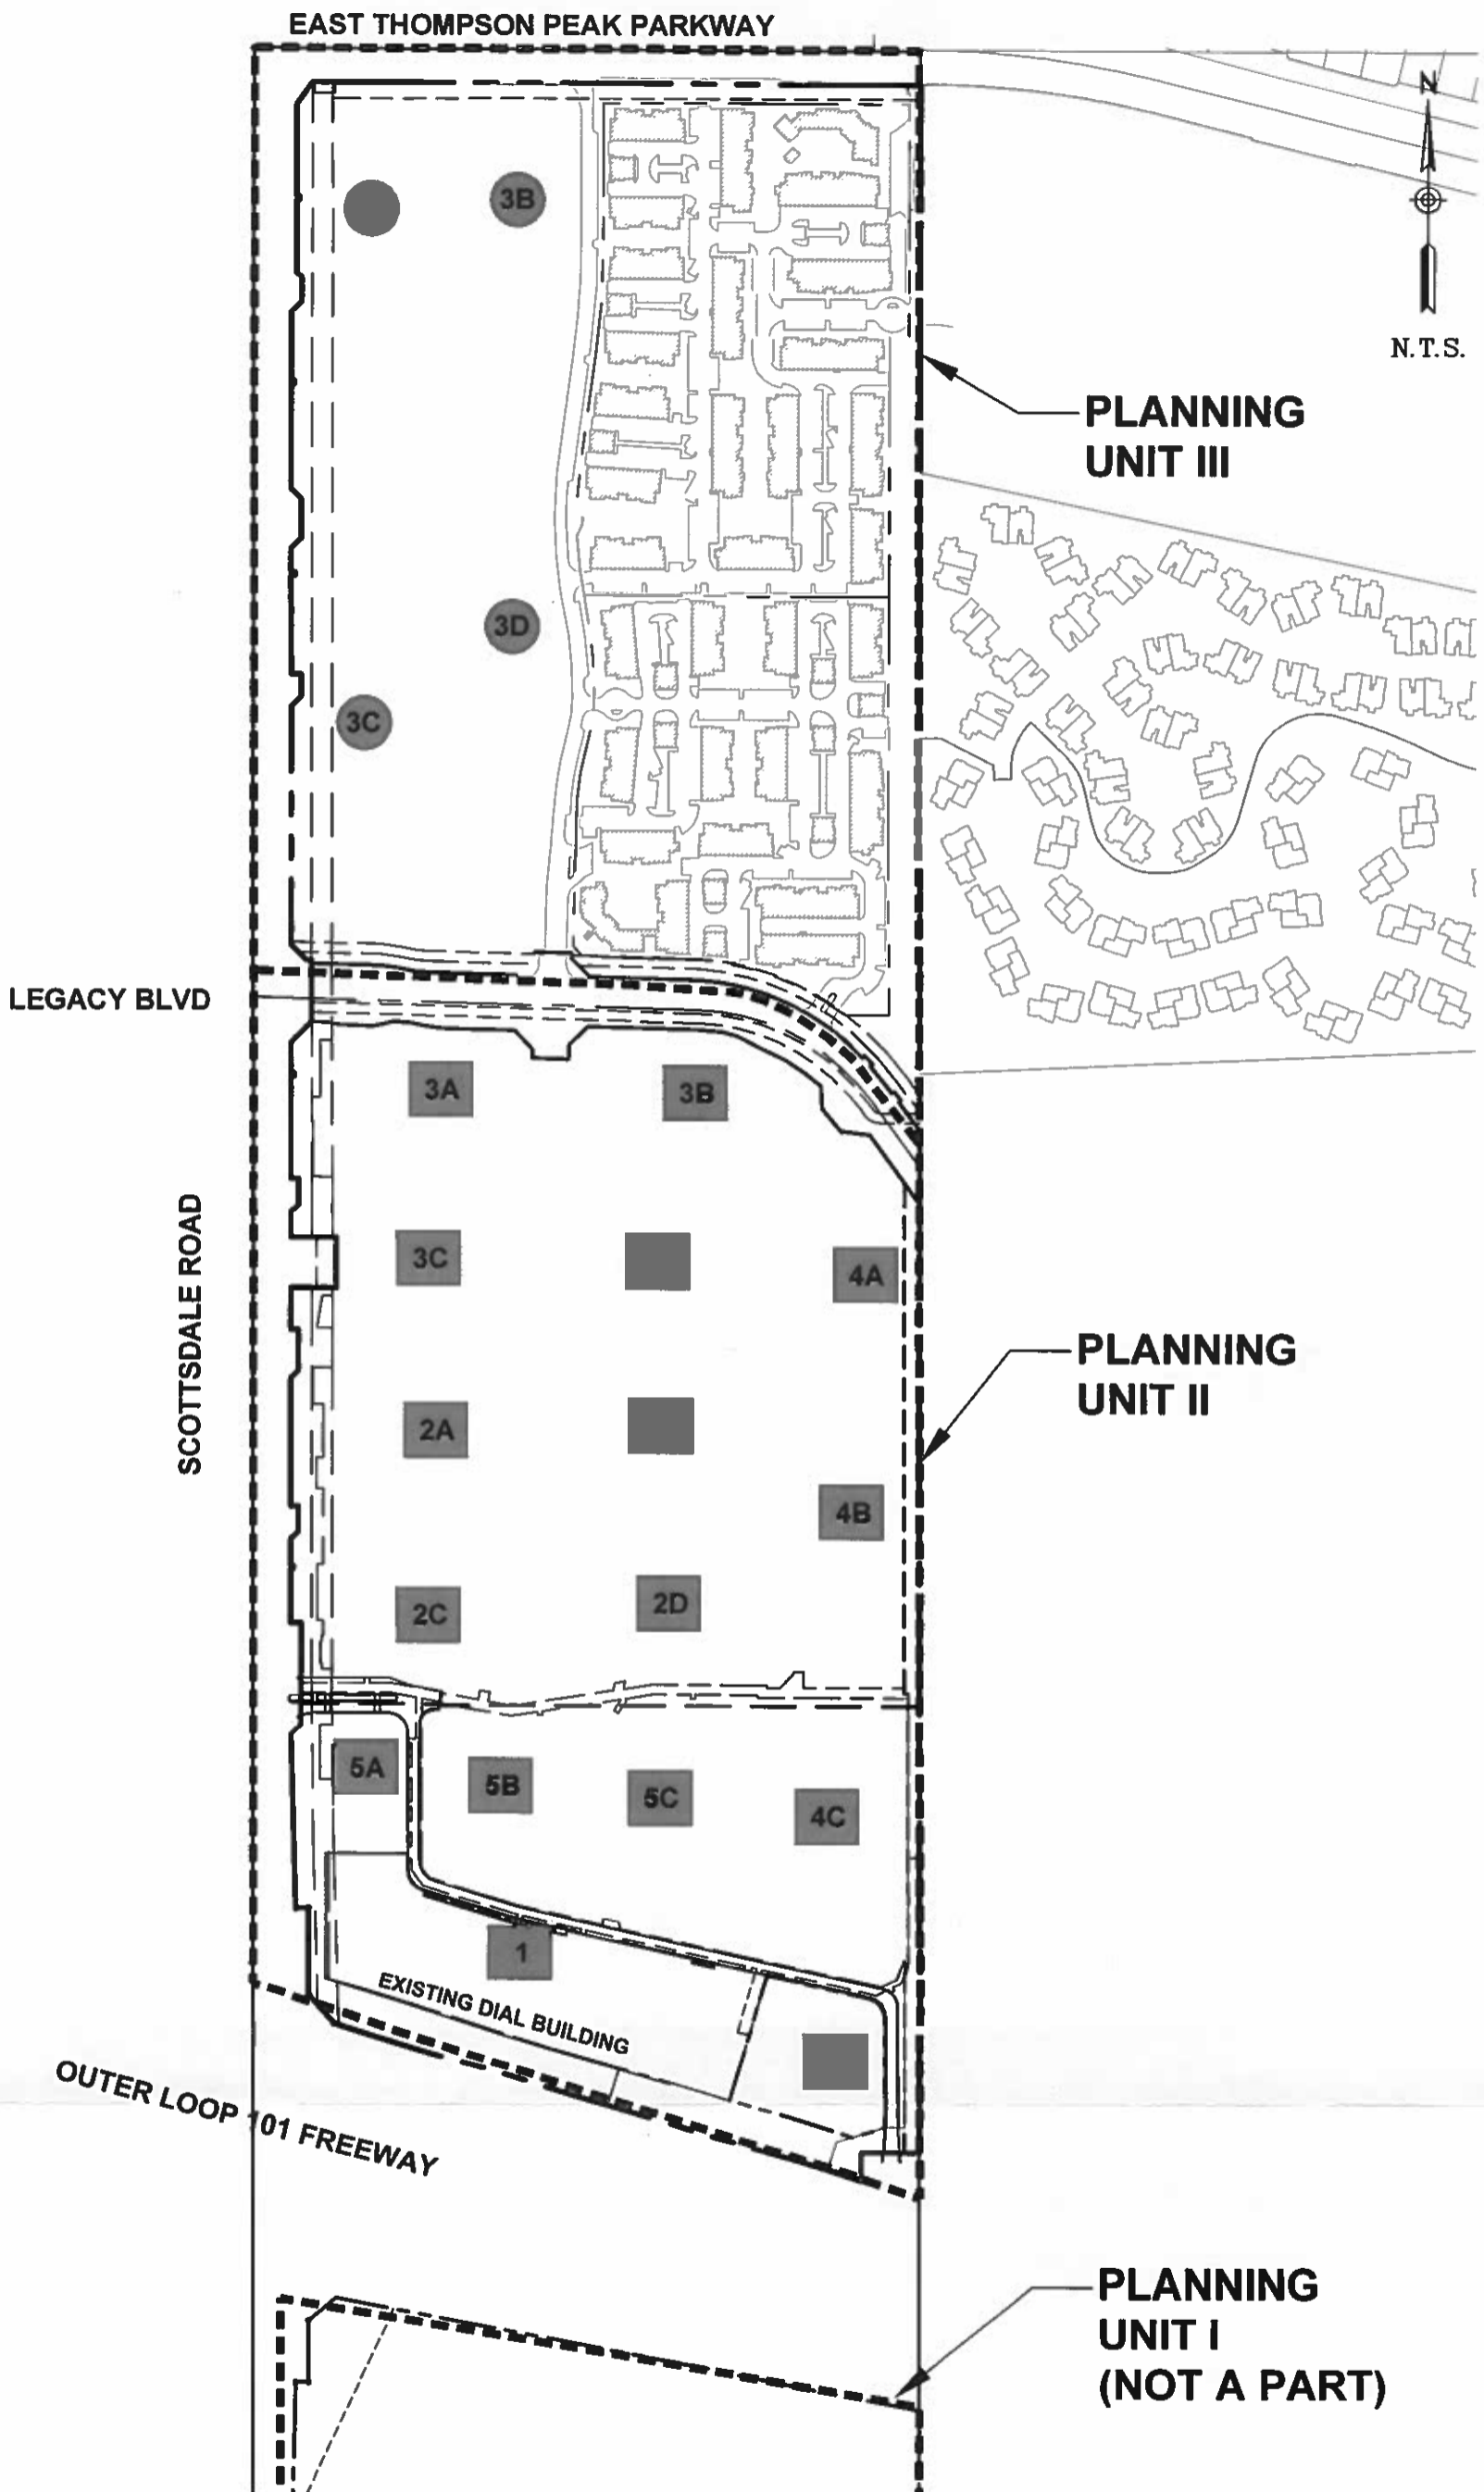

- 3 PHASE AREA IN PLANNING UNIT III
- 1 PHASE AREA IN PLANNING UNIT II
- PLANNING UNIT LINE

<p>PLATE 2</p> <p>JANUARY 2016</p>	
<p>ONE SCOTTSDALE MODELED ON-SITE LAND USE PLAN</p>	<p>WOOD/PATEL ASSOCIATES Civil Engineers Hydrologists Lead Surveyors Construction Managers (602) 925-9500</p>


N:\2016\USCAR\Project Support\Reports\Draw 002\00001\001 - Network - Plate 2.dwg

Appendix C - For Reference Only

PLATE 3


MASTER ON-SITE WATER PLAN EXHIBIT

Appendix C - For Reference Only

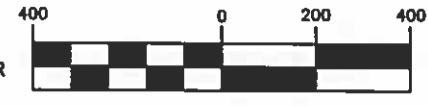

1 inch = 400 ft.

PRELIMINARY
NOT FOR
CONSTRUCTION
OR RECORDING

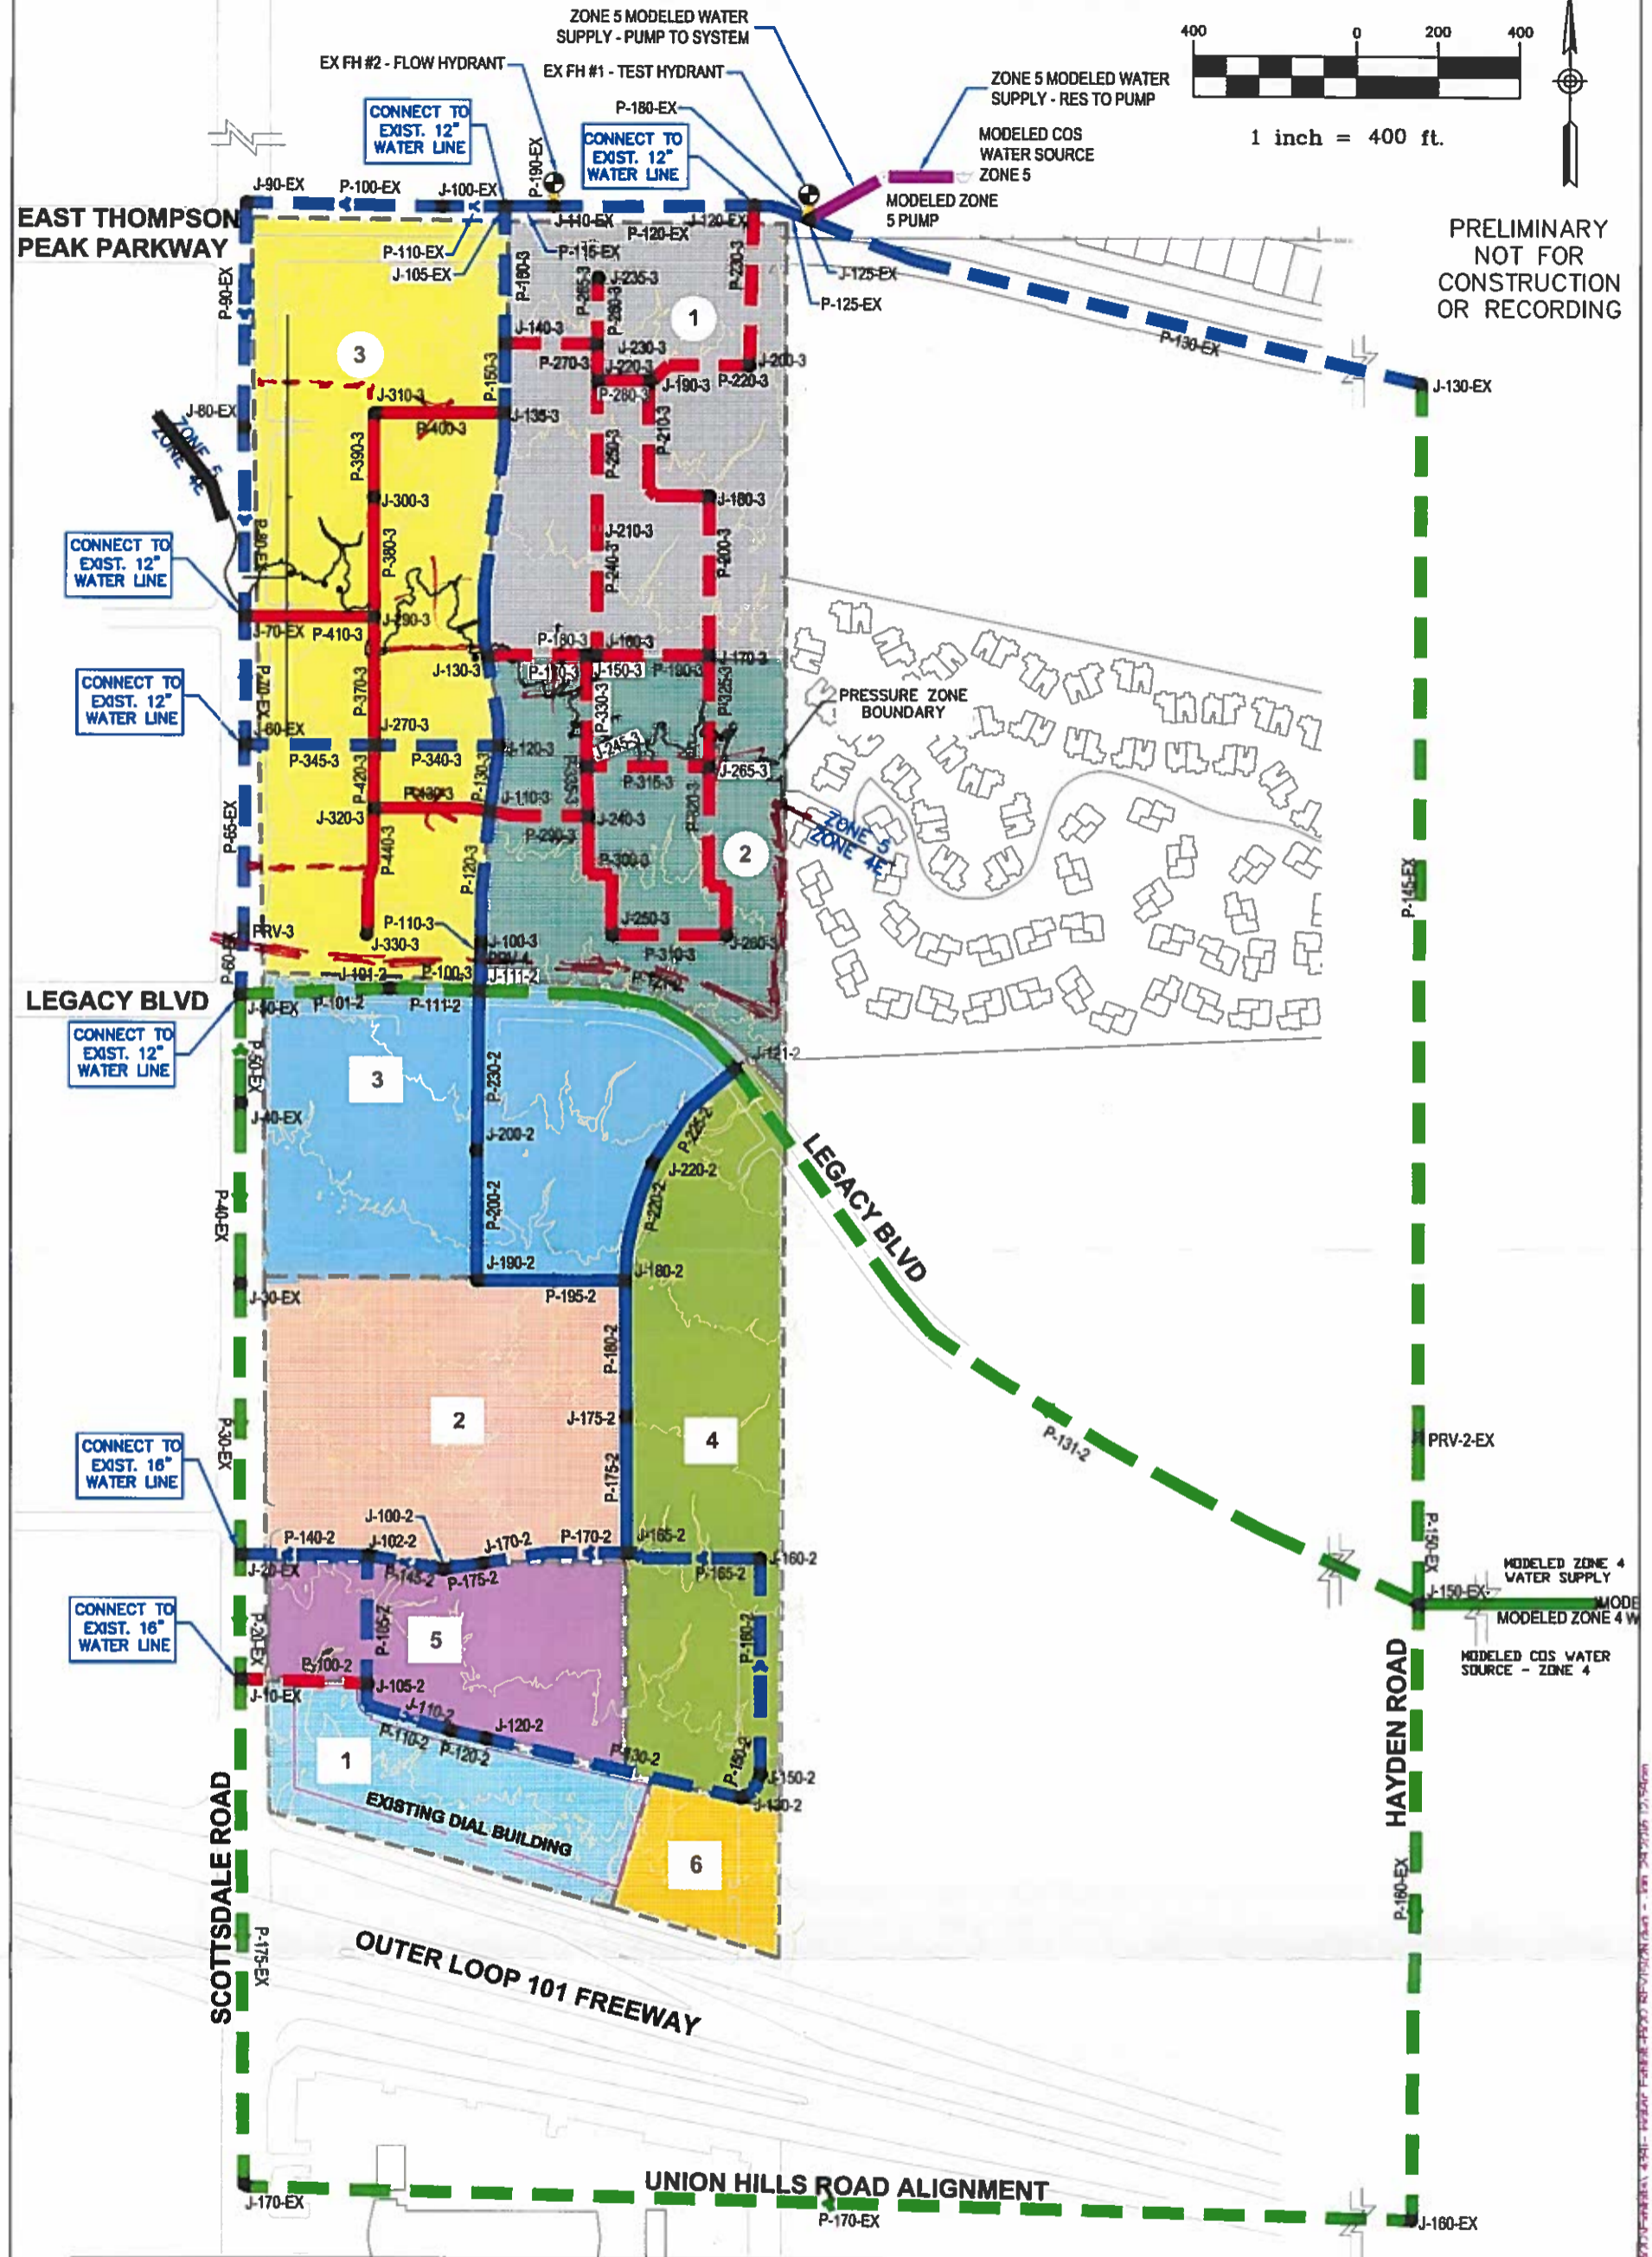


LEGEND		DIAMETER (IN)		EXISTING PIPE	PROPOSED PIPE
● JXXX-EX	JUNCTION NODE ALONG EXIST. PIPE	8	[Red line]	[Red line]	[Red line]
● JXXX-2	JUNCTION NODE - PLANNING UNIT II	12	[Blue line]	[Blue line]	[Blue line]
● JXXX-3	JUNCTION NODE - PLANNING UNIT III	16	[Green line]	[Green line]	[Green line]
● PXXX-EX	EXISTING PIPE				
● PXXX-2	PROPOSED PIPE - PLANNING UNIT II				
● PXXX-3	PROPOSED PIPE - PLANNING UNIT III				
⊗	PRESSURE REDUCING VALVE				
1	PHASE AREA IN PLANNING UNIT III				
2	PHASE AREA IN PLANNING UNIT II				

PLATE 3
January 2016

**ONE SCOTTSDALE
MASTER ON-SITE
WATER PLAN EXHIBIT**

WOOD/PATEL ASSOCIATES
Civil Engineers
Hydrologists
Land Surveyors
Construction Managers
(602) 355-8500

EXHIBIT 1 – VICINITY MAP

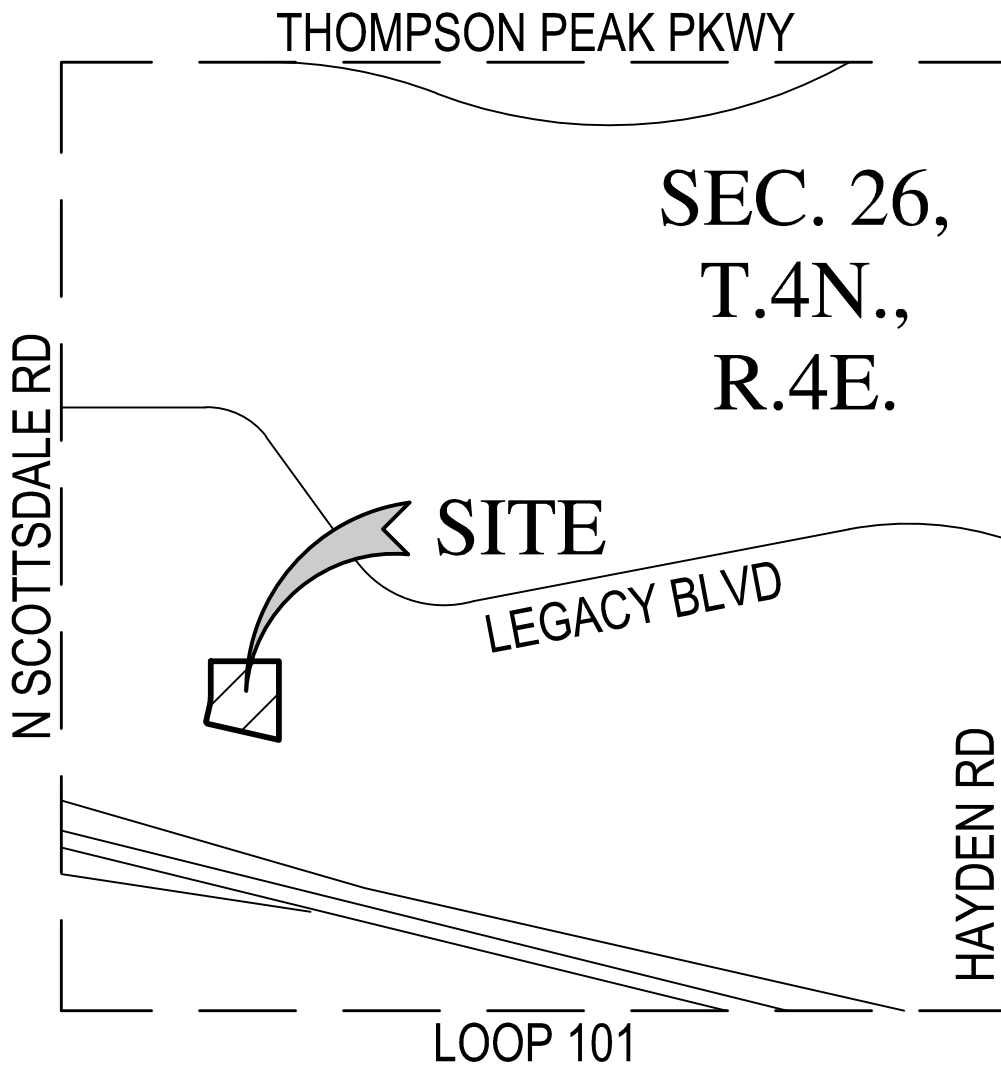

VICINITY MAP

N.T.S.

**NOT
FOR
CONSTRUCTION
OR RECORDING**




ONE SCOTTSDALE - LOT 3

VICINITY MAP

DATE	07-21-2021	SCALE	N/A	SHEET	1 OF 1
JOB NO.	225336	DESIGN	JGR	CHECK	ZNR
		DRAWN	AJS	RFI #	


Z:\2022\225336\Project Support\Reports\Water BOD\Exhibits\5336-EXH1-VM.dwg

EXHIBIT 2 – ON-SITE WATER DISTRIBUTION SYSTEM EXHIBIT (FROM MASTER REPORT)

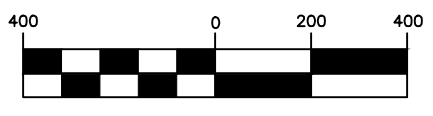

1 inch = 400 ft.

PRELIMINARY
NOT FOR
CONSTRUCTION
OR RECORDING

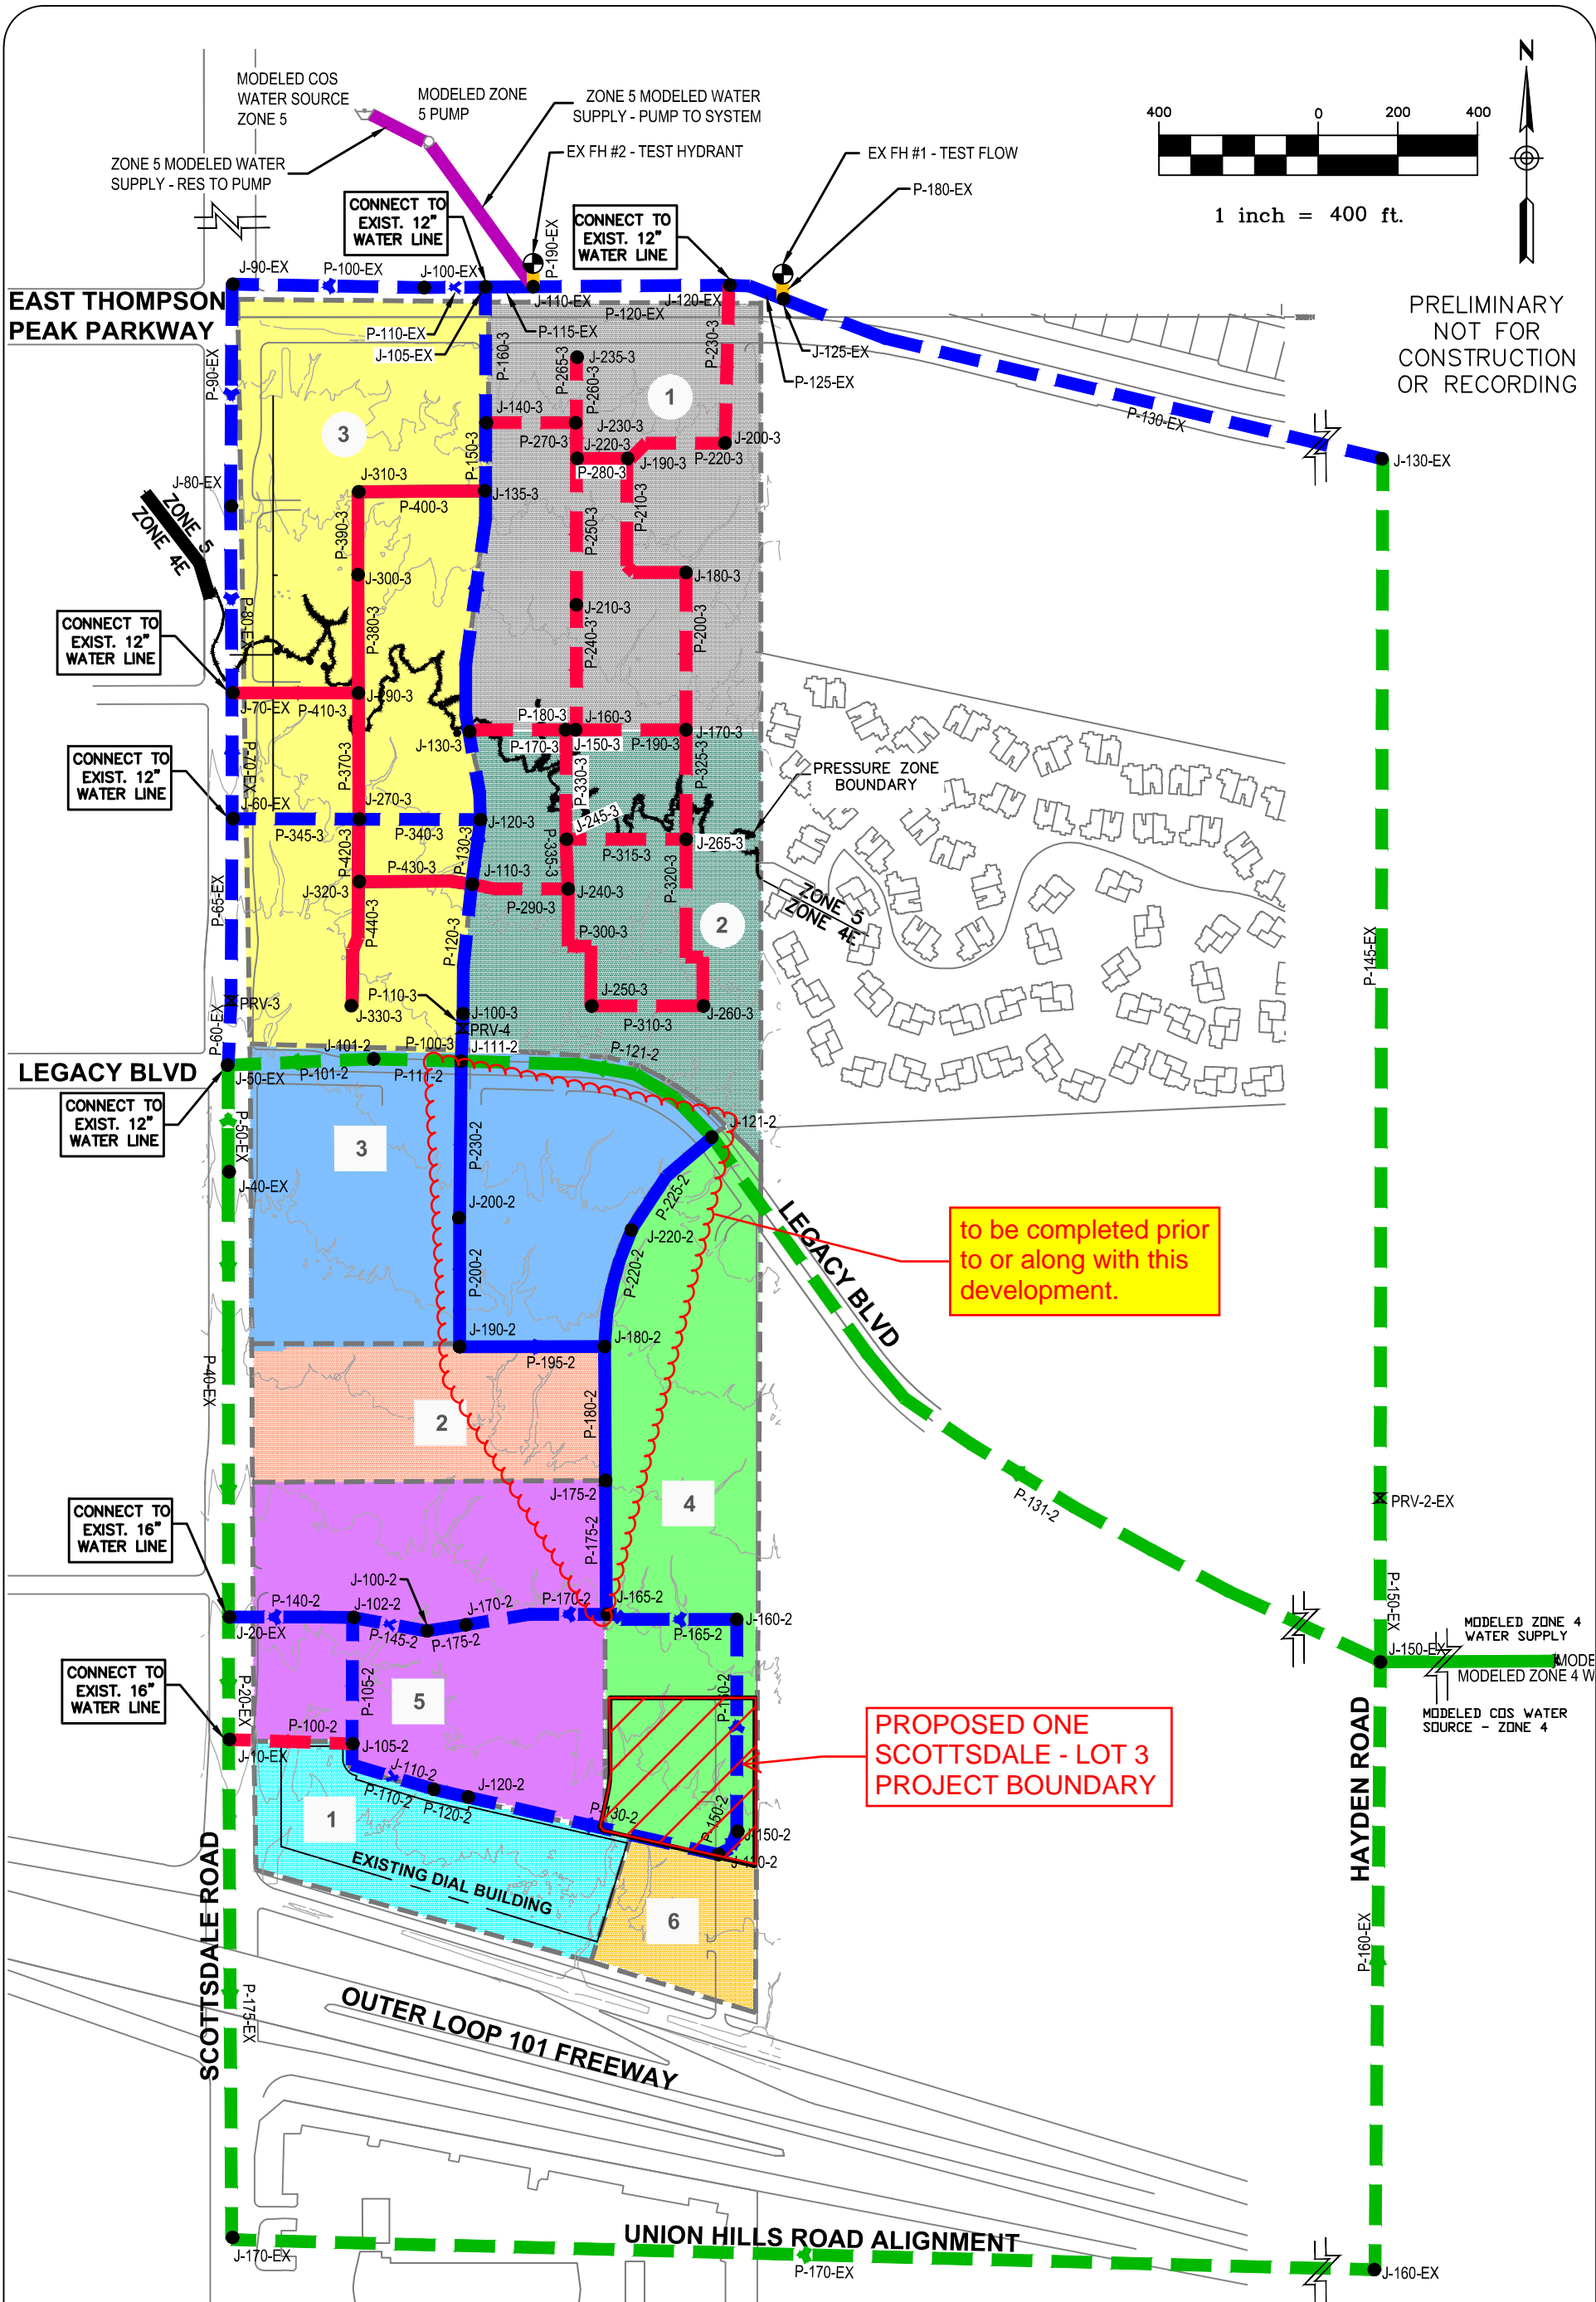

LEGEND		DIAMETER (IN)	EXISTING PIPE	PROPOSED PIPE
● JXXX-EX	JUNCTION NODE ALONG EXIST. PIPE	8		
● JXXX-2	JUNCTION NODE - PLANNING UNIT II	12		
● JXXX-3	JUNCTION NODE - PLANNING UNIT III	16		
● PXXX-EX	EXISTING PIPE			
● PXXX-2	PROPOSED PIPE - PLANNING UNIT II			
● PXXX-3	PROPOSED PIPE - PLANNING UNIT III			
⊗	PRESSURE REDUCING VALVE			
1	PHASE AREA IN PLANNING UNIT III			
2	PHASE AREA IN PLANNING UNIT II			


PLATE 3
OCTOBER 2021

**ONE SCOTTSDALE
MASTER ON-SITE
WATER PLAN EXHIBIT**

**WOOD/PATEL
ASSOCIATES**
Civil Engineers
Hydrologists
Land Surveyors
Construction Managers
(802) 995-8500

EXHIBIT 3 – MODELED ON-SITE LAND USE PLAN (FROM MASTER REPORT)

EAST THOMPSON PEAK PARKWAY

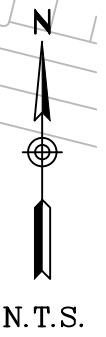

PLANNING UNIT III

LEGACY BLVD

SCOTTSDALE ROAD

PLANNING UNIT II

PROPOSED ONE SCOTTSDALE - LOT 3 PROJECT BOUNDARY

PLANNING UNIT I (NOT A PART)

3

PHASE AREA IN PLANNING UNIT III

1

PHASE AREA IN PLANNING UNIT II



PLANNING UNIT LINE


PLATE 2

JUNE 2021

ONE SCOTTSDALE
MODELED ON-SITE
LAND USE PLAN

WOOD/PATEL
ASSOCIATES
Civil Engineers
Hydrologists
Land Surveyors
Construction Managers
(802) 335-9500

EXHIBIT 4 – ONE SCOTTSDALE – LOT 3 WATER EXHIBIT

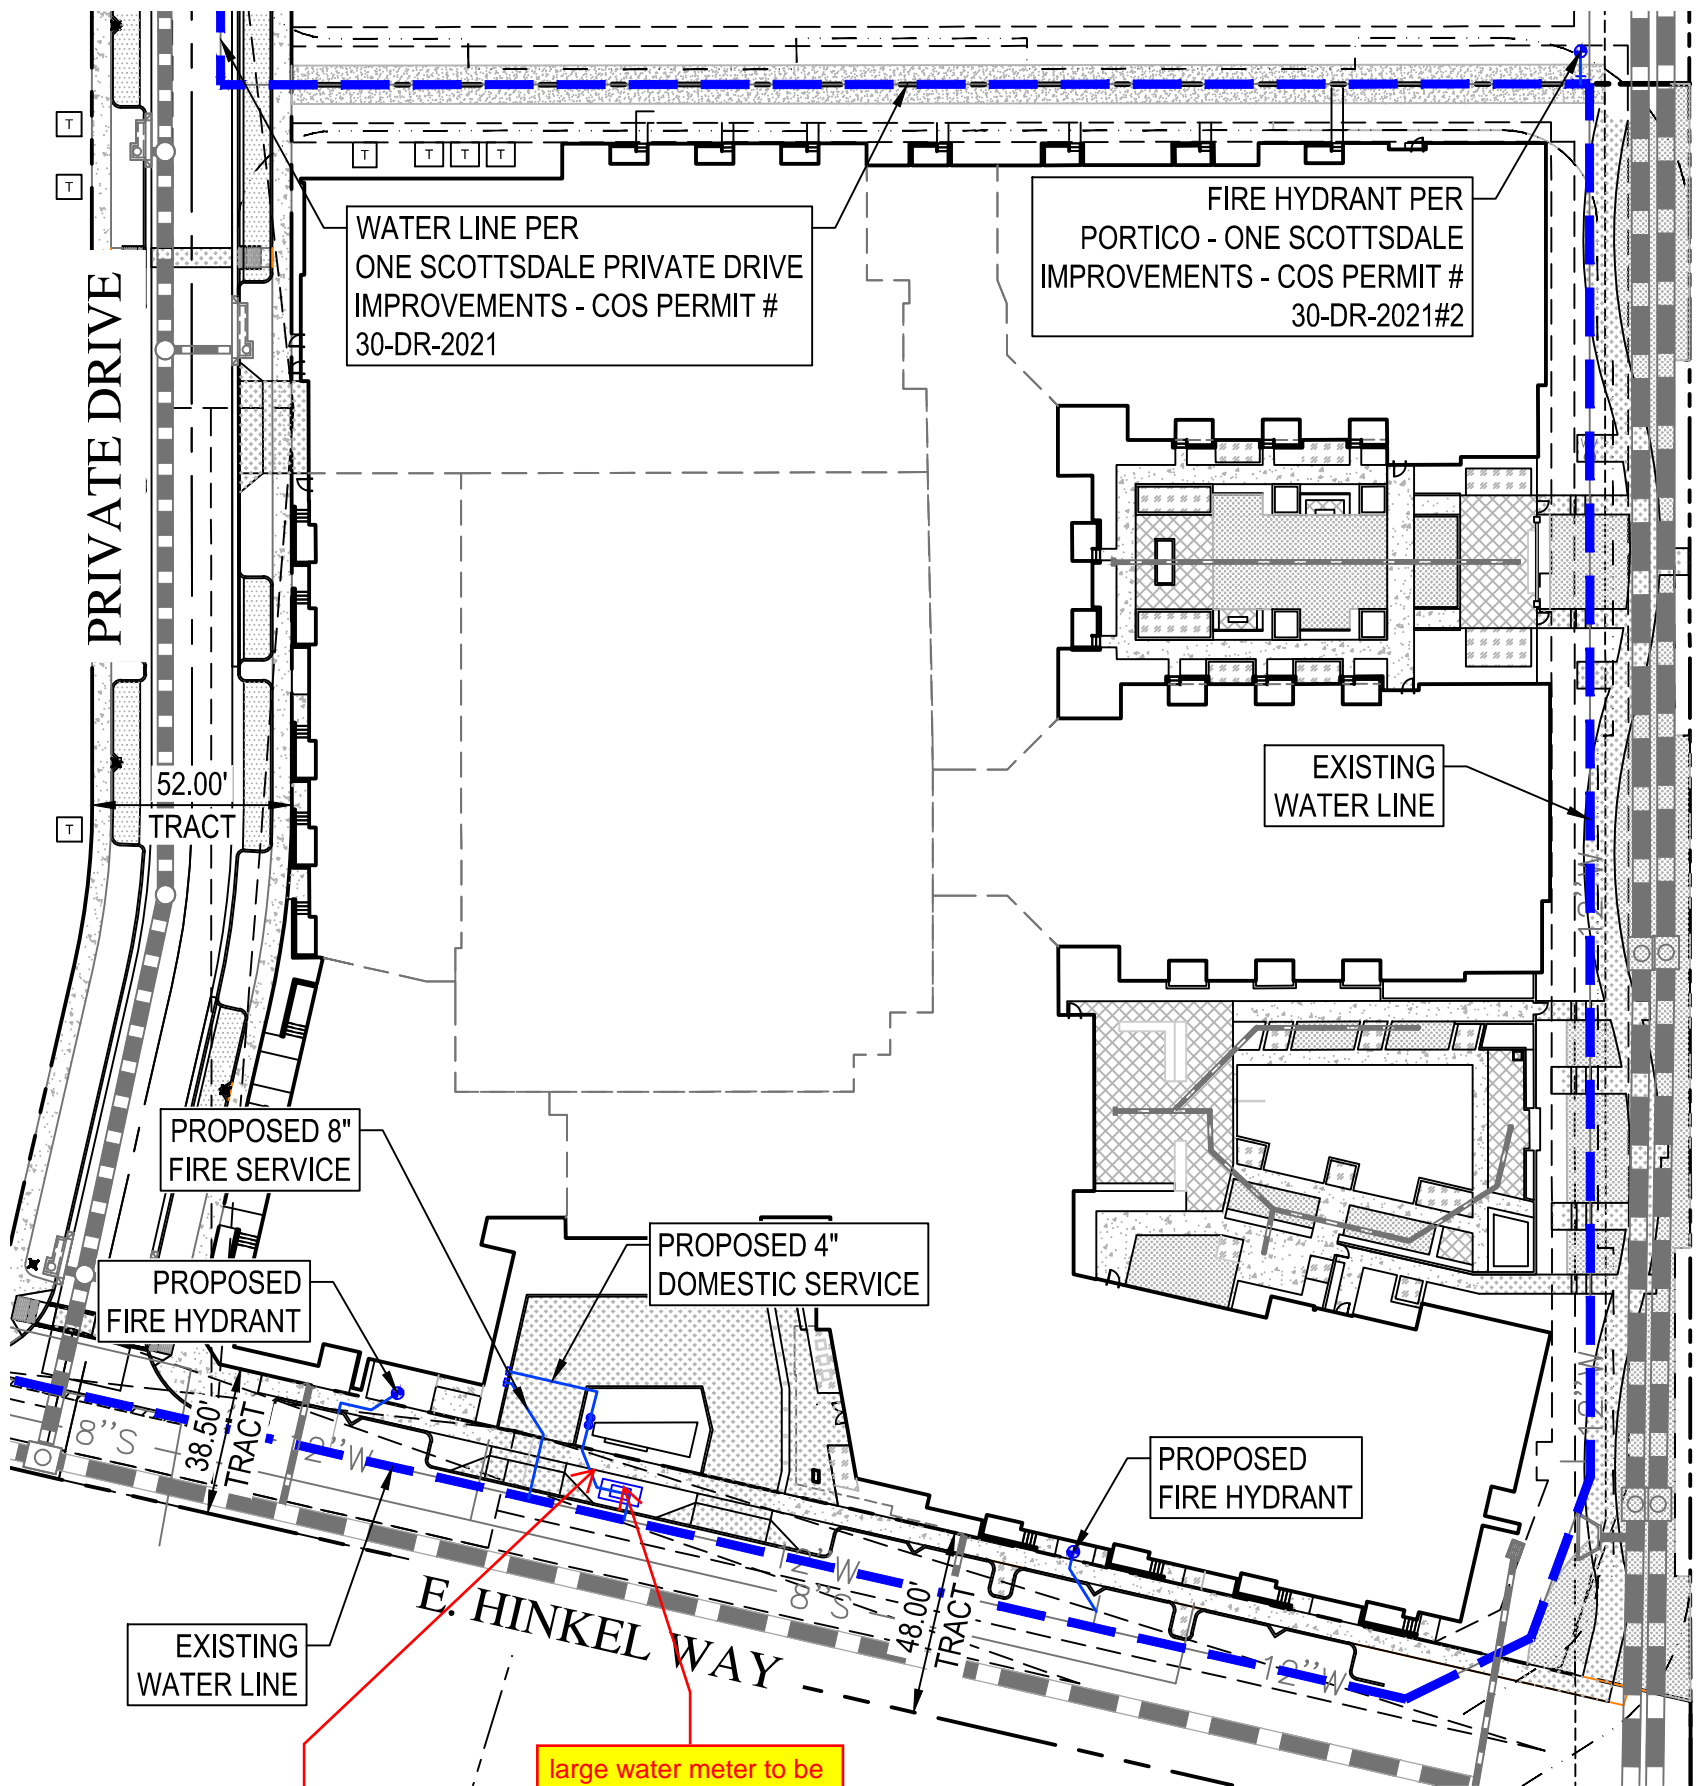


CLSM backfill service line between meter and backflow if they are not adjacent.

large water meter to be placed in vault per COS detail 2345

LEGEND

- 12" WATER LINE
- FIRE HYDRANT

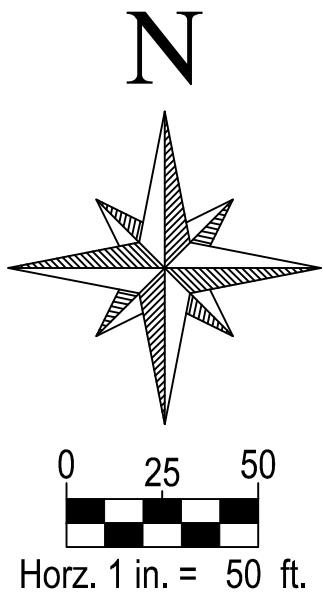

NOT FOR CONSTRUCTION OR RECORDING



ONE SCOTTSDALE - LOT 3

WATER EXHIBIT

DATE	07-21-2022	SCALE	1" = 50'	SHEET	1 OF 1
JOB NO	225336	DESIGN	JRS	CHECK	ZR
		DRAWN	AJS	RFI #	N/A