

|                                                                                                                                                                                                                                                                                                                                  |                                                     |                |                                                                                                                                |                                                                    |                                                                 |                                                                      |                                                                                                                                                                                 |            |  |  |  |  |  |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------|----------------|--------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------|-----------------------------------------------------------------|----------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|--|--|--|--|--|
|                                                                                                                                                                                                                                               | Type: <b>W10, W15</b>                               |                |                                                                                                                                |                                                                    |                                                                 |                                                                      |                                                                                                                                                                                 |            |  |  |  |  |  |
|                                                                                                                                                                                                                                                                                                                                  | <b>Slice Wall Sconce (XLCW)</b>                     |                |                                                                                                                                |                                                                    |                                                                 |                                                                      |                                                                                                                                                                                 |            |  |  |  |  |  |
| <b>ORDERING GUIDE</b>                                                                                                                                                                                                                                                                                                            |                                                     |                |                                                                                                                                |                                                                    |                                                                 |                                                                      |                                                                                                                                                                                 |            |  |  |  |  |  |
| <a href="#">Back to Quick Links</a>                                                                                                                                                                                                                                                                                              |                                                     |                |                                                                                                                                |                                                                    |                                                                 |                                                                      |                                                                                                                                                                                 |            |  |  |  |  |  |
| TYPICAL ORDER EXAMPLE: <b>XLCW FT LED HO CW UE BRZ PC120</b>                                                                                                                                                                                                                                                                     |                                                     |                |                                                                                                                                |                                                                    |                                                                 |                                                                      |                                                                                                                                                                                 |            |  |  |  |  |  |
| Prefix                                                                                                                                                                                                                                                                                                                           | Distribution                                        | LED Technology | Output                                                                                                                         | Color Temperature                                                  | Voltage                                                         | Finish                                                               | Options                                                                                                                                                                         |            |  |  |  |  |  |
| <b>XLCW</b> - Slice Wall Sconce                                                                                                                                                                                                                                                                                                  | <b>FT</b> - Type 4 Forward Throw<br>S - Symmetrical | <b>LED</b>     | <b>SS</b> - Super Saver (3,000 lms)<br><b>HO</b> - Super Saver (5,000 lms)<br><br><b>SS - Type W10</b><br><b>HO - Type W15</b> | <b>CW</b> - 5,000K CCT - 70 CRI<br><b>WW</b> - 4,000K CCT - 70 CRI | <b>UE</b> - Universal Voltage (120-277V)<br><br><b>Type W15</b> | <b>BLK</b> - Black<br><b>BRZ</b> - Dark Bronze<br><b>WHF</b> - White | (Blank) - None<br><br><b>Wireless Controls System</b><br><b>DIM</b> - 0-10v Dimming leads extended to housing exterior<br><b>PC120</b> - 120V<br><b>PC1208-277</b> - 208 - 277V |            |  |  |  |  |  |
| <b>ACCESSORY ORDERING INFORMATION</b>                                                                                                                                                                                                                                                                                            |                                                     |                |                                                                                                                                |                                                                    |                                                                 |                                                                      |                                                                                                                                                                                 |            |  |  |  |  |  |
| Description                                                                                                                                                                                                                                                                                                                      |                                                     | Order Number   |                                                                                                                                |                                                                    |                                                                 |                                                                      |                                                                                                                                                                                 |            |  |  |  |  |  |
| XLCW SW BLK - Surface Wiring Box (available in black only)                                                                                                                                                                                                                                                                       |                                                     | 356915BLK      |                                                                                                                                |                                                                    |                                                                 |                                                                      |                                                                                                                                                                                 |            |  |  |  |  |  |
| 10' Linear Bird Spike Kit (3' Recommended per Luminaire)                                                                                                                                                                                                                                                                         |                                                     | 751632         |                                                                                                                                |                                                                    |                                                                 |                                                                      |                                                                                                                                                                                 |            |  |  |  |  |  |
| <b>PERFORMANCE</b>                                                                                                                                                                                                                                                                                                               |                                                     |                |                                                                                                                                |                                                                    |                                                                 |                                                                      |                                                                                                                                                                                 |            |  |  |  |  |  |
| <a href="#">Back to Quick Links</a>                                                                                                                                                                                                                                                                                              |                                                     |                |                                                                                                                                |                                                                    |                                                                 |                                                                      |                                                                                                                                                                                 |            |  |  |  |  |  |
| <b>DELIVERED LUMENS*</b>                                                                                                                                                                                                                                                                                                         |                                                     |                |                                                                                                                                |                                                                    |                                                                 |                                                                      |                                                                                                                                                                                 |            |  |  |  |  |  |
| Lumen Package                                                                                                                                                                                                                                                                                                                    | Distribution                                        | CRI            | 4000K CCT                                                                                                                      |                                                                    |                                                                 | 5000K CCT                                                            |                                                                                                                                                                                 |            |  |  |  |  |  |
|                                                                                                                                                                                                                                                                                                                                  |                                                     |                | Delivered Lumens                                                                                                               | Efficacy                                                           | BUG Rating                                                      | Delivered Lumens                                                     | Efficacy                                                                                                                                                                        | BUG Rating |  |  |  |  |  |
| SS                                                                                                                                                                                                                                                                                                                               | FT                                                  | 65             | 3379                                                                                                                           | 85                                                                 | B1-U0-G1                                                        | 3759                                                                 | 91                                                                                                                                                                              | B1-U0-G1   |  |  |  |  |  |
|                                                                                                                                                                                                                                                                                                                                  | S                                                   |                | 3512                                                                                                                           | 85                                                                 | B2-U0-G1                                                        | 3805                                                                 | 92                                                                                                                                                                              | B2-U0-G1   |  |  |  |  |  |
|                                                                                                                                                                                                                                                                                                                                  | FT                                                  |                | 4621                                                                                                                           | 85                                                                 | B1-U0-G1                                                        | 5113                                                                 | 91                                                                                                                                                                              | B1-U0-G1   |  |  |  |  |  |
| HO                                                                                                                                                                                                                                                                                                                               | S                                                   | 65             | 4856                                                                                                                           | 87                                                                 | B2-U0-G1                                                        | 5251                                                                 | 94                                                                                                                                                                              | B2-U0-G1   |  |  |  |  |  |
|                                                                                                                                                                                                                                                                                                                                  |                                                     |                |                                                                                                                                |                                                                    |                                                                 |                                                                      |                                                                                                                                                                                 |            |  |  |  |  |  |
| *LEDs are frequently updated therefore values are nominal.                                                                                                                                                                                                                                                                       |                                                     |                |                                                                                                                                |                                                                    |                                                                 |                                                                      |                                                                                                                                                                                 |            |  |  |  |  |  |
| <b>ELECTRICAL DATA*</b>                                                                                                                                                                                                                                                                                                          |                                                     |                |                                                                                                                                |                                                                    |                                                                 |                                                                      |                                                                                                                                                                                 |            |  |  |  |  |  |
| Output                                                                                                                                                                                                                                                                                                                           | 120V                                                | 208V           | 240V                                                                                                                           | 277V                                                               |                                                                 |                                                                      |                                                                                                                                                                                 |            |  |  |  |  |  |
| SS                                                                                                                                                                                                                                                                                                                               | 0.34                                                | 0.20           | 0.17                                                                                                                           | 0.15                                                               |                                                                 |                                                                      |                                                                                                                                                                                 |            |  |  |  |  |  |
| HO                                                                                                                                                                                                                                                                                                                               | 0.47                                                | 0.27           | 0.23                                                                                                                           | 0.20                                                               |                                                                 |                                                                      |                                                                                                                                                                                 |            |  |  |  |  |  |
| *Electrical data at 25C (77F). Actual wattage may differ by +/-10%.                                                                                                                                                                                                                                                              |                                                     |                |                                                                                                                                |                                                                    |                                                                 |                                                                      |                                                                                                                                                                                 |            |  |  |  |  |  |
| <div>            LSI Industries Inc. 10000 Alliance Rd. Cincinnati, OH 45242 • www.lsicorp.com<br/>           (513) 372-3200 • ©2020 LSI Industries Inc. All Rights Reserved. Specifications subject to change without notice.         </div> |                                                     |                |                                                                                                                                |                                                                    |                                                                 |                                                                      |                                                                                                                                                                                 |            |  |  |  |  |  |
|                                                                                                                                                                                                                                                                                                                                  |                                                     |                |                                                                                                                                |                                                                    |                                                                 | Page 2/3 Rev. 03/09/22<br>SPEC.1024.A.0420                           |                                                                                                                                                                                 |            |  |  |  |  |  |

| <b>WHAT'S IN THE BOX</b><br>LED recessed fixture<br>Junction box<br>3x Push-in wire connectors<br>Mounting hardware<br>Instruction sheet                                                                                                                               |                        | <b>ACCESSORIES</b><br><a href="#">RFP-23</a><br>Drilling plate<br><br><a href="#">RFP-UNI</a><br>Universal drilling plate |            | <b>ADAPTORS</b><br><a href="#">REC-CC-EXT8FT</a><br>96" extension cord for recessed fixtures<br><br><a href="#">REC-CC-EXT20FT</a><br>240" extension cord for recessed fixtures |     |          |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|---------------------------------------------------------------------------------------------------------------------------|------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|----------|
| <b>RECOMMENDED DIMMER LIST*</b>                                                                                                                                                                                                                                        |                        |                                                                                                                           |            |                                                                                                                                                                                 |     |          |
| BRAND                                                                                                                                                                                                                                                                  | MODEL                  | DIMMER SPECS                                                                                                              | GRADE      | MIN                                                                                                                                                                             | MAX | MAX LOAD |
| Dals                                                                                                                                                                                                                                                                   | SM-DIMSW Smart Dimmer* | Triac, 250W LED/CFL                                                                                                       | Compatible | 7                                                                                                                                                                               | 100 | 17       |
| Lutron                                                                                                                                                                                                                                                                 | DVCL-153PR-WH-C*       | Triac, 150 W Dimmable CFL/LED                                                                                             | Compatible | 8                                                                                                                                                                               | 100 | 10       |
| Lutron                                                                                                                                                                                                                                                                 | CTCL-153PDH-WH-C*      | Triac, 150 W Dimmable CFL/LED                                                                                             | Compatible | 7                                                                                                                                                                               | 100 | 10       |
| Lutron                                                                                                                                                                                                                                                                 | STCL-153PH-WH-C*       | Triac, 150 W Dimmable CFL/LED                                                                                             | Compatible | 0                                                                                                                                                                               | 99  | 10       |
| Lutron                                                                                                                                                                                                                                                                 | MACL-153MRHW-WHC*      | Triac, 150 W Dimmable CFL/LED                                                                                             | Compatible | 0                                                                                                                                                                               | 98  | 10       |
| Lutron                                                                                                                                                                                                                                                                 | DVELV-300P-WH          | 300W electronic low voltage dimmer                                                                                        | Compatible | 9                                                                                                                                                                               | 100 | 20       |
| Lutron                                                                                                                                                                                                                                                                 | MA-PRO-WH*             | ELV, 250W LED/CFL                                                                                                         | Compatible | 0                                                                                                                                                                               | 99  | 17       |
| Lutron                                                                                                                                                                                                                                                                 | Caseta PD-6WCL-WH-R-C* | Triac, 300W Dimmable CFL/LED                                                                                              | Compatible | 8                                                                                                                                                                               | 99  | 20       |
| Lutron                                                                                                                                                                                                                                                                 | Caseta PD-SNE-WH-C*    | ELV, LED—up to 250 W                                                                                                      | Compatible | 6                                                                                                                                                                               | 99  | 17       |
| Lutron                                                                                                                                                                                                                                                                 | Caseta PD-10NXD-WH*    | Triac, LED—up to 250 W                                                                                                    | Compatible | 0                                                                                                                                                                               | 100 | 17       |
| Leviton                                                                                                                                                                                                                                                                | DSM10-1LZ*             | Triac, 450W Dimmable CFL/LED                                                                                              | Compatible | 8                                                                                                                                                                               | 100 | 30       |
| Leviton                                                                                                                                                                                                                                                                | 6674*                  | Triac, 150 W Dimmable CFL/LED                                                                                             | Compatible | 12                                                                                                                                                                              | 100 | 10       |
| Leviton                                                                                                                                                                                                                                                                | JPL06-10Z*             | Triac, 150 W Dimmable CFL/LED                                                                                             | Compatible | 10                                                                                                                                                                              | 100 | 10       |
| Leviton                                                                                                                                                                                                                                                                | DSL06-1LZ*             | Triac, 150 W Dimmable CFL/LED                                                                                             | Compatible | 9                                                                                                                                                                               | 100 | 10       |
| Leviton                                                                                                                                                                                                                                                                | D26HD-742-1RW*         | Triac, 300W LED/CFL                                                                                                       | Compatible | 11                                                                                                                                                                              | 100 | 20       |
| Legrand                                                                                                                                                                                                                                                                | RHCL453PNICVCU*        | Triac, 450W Dimmable CFL/LED                                                                                              | Compatible | 11                                                                                                                                                                              | 100 | 30       |
| Legrand                                                                                                                                                                                                                                                                | ADTP703TUM4*           | Triac, 450W Dimmable CFL/LED                                                                                              | Compatible | 13                                                                                                                                                                              | 100 | 30       |
| Control 4                                                                                                                                                                                                                                                              | C4-APD120-WH           | ELV, 120W LED                                                                                                             | Compatible | 0                                                                                                                                                                               | 100 | 8        |
| Control 4                                                                                                                                                                                                                                                              | C4-FPD120-WH           | Triac, 200W LED                                                                                                           | Compatible | 0                                                                                                                                                                               | 100 | 13       |
| Commercial Electric                                                                                                                                                                                                                                                    | HPDA311CW8*            | Triac, 150W LED & CFL                                                                                                     | Compatible | 0                                                                                                                                                                               | 100 | 10       |
| tp-link                                                                                                                                                                                                                                                                | HS220*                 | Triac, 150 W Dimmable LED (MLV)                                                                                           | Compatible | 3                                                                                                                                                                               | 100 | 10       |
| *With Low-End Adjustment Feature<br>Minimal buzzing noise may occur with some dimmers                                                                                                                                                                                  |                        |                                                                                                                           |            |                                                                                                                                                                                 |     |          |
| <b>WARRANTY</b><br>DALS offers a 5-year warranty from the date of purchase which covers repairs or replacement of defective parts of the housing, optics, and electronics.<br>To contact DALS customer service call 1-877-430-1818 or send an e-mail to info@dals.com. |                        |                                                                                                                           |            |                                                                                                                                                                                 |     |          |
| <b>RGR2HP-CC</b>                                                                                                                                                                                                                                                       |                        |                                      |            |                                                                                                                                                                                 |     |          |

[illegible]



**DALS LIGHTING**

Canada  
80, de la Seigneurie Blvd., E.  
Blainville, Quebec J7C 4N1

U.S.A.  
4383, NW 124th Ave.,  
Coral Springs, Florida 33065

877.430.1818  
info@dals.com  
dals.com

MODEL


SWS24-CC

NAME

Gemini

24" Slim wall mount

The Gemini is new to our exterior collection. It is its simplicity which makes this luminaire so special – an unobtrusive, yet striking design that blends in perfectly with big architectural features.

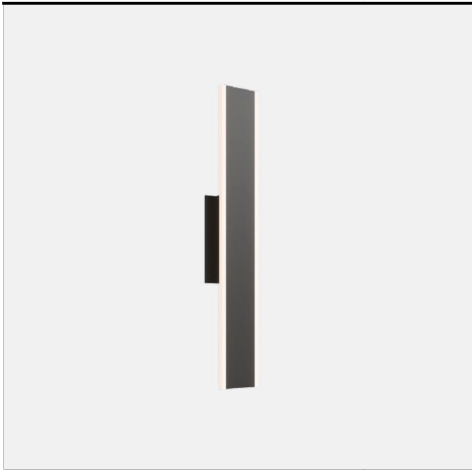

PROJECT


TYPE

S2


DATE

QTY

NOTES

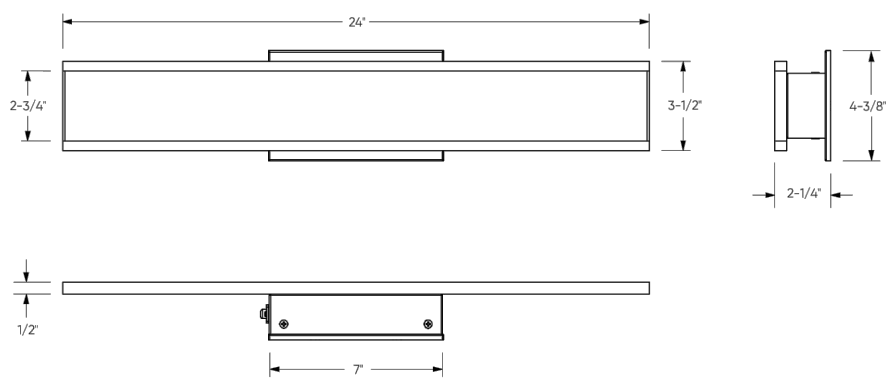

LIGHT DISTRIBUTION

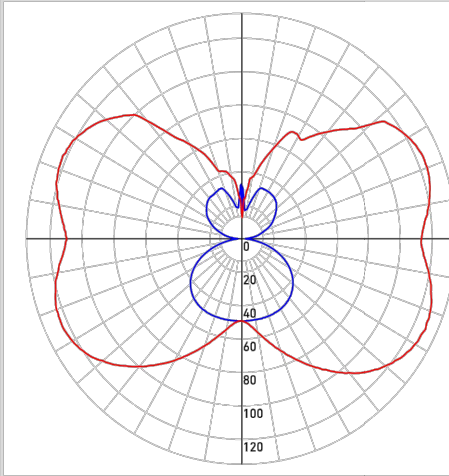

\*Lumen output measured at 3000K

QUICK SPECS

|                   |                               |
|-------------------|-------------------------------|
| Size              | 24"                           |
| Watts (W)         | 20                            |
| Delivered lumens* | 900                           |
| CRI               | 90                            |
| Voltage (v)       | 120                           |
| Beam angle (deg)  | 360                           |
| Mounting          | Screwed in                    |
| Lifespan (hrs)    | 50000                         |
| Binning           | 3 SDCM                        |
| LED model         | SMD 2835                      |
| Light direction   | Each side                     |
| Color temperature | 2700K/3000K/3500K/4000K/5000K |

ELECTRICAL DETAILS

|                       |                  |
|-----------------------|------------------|
| Environment           | Wet              |
| Location              | Outdoor          |
| Operating temp. (° C) | -20 to 45        |
| IP rating             | IP54             |
| Input voltage (V)     | 120              |
| Output voltage (V)    | 30-36            |
| Output current (mA)   | 500              |
| Power factor          | 99               |
| Driver type           | Constant current |
| THD                   | ± 30%            |
| Certifications        | ETL, FCC, ICES   |

ORDERING GUIDE

SWS24-CC

-

Finish

BK - Black

CONSTRUCTION

|                  |                |
|------------------|----------------|
| Lens material    | Acrylic        |
| Lens type        | Frosted lens   |
| Finish type      | Powder coating |
| Housing material | Aluminum       |



**DALS LIGHTING**

Canada  
80, de la Seigneurie Blvd., E.  
Blainville, Quebec J7C 4N1

U.S.A.  
4383, NW 124th Ave.,  
Coral Springs, Florida 33065

877.430.1818  
info@dals.com  
dals.com

MODEL


SWS48-CC

NAME

Gemini

48" Slim wall mount

The Gemini is new to our exterior collection. It is its simplicity which makes this luminaire so special – an unobtrusive, yet striking design that blends in perfectly with big architectural features.

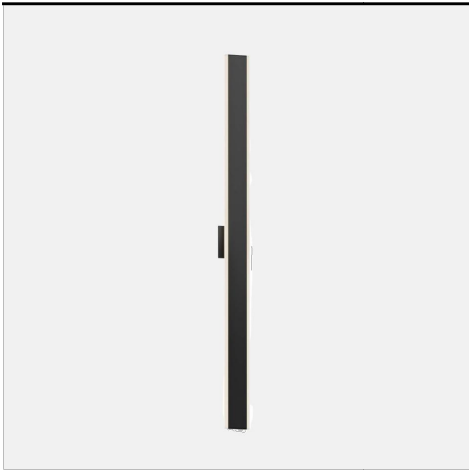

PROJECT


TYPE

S1


DATE

QTY

NOTES

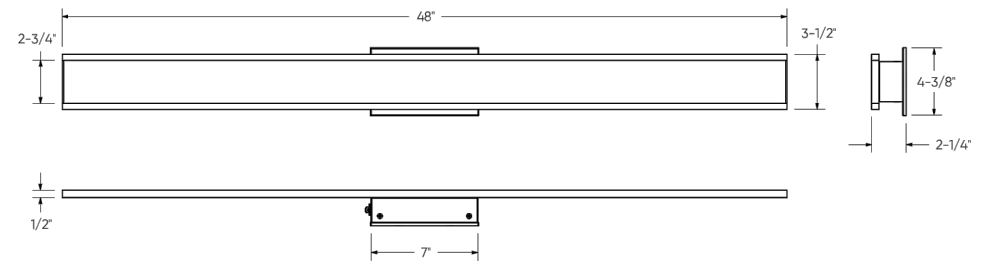

LIGHT DISTRIBUTION

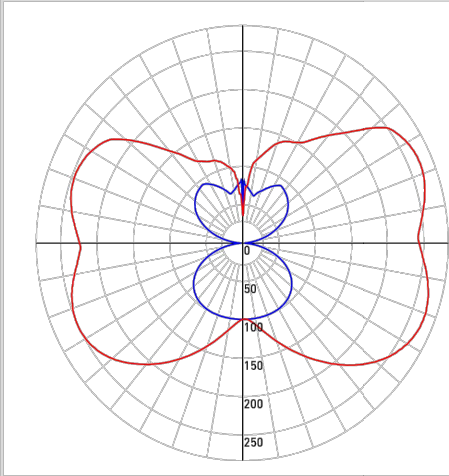

\*Lumen output measured at 3000K

QUICK SPECS

|                   |                               |
|-------------------|-------------------------------|
| Size              | 48"                           |
| Watts (W)         | 40                            |
| Delivered lumens* | 1900                          |
| CRI               | 90                            |
| Voltage (v)       | 120                           |
| Beam angle (deg)  | 180                           |
| Mounting          | Screwed in                    |
| Lifespan (hrs)    | 50 000                        |
| Binning           | 3 SDCM                        |
| LED model         | SMD 2835                      |
| Light direction   | Each side                     |
| Color temperature | 2700K/3000K/3500K/4000K/5000K |

ELECTRICAL DETAILS

|                       |                  |
|-----------------------|------------------|
| Environment           | Wet              |
| Location              | Indoor/Outdoor   |
| Operating temp. (° C) | -20 to 50        |
| IP rating             | IP54             |
| Input voltage (V)     | 120              |
| Output voltage (V)    | 31-42            |
| Output current (mA)   | 1050             |
| Power factor          | 90               |
| Driver type           | Constant current |
| THD                   | ± 30%            |
| Certifications        | ETL, FCC, ICES   |

ORDERING GUIDE

SWS48-CC

-

Finish

BK - Black

CONSTRUCTION

|                  |                |
|------------------|----------------|
| Lens material    | Plastic        |
| Lens type        | Frosted        |
| Finish type      | Powder coating |
| Housing material | Aluminum       |

WHAT'S IN THE BOX

LED wall mount  
Mounting bracket  
Mounting hardware  
Wire nuts  
Instruction sheet

ACCESSORIES

ADAPTORS

RECOMMENDED DIMMER LIST\*

| BRAND               | MODEL                  | DIMMER SPECS                       | GRADE      | MIN | MAX | MAX LOAD |
|---------------------|------------------------|------------------------------------|------------|-----|-----|----------|
| Dals                | SM-DIMSW Smart Dimmer* | Triac, 250W LED/CFL                | Compatible | 3   | 100 | 13       |
| Lutron              | DVCL-153PR-WH-C*       | Triac, 150 W Dimmable CFL/LED      | Compatible | 3   | 99  | 8        |
| Lutron              | STCL-153PH-WH-C*       | Triac, 150 W Dimmable CFL/LED      | Compatible | 0   | 99  | 8        |
| Lutron              | MACL-153MRHW-WHC*      | Triac, 150 W Dimmable CFL/LED      | Compatible | 0   | 99  | 8        |
| Lutron              | DVELV-300P-WH          | 300W electronic low voltage dimmer | Compatible | 5   | 97  | 15       |
| Lutron              | MA-PRO-WH*             | ELV, 250W LED/CFL                  | Compatible | 0   | 99  | 13       |
| Lutron              | Caseta PD-6WCL-WH-R-C* | Triac, 300W Dimmable CFL/LED       | Compatible | 0   | 98  | 8        |
| Lutron              | Caseta PD-5NE-WH-C*    | ELV, LED—up to 250 W               | Compatible | 2   | 99  | 13       |
| Lutron              | Caseta PD-10NXD-WH*    | Triac, LED—up to 250 W             | Compatible | 0   | 98  | 13       |
| Leviton             | DSM10-1LZ*             | Triac, 450W Dimmable CFL/LED       | Compatible | 1   | 99  | 23       |
| Leviton             | 6674*                  | Triac, 150 W Dimmable CFL/LED      | Compatible | 6   | 99  | 8        |
| Leviton             | IFL06-10Z*             | Triac, 150 W Dimmable CFL/LED      | Compatible | 5   | 98  | 8        |
| Leviton             | DSL06-1LZ*             | Triac, 150 W Dimmable CFL/LED      | Compatible | 5   | 98  | 8        |
| Leviton             | D26HD-742-1RW*         | Triac, 300W LED/CFL                | Compatible | 7   | 99  | 15       |
| Legrand             | RHCL453PNICCV4*        | Triac, 450W Dimmable CFL/LED       | Compatible | 10  | 99  | 23       |
| Legrand             | ADTP703TUM4*           | Triac,450W Dimmable CFL/LED        | Compatible | 9   | 99  | 23       |
| Control 4           | C4-APD120-WH           | ELV, 120W LED                      | Compatible | 0   | 99  | 6        |
| Control 4           | C4-FPD120-WH           | Triac, 200W LED                    | Compatible | 0   | 99  | 10       |
| Commercial Electric | HPDA311CWB*            | Triac, 150W LED & CFL              | Compatible | 0   | 99  | 8        |
| TP-Link             | HS220*                 | Triac, 150 W, Dimmable LED (MLV)   | Compatible | 1   | 99  | 8        |

\*With Low-End Adjustment Feature

Minimal buzzing noise may occur with some dimmers

WARRANTY

DALS offers a 5-year warranty from the date of purchase which covers repairs or replacement of defective parts of the housing, optics, and electronics. To contact DALS customer service call 1-877-430-1818 or send an e-mail to info@dals.com.

SWS24-CC



WHAT'S IN THE BOX

LED wall mount  
Mounting bracket  
Mounting hardware  
Wire nuts  
Instruction sheet

ACCESSORIES

ADAPTORS

RECOMMENDED DIMMER LIST\*

| BRAND     | MODEL                 | DIMMER SPECS                       | GRADE      | MIN | MAX | MAX LOAD |
|-----------|-----------------------|------------------------------------|------------|-----|-----|----------|
| Dals      | SM-DIMSW Smart Dimmer | Triac, 250W LED/CFL                | Compatible | 5   | 100 | 6        |
| Lutron    | DVCL-153PR-WH-C       | Triac, 150 W Dimmable CFL/LED      | Compatible | 4   | 100 | 4        |
| Lutron    | CTCL-153PDH-WH-C      | Triac, 150 W Dimmable CFL/LED      | Compatible | 3   | 100 | 4        |
| Lutron    | STCL-153PH-WH-C       | Triac, 150 W Dimmable CFL/LED      | Compatible | 1   | 99  | 4        |
| Lutron    | DVWCL-153PH-WHC       | Triac, 150 W Dimmable CFL/LED      | Compatible | 4   | 99  | 4        |
| Lutron    | MACL-153MRHW-WHC      | Triac, 150 W Dimmable CFL/LED      | Compatible | 0   | 99  | 4        |
| Lutron    | DVELV-300P-WH         | 300W electronic low voltage dimmer | Compatible | 5   | 97  | 7        |
| Lutron    | MA-PRO-WH             | ELV, 250W LED/CFL                  | Compatible | 1   | 99  | 6        |
| Lutron    | Caseta PD-6WCL-WH-R-C | Triac, 300W Dimmable CFL/LED       | Compatible | 1   | 99  | 4        |
| Lutron    | Caseta PD-5NE-WH-C    | ELV, LED—up to 250 W               | Compatible | 2   | 100 | 6        |
| Lutron    | Caseta PD-10NXD-WH    | Triac, LED—up to 250 W             | Compatible | 1   | 99  | 6        |
| Leviton   | 6672-1LW              | Triac, 150W Dimmable CFL/LED       | Compatible | 19  | 100 | 4        |
| Leviton   | DSM10-1LZ             | Triac, 450W Dimmable CFL/LED       | Compatible | 3   | 100 | 11       |
| Leviton   | 6674                  | Triac, 150 W Dimmable CFL/LED      | Compatible | 5   | 100 | 4        |
| Leviton   | IFL06-10Z             | Triac, 150 W Dimmable CFL/LED      | Compatible | 7   | 99  | 7        |
| Leviton   | DSL06-1LZ             | Triac, 150 W Dimmable CFL/LED      | Compatible | 17  | 98  | 11       |
| Legrand   | D26HD-742-1RW         | Triac, 300W LED/CFL                | Compatible | 2   | 97  | 11       |
| Legrand   | RHCL453PNICCV4        | Triac, 450W Dimmable CFL/LED       | Compatible | 13  | 99  | 11       |
| Legrand   | ADTP703TUM4           | Triac,450W Dimmable CFL/LED        | Compatible | 12  | 99  | 6        |
| Control 4 | ADPD453LM2            | Triac,450W Dimmable CFL/LED        | Compatible | 0   | 100 | 3        |
| Control 4 | RHL373PW              | Triac, 250W LED                    | Compatible | 0   | 100 | 5        |
| tp-link   | C4-APD120-WH          | ELV, 120W LED                      | Compatible | 3   | 99  | 4        |
| Leviton   | C4-FPD120-WH          | Triac, 200W LED                    | Compatible | 24  | 99  | 4        |

Minimal buzzing noise may occur with some dimmers

WARRANTY

DALS offers a 5-year warranty from the date of purchase which covers repairs or replacement of defective parts of the housing, optics, and electronics. To contact DALS customer service call 1-877-430-1818 or send an e-mail to info@dals.com.

SWS48-CC



Rev. Date: Description:

SCOTTSDALE UMC MULTI-FAMILY

DRB SUBMISSION #840-PA-2024

SCOTTSDALE, AZ 24065

ELECTRICAL SITE LIGHTING CUT-SHEETS

**NP ENGINEERING INC.**  
4115 N. 15TH AVE.  
PHOENIX, AZ 85015  
PH: (602) 265-1559 FAX: (602) 265-1605

This drawing is an instrument of service. It is the property of NP ENGINEERING, INC. The contents or any accompanying specifications shall not be altered or reproduced without the written permission of NP ENGINEERING, INC.  
Copyright © 2026, by NP ENGINEERING, INC.

NP Proj. No: 24-065  
Project Manager: RP  
Drawn by: NPE  
Date: 06-27-25

E4.0

Sheet

of