




01 REFUSE PLAN
SCALE: 1"=30'

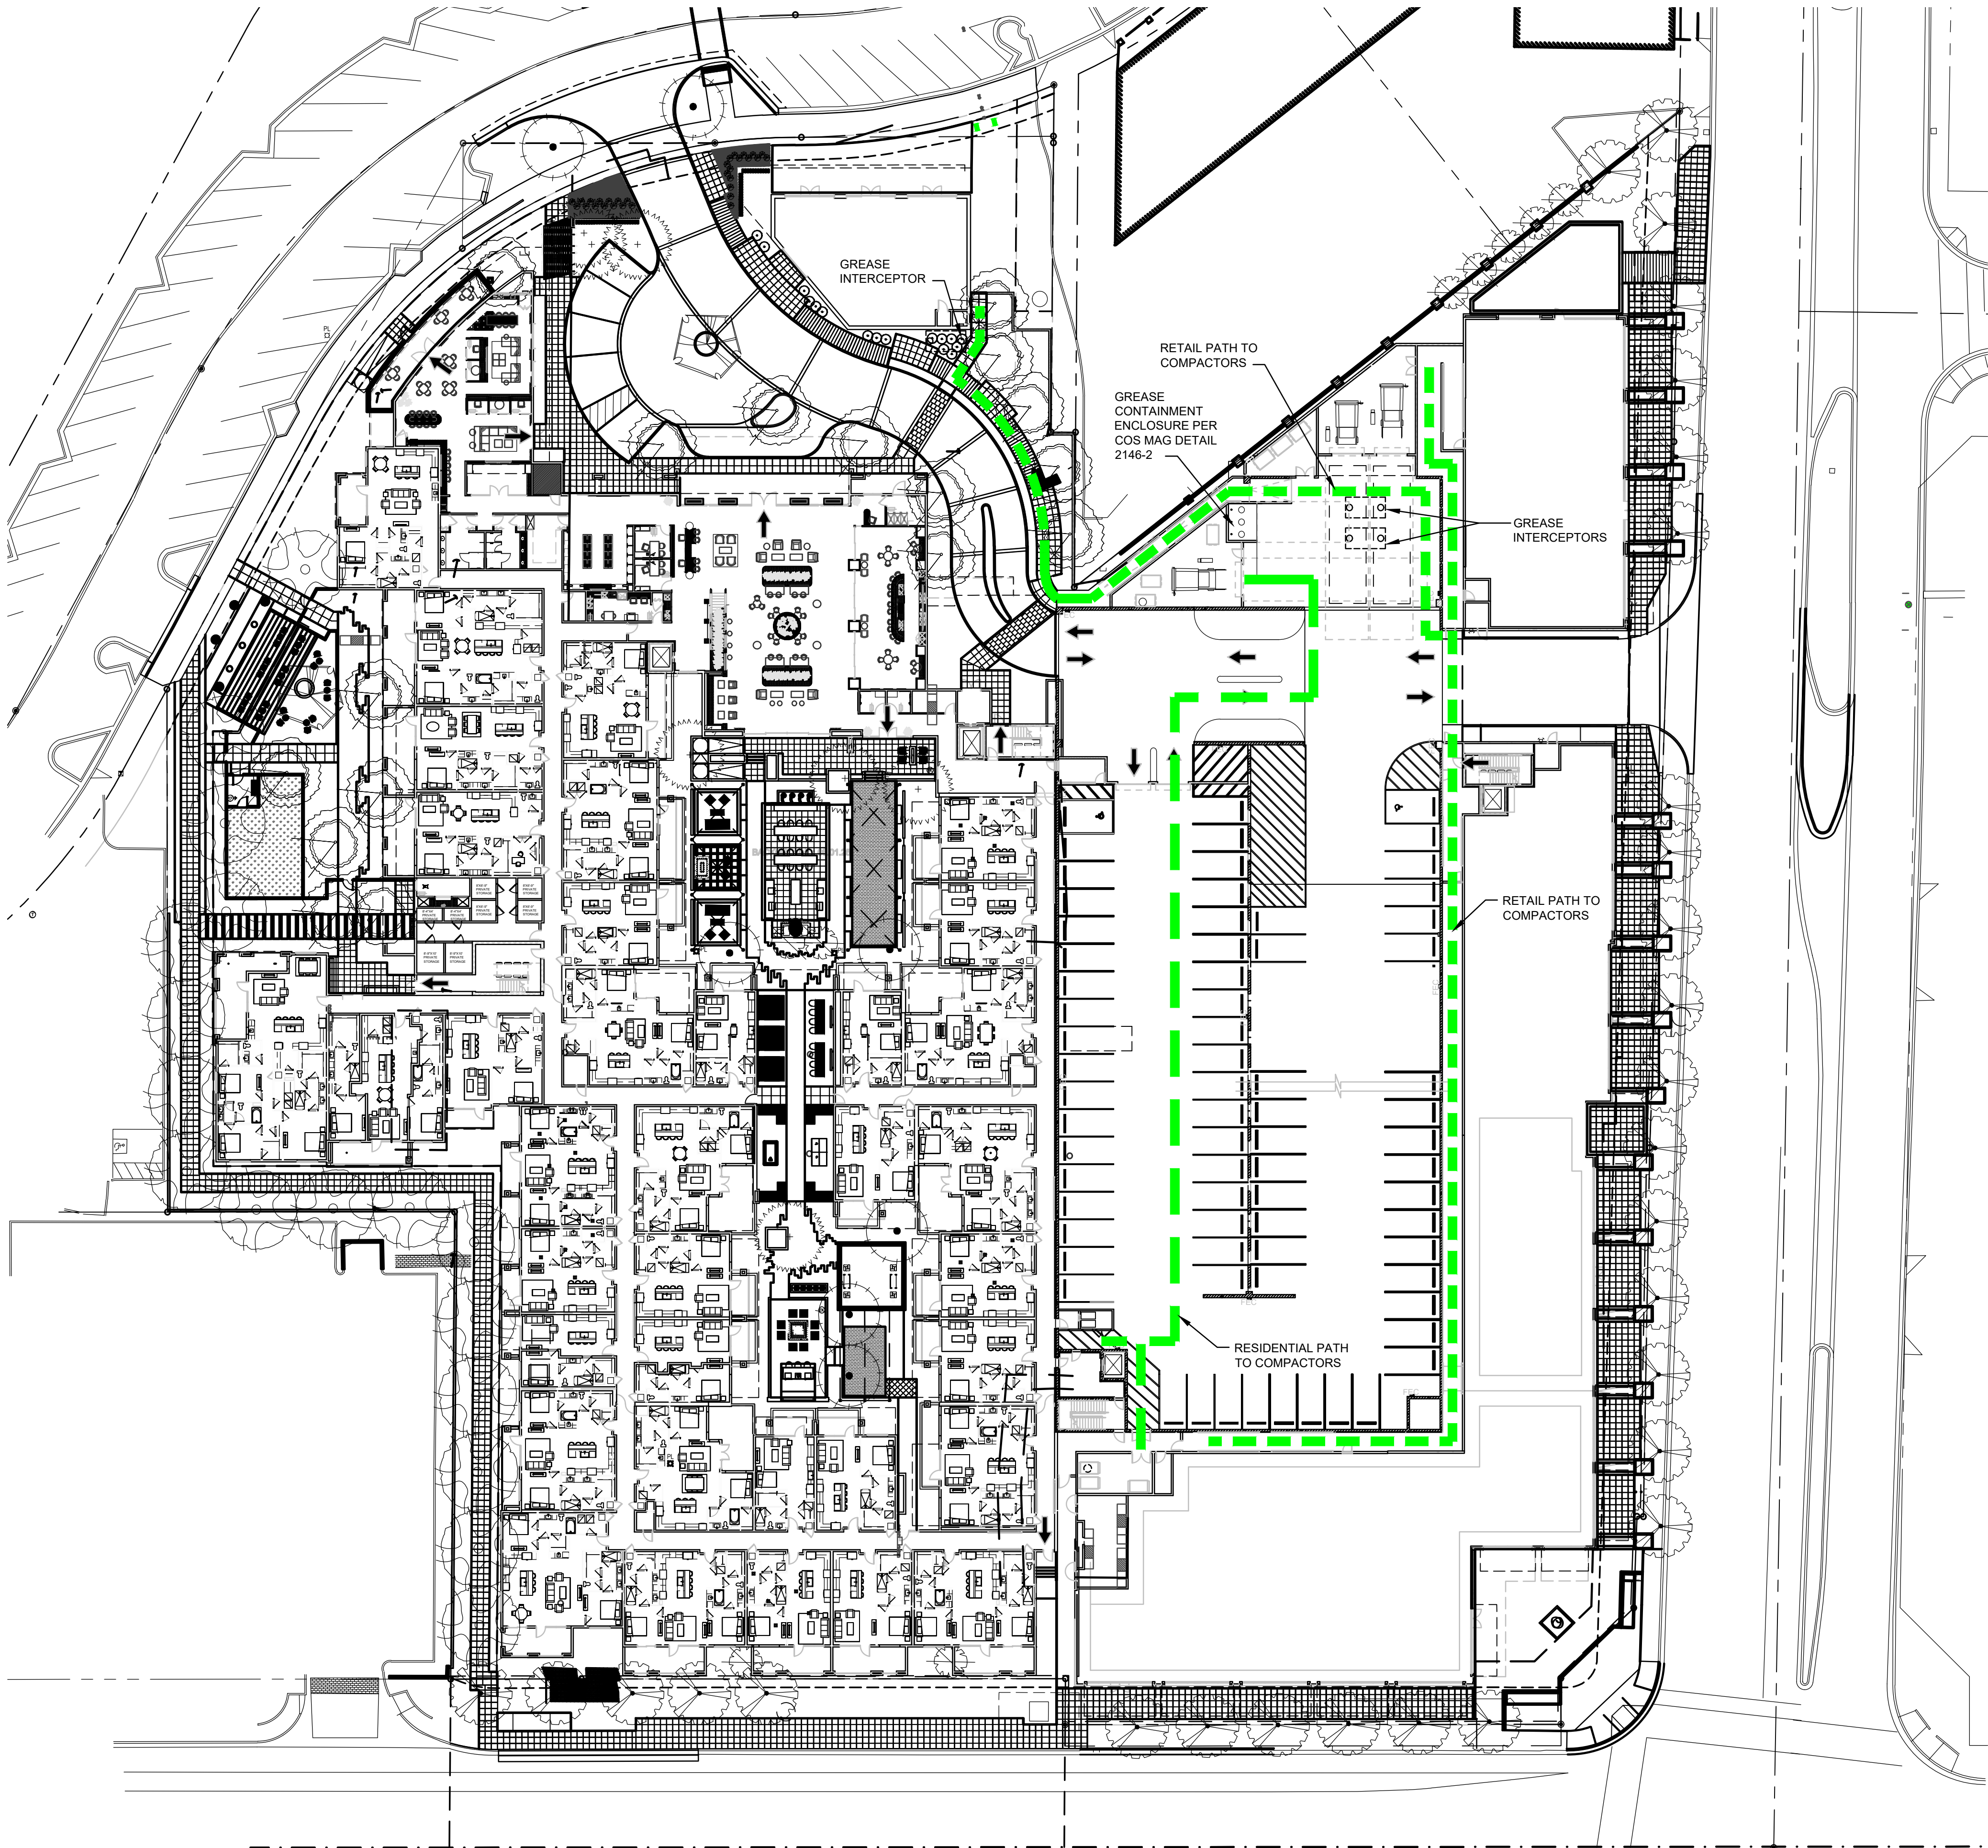

REFUSE / RECYCLING REQUIREMENTS

APARTMENTS & CONDOMINIUMS W/ RECYCLING

REQUIRED: 2 ENCLOSURES FOR EVERY 30 UNITS
232 UNITS = 15.47 ENCLOSURES FOR REFUSE AND RECYCLING

REFUSE REQUIRED: 7.73 ENCLOSURES X 4 CU YD = 30.92 CU YD
COMPACTED TRASH AT 1:4 = 7.73 CU YD

REFUSE PROVIDED: COMPACTED TRASH = 15 CU YD

RECYCLING REQUIRED: 7.73 ENCLOSURES X 4 CU YD = 30.92 CU YD
COMPACTED RECYCLING AT 1:4 = 7.73 CU YD

RECYCLING PROVIDED: SHARED COMPACTED RECYCLING = 15 CU YD

NON-RESIDENTIAL DEVELOPMENT W/ RECYCLING

REQUIRED: 2 ENCLOSURES FOR EVERY 30,000 SF
29,000 SF = 2 ENCLOSURES FOR REFUSE AND RECYCLING

RESTAURANTS / BARS W/ RECYCLING

REQUIRED: 1 ENCLOSURE W/ GREASE CONTAINMENT AND 1 ENCLOSURE W/OUT CONTAINMENT PER RESTAURAN
3 RESTAURANTS = 3 ENCLOSURES W/ GREASE CONTAINMENT AND 3 ENCLOSURES WITHOUT CONTAINMENT

TOTAL NON-RESIDENTIAL REQUIRED: 8 ENCLOSURES FOR REFUSE AND RECYCLING

REFUSE REQUIRED: 4 ENCLOSURES X 4 CU YD = 16 CU YD
COMPACTED TRASH AT 1:4 = 4 CU YD

REFUSE PROVIDED: COMPACTED TRASH = 15 CU YD

RECYCLING REQUIRED: 4 ENCLOSURES X 4 CU YD = 16 CU YD
COMPACTED RECYCLING AT 1:4 = 4 CU YD

RECYCLING PROVIDED: SHARED COMPACTED RECYCLING = 15 CU YD

Nelsen Partners, Inc.
Austin | Scottsdale
15210 North Scottsdale Road
Suite #300
Scottsdale, Arizona 85254
t 480.949.6800
nelsonpartners.com



5TH & GOLDWATER
NWC INDIAN SCHOOL ROAD & GOLDWATER BLVD
SCOTTSDALE, AZ

Date
SEPTEMBER 05, 2025

Drawings and written material appearing
herein constitute original and unpublished
work of the architect and may not be
duplicated, used, or disclosed without
written consent of the architect.

© 2025 NELSEN PARTNERS, INC.

Project No.
23096.00

A112
REFUSE PLAN